
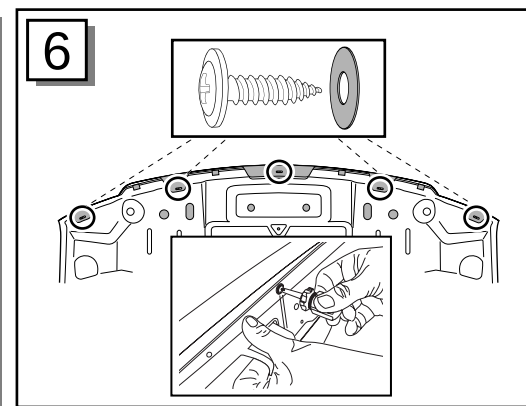
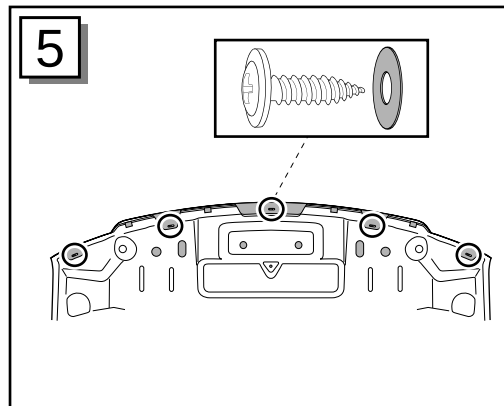
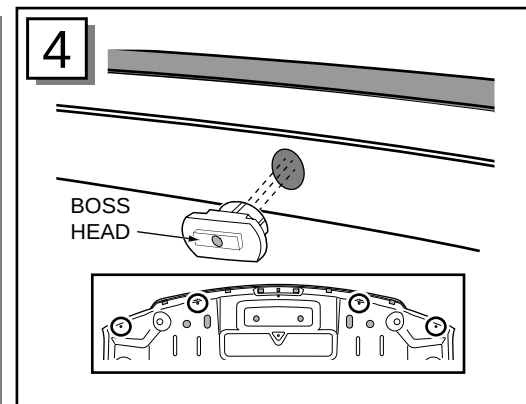
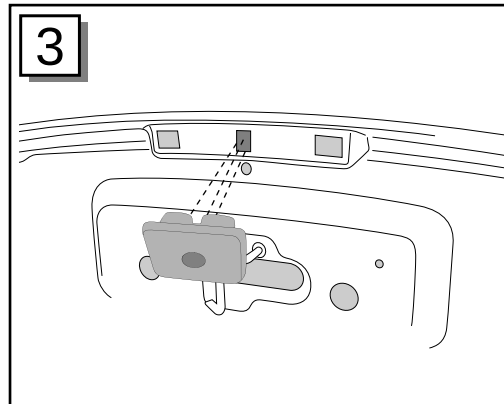
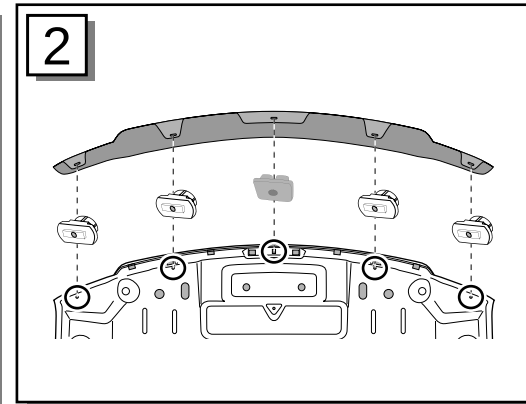


INSTALLATION INSTRUCTIONS

INSTALLATION INSTRUCTIONS

- 1 • Clean the vehicle before installation of the Hood Protector. Open the hood.
- 2 • Trial fit the Hood Protector. Note the holes corresponding to the holes in the Hood Protector tabs, as shown. Remove the Hood Protector.
- 3 • Note the rectangular hole corresponding to the slot in the center tab of the Hood Protector. Insert the square black screw plug into the rectangular hole, as shown. Ensure the correct orientation of the screw plug feet.
- 4 • Note the four (4) holes corresponding to the slots in the remaining Hood Protector tabs, Insert the gray screw plugs as shown. Ensure the raised boss heads of the screw plugs are parallel to the hood lip.
- 5 • Refit the Hood Protector. Loosely secure the Hood Protector to the center screw plug, with a screw and washer provided.
- 6 • Secure the Hood Protector to the gray screw plugs using the screws and washers provided. Ensure the boss head of the screw plugs locate correctly into the slot of the Hood Protector tabs. To prevent the screw plug from rotating, thumb pressure on the Hood Protector tabs may be required. Tighten the center screw.

To Clean: Use mild detergent and water solution (Do **NOT** use solvents). Avoid the use of automatic "Brush Style" car washes. When closing the hood, do **NOT** pull on Hood Protector.

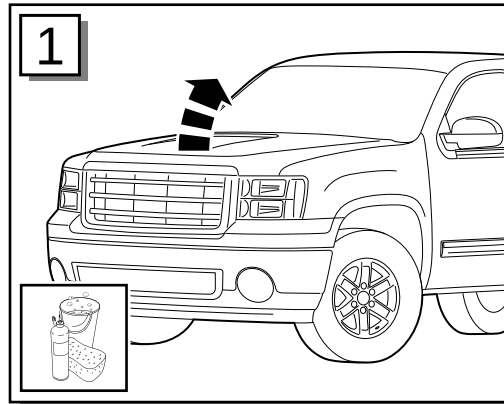

- Do not use power tools to install this product.
- No battery operated screw guns.
- The use of power tools during installation may void the product warranty.
- Do not overtighten.