


INSTALLATION INSTRUCTIONS



NO POWER TOOLS

- Do not use power tools to install this product.
- No battery operated screw guns.
- The use of power tools during installation may void the product warranty.
- Do not overtighten.



INSTALLATION INSTRUCTIONS

- 1• Clean and open the hood. Trial fit the Hood Protector centrally onto the hood. Note the four (4) holes in the hood corresponding to the four slots in the Hood Protector. Remove Hood Protector.
- 2• Install the screwplugs provided into the four (4) previously noted holes in hood. Ensure that the screwplug boss heads are parallel to the hood edge.
- 3• Refit Hood Protector. Ensure that the boss heads of the screw plugs do not rotate, by locating them correctly into the slots of the Hood protector tags, as shown. Secure Hood Protector to hood using screws and washers provided.


To Remove: Reverse above procedure.

To Clean: Use mild detergent and water solution. (Do **NOT** use solvents). Avoid the use of automatic "Brush Style" car washes. When closing the hood, do **NOT** pull on Hood Protector.


1

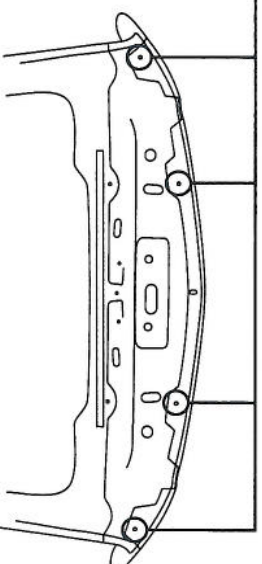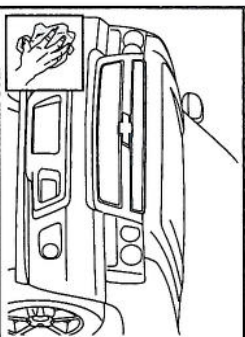



2



BOSS HEAD

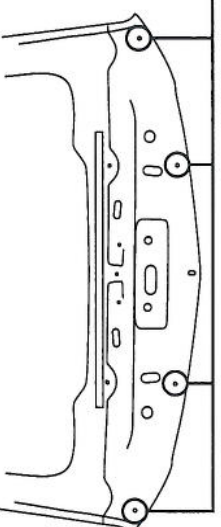

3

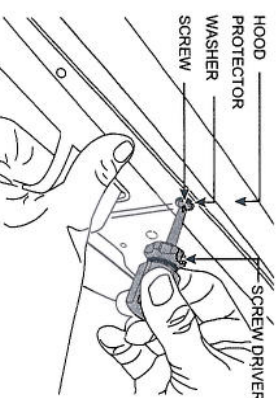

HOOD
PROTECTOR

WASHER

SCREW

SCREW DRIVER