




INSTALLATION  
INSTRUCTIONS  
HOOD PRODUCT








TOOLS REQUIRED

#2 PHILLIPS  
SCREWDRIVER


RATCHET WRENCH AND  
SOCKET OR  
COMBINATION WRENCH







- INSTALLATION INSTRUCTIONS**
- 1 • Thoroughly clean the hood and grille.  
• Open hood and remove 2 x 8mm hex head screws located at the bottom of the metal grille brace on either side of the grille.  
• Retain screws for later reinstallation.
  - 2 • Bring hood back down to a semi-closed position. Remove 7 x grille retaining scrivenets with a #2 phillips screwdriver.  
• Note, it may be necessary to squeeze the back side of these retention plugs by hand to help the screw back out of the scrivet base.  
• Retain scrivenets for later reinstallation.
  - 3 • Carefully remove grille by grabbing the top and bottom of one side and gently pulling upwards. This will disengage the top underside retention clips.  
• Repeat this same procedure for the opposite side and note that the grille will need to be completely removed and placed carefully aside to avoid any possible damage.  
• Clean this newly exposed area of the hood.
  - 4 • Open the hood and note the outer wing holes in the underside of hood as shown.  
• Install provided screw plugs into these holes for later mounting of the **Hood Product** outer wing area mounting tabs.
  - 5 • Remove **Hood Product** from packaging, fit **Hood Product** onto hood at the wing mounting tabs first and then the center.  
• Ensure the wing tabs are located onto the underside of the hood and that the center mounting tag cut-outs line up around the existing hood holes.  
• Make sure that the **Hood Product** is centrally located on the hood.

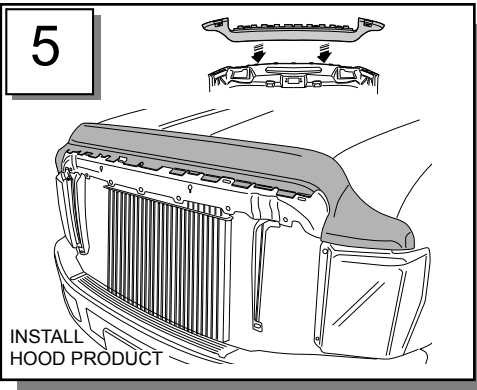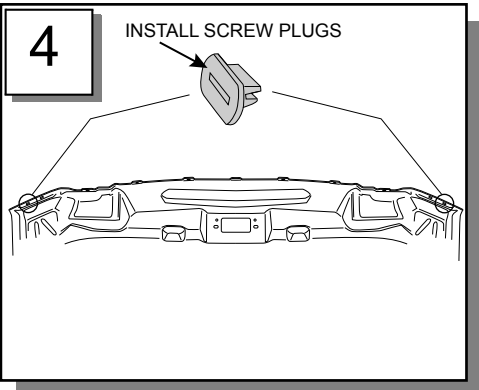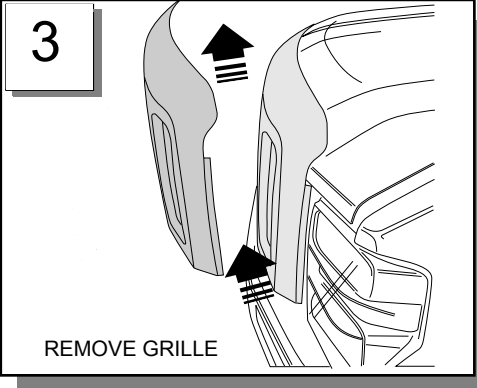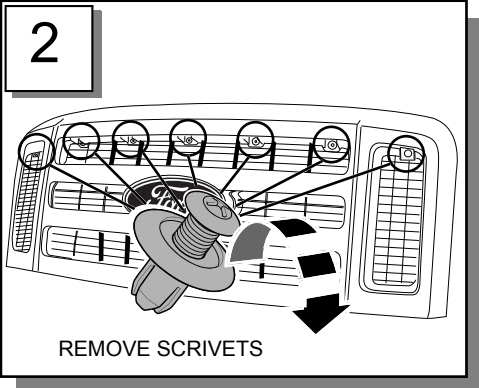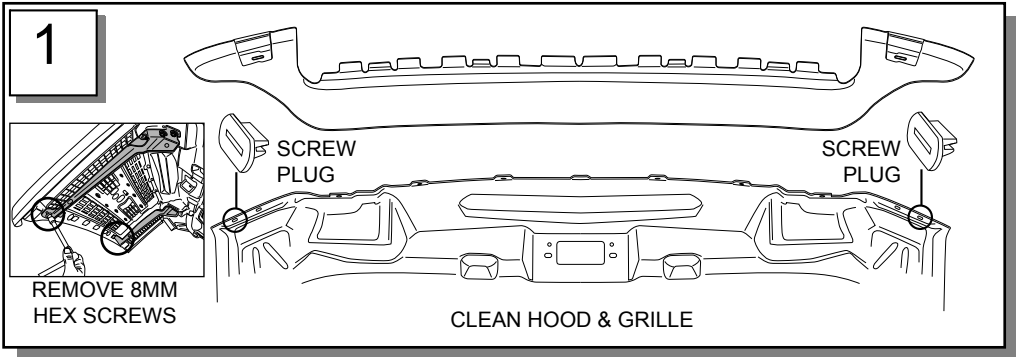

INSTALLATION  
INSTRUCTIONS  
HOOD PRODUCT

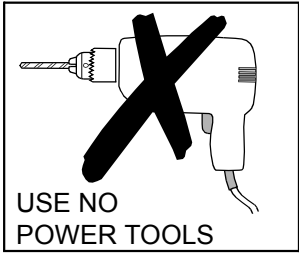

- INSTALLATION INSTRUCTIONS**
- 6 • Re-install the grille onto the hood, making sure that the protruding mounting points on the grille line up with the receiving holes in the hood.  
• Note, the grille will not completely snap back into these mountings as the thickness of the product will now hold it off slightly.
  - 7 • Re-install the originally removed 7 x scrivenets back into the grille to make sure that it is being securely held in place.
  - 8 • Carefully open the hood and install the screws and washers at the outer wing area tags to secure the **Hood Product** to the hood. Do not over tighten.
  - 9 • Re-install the originally removed 2 x 8mm hex head screws back into the bottom of the metal grille brace on either sided of the grille. Close Hood.

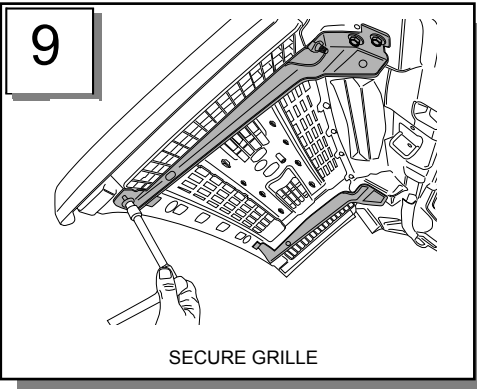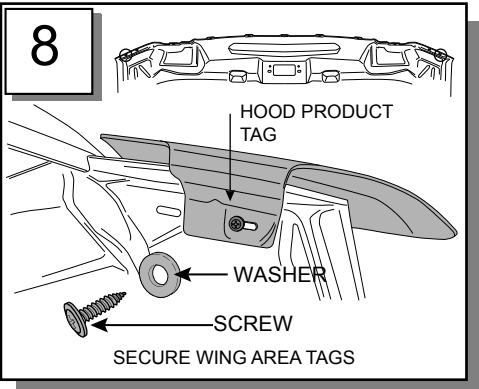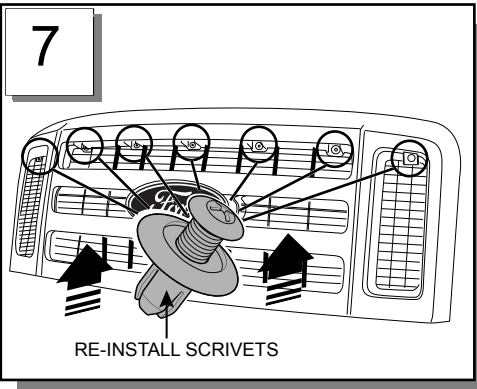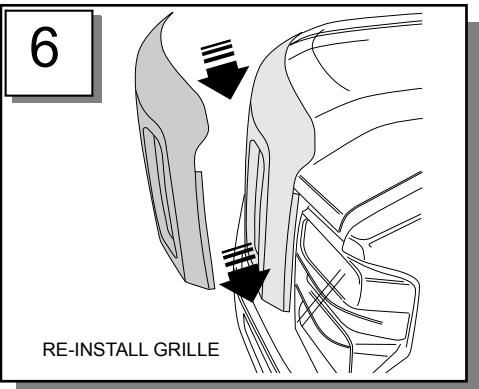

Total installation time should be less than 15 minutes with all the correct tools available and at hand.

**To remove:** Reverse above procedure.  
**To clean:** Use mild detergent and water solution. (Do NOT use solvents) Avoid the use of automatic "Brush Style" car washer. When closing the hood, do not pull on the Hood Product.