


INSTALLATION INSTRUCTIONS



NO POWER TOOLS

- Do not use power tools to install this product.
- No battery operated screw guns.
- The use of power tools during installation may void the product warranty.
- Do not overtighten.

INSTALLATION INSTRUCTIONS

- 1 • Clean and dry installation area thoroughly.
 - Open bonnet.
 - Remove the upper grill retaining screws from underside of grill.
- 2 • Trial fit **Hood Product** to hood. Insert **Hood Product** tag between grill and hood.

- Whilst holding **Hood Product** in position, re-secure grill section to hood.

- NOTE: A second person may be required to hold **Hood Product** in position.






- 3 • Clean with alcohol wipe provided, area on top and underside of hood corresponding to holes in outer edges of **Hood Product**.

- Adhere abrasive resistant tape strips to edge of hood corresponding to holes at either end of **Hood Product**.

- Ensure that only 1/2" of the tape folds under the lip.

- 4 • Position the spring section of clip over the abrasive resistant tape on the hood lip. Note: It is essential that no part of the clip contacts the top surface of the hood.

- 5 • Fasten the **Hood Product** wings to the clip with the phillips head screws and fiber washers provided.

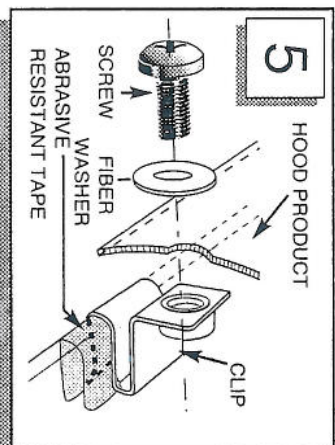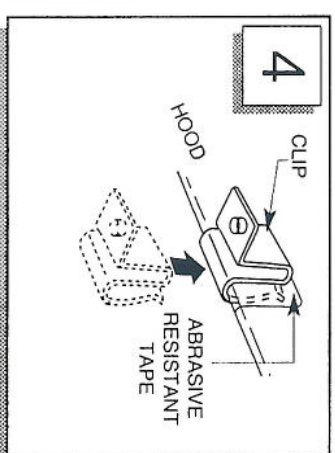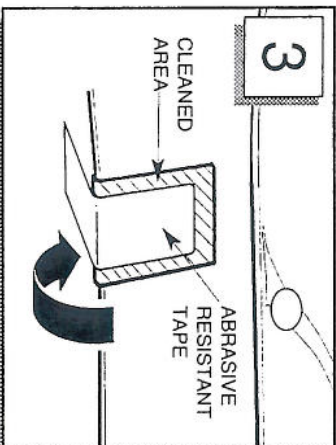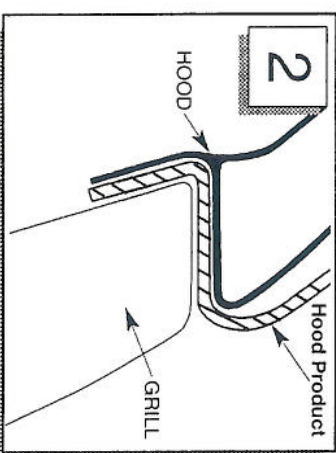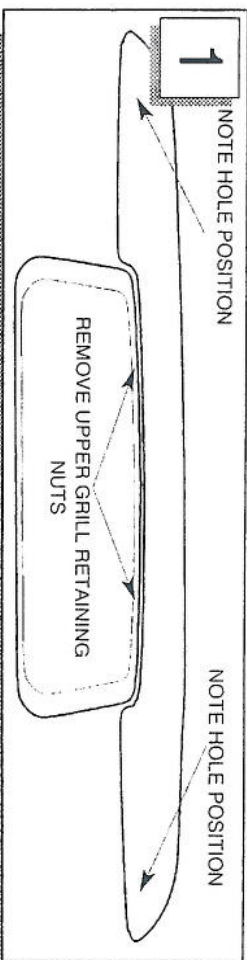

To Remove: Reverse above procedure.
To Clean: Use mild detergent and water solution. (Do NOT use solvents).
Avoid the use of automatic "Brush Style" car washes.
When closing the hood, do NOT slam hood down or pull on **Hood Product**.