

INSTALLATION INSTRUCTIONS



NO POWER TOOLS

- Do not use power tools to install this product.
 - No battery operated screw guns.
 - The use of power tools during installation may void the product warranty.
 - Do not overtighten.
- MADE IN AUSTRALIA

To Clean: Use mild detergent and water solution. (Do **NOT** use solvents). Avoid the use of automatic "Brush Style" car washers. When closing hood, do **NOT** pull on Hood Product.

INSTALLATION INSTRUCTIONS - HOOD PROTECTOR KIT



Figure 1. Cleaning hood areas

1. Thoroughly clean the front of the hood and raise the hood, as shown in figure 1.

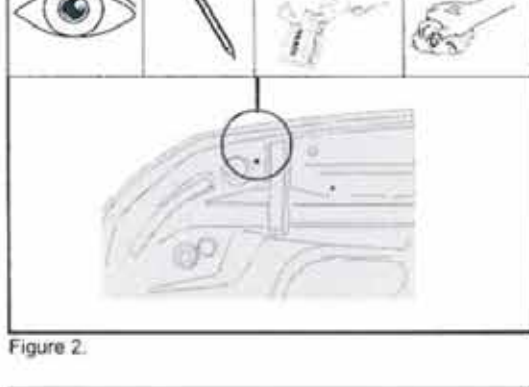


Figure 2.

2. Note the two outer holes in the underside of the hood. Clean the hood lip above these holes with the alcohol wipe provided and wipe with a dry clean cloth, as shown in figure 2.



Figure 3. Abrasive resistant tape installation

3. Adhere the abrasive resistant tape to the hood lip as per figure 3; half on the underside and half on the top of the hood.

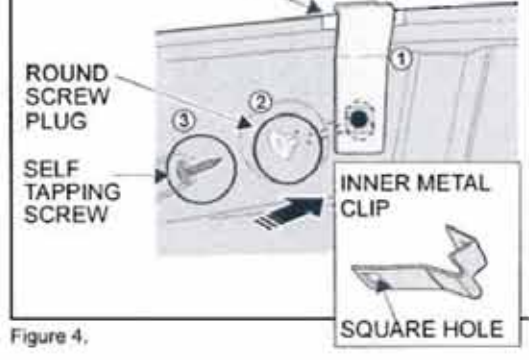


Figure 4.

4. Note the inner metal clips with the square hole. Insert these clips over the tape on the hood lip aligning the square hole in the clip with the round hole in the hood. Insert the round screw plug over the clip and into the round hole in the hood and secure with the self tapping screw provided. Ensure the square boss on the screw plug sits in the square hole in the clip.

NOTE: Failure to ensure that the clip rests on the abrasive resistant tape may result in permanent paint damage.

SUP382

1/4

INSTALLATION INSTRUCTIONS - HOOD PROTECTOR KIT



Figure 5.

5. Install the Hood Protector onto the hood and align the holes in the Hood Protector with the threaded holes in the inner metal clips, as shown in figure 5. Temporarily secure the Hood Protector, with screws and washers provided.

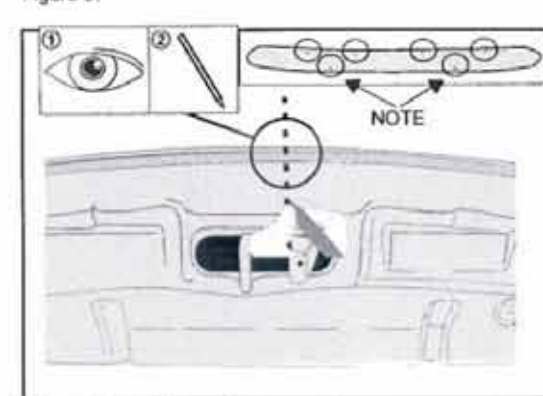


Figure 6. Mark the center clip positions

6. Note the center hole in Hood Protector that correspond to the underside of the hood. Mark the center of this position on the hood with a pencil, as per figure 6.

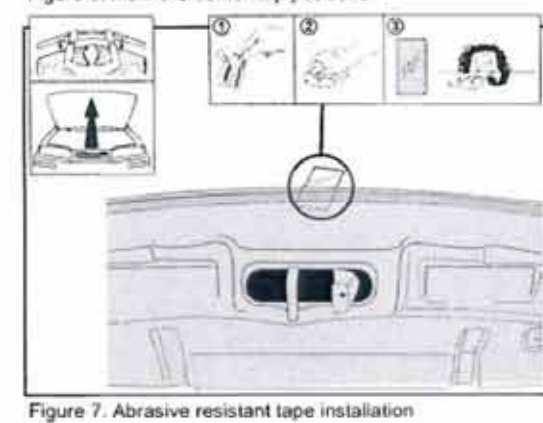


Figure 7. Abrasive resistant tape installation

7. Remove the Hood Protector and raise the hood. Clean the hood lip at the marked location with the alcohol wipe provided and wipe with a dry clean cloth. Adhere the abrasive resistant tape to the hood lip as per figure 7; half on the underside and half on the top of the hood.

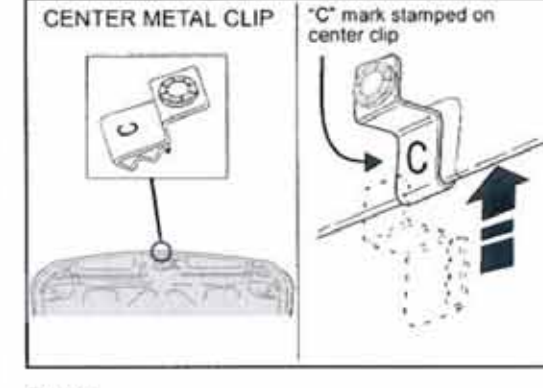


Figure 8.

8. Install the center metal clip onto the hood over the tape. Ensure clip is fully seated onto the hood lip. **NOTE: Failure to ensure that the clip rests on the abrasive resistant tape may result in permanent paint damage.**

2/4

INSTALLATION INSTRUCTIONS - HOOD PROTECTOR KIT

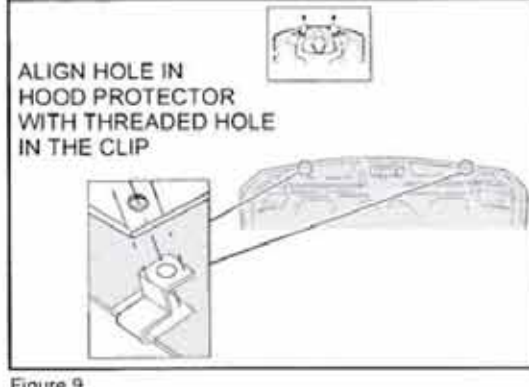


Figure 9.

9. Re-Install the Hood Protector onto the hood and align the holes in the Hood Protector with the threaded holes in the clips. It may be necessary to slide the center clip left to right to align the threaded hole with the Hood Protectors hole. As shown in figure 9.

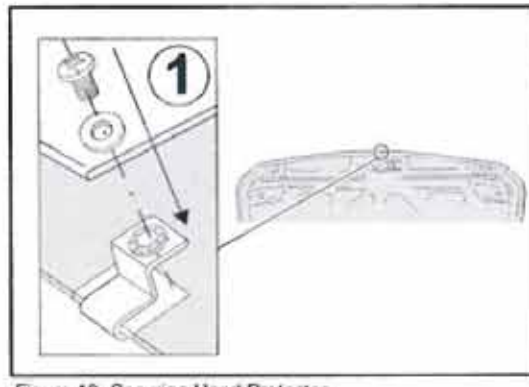


Figure 10. Securing Hood Protector

10. Secure the center of Hood Protector to metal clip with the screw and washer provided, as shown in figure 10.

NOTE: DO NOT OVER TIGHTEN SCREW.

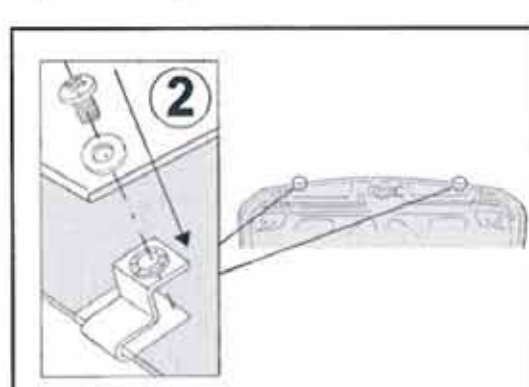


Figure 11. Securing Hood Protector

11. Secure the outer center of Hood Protector to metal clips with the screws and washers provided, as shown in figure 11.

NOTE: DO NOT OVER TIGHTEN SCREWS.



Figure 12.

12. At the wing clip locations, clean the areas with alcohol wipe provided and wipe with a dry clean cloth. Adhere the large tape to the hood lip as per figure 12; half on the underside and half on the top of the hood.

3/4

INSTALLATION INSTRUCTIONS - HOOD PROTECTOR KIT

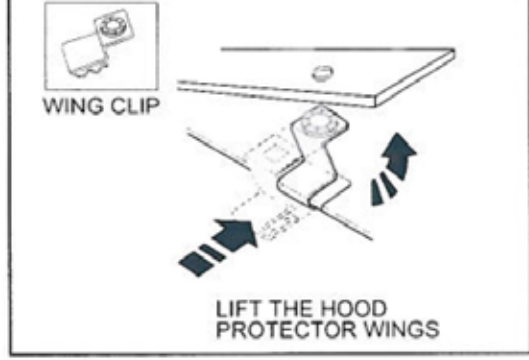


Figure 13.

13. Lift the Hood Protector and slide the wing clips over the hood edge at the noted wing clip positions, as shown in figure 13.

NOTE: Failure to ensure that the clip rests on the abrasive resistant tape may result in permanent paint damage.

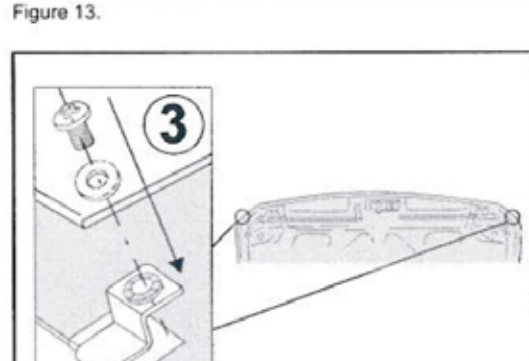


Figure 14. Securing Hood Protector

14. Secure the outer wing sections of Hood Protector to metal clips with the screws and washers provided, as shown in figure 14.

NOTE: DO NOT OVER TIGHTEN SCREWS.

To Remove: Reverse the above procedure.



Figure 15. Abrasive resistant tape installation

15. Gently lower the hood without fully closing so that the latch is not fully engaged. Note the area on top of the grille surround that sits directly below the three grille area clips. Clean these areas with the alcohol wipe provided. Adhere the abrasive resistant tape to each grille surround directly under the grille area clips.

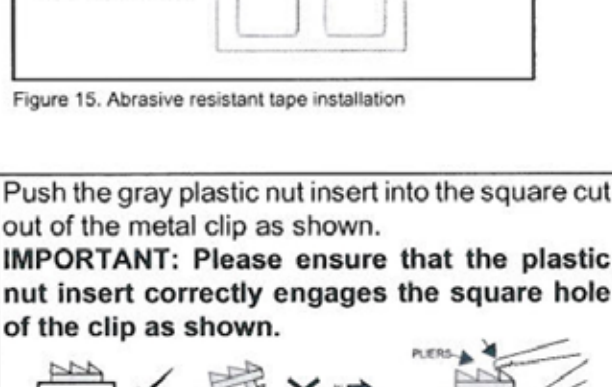


Figure 16. Installing the gray plastic nut insert



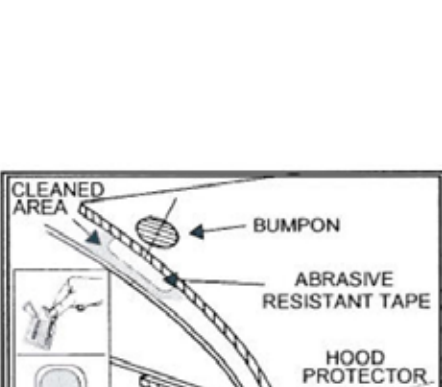


Figure 17. Installing the yellow abrasive resistant tape


Note where the bumpsons on the underside of Hood Protector contacts the hood paint work. Clean these areas with the alcohol wipe provided. Remove any residue with a dry clean cloth. Adhere small yellow backed abrasive resistant tape strips to these cleaned areas directly under bumpsons.




Do not use power tools to install this product. The use of power tools during installation may void the product warranty.



Do not slam hood.



Clean Hood Protector with a mild detergent and water solution.



Do not use abrasive cleaners.

4/4