

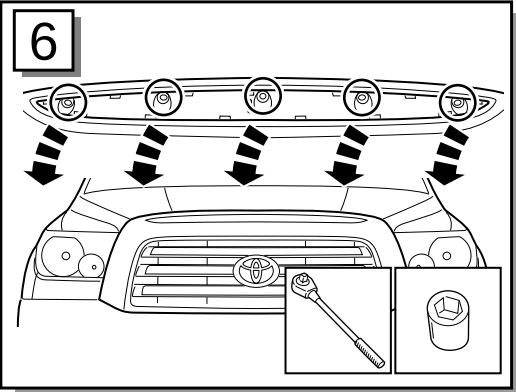
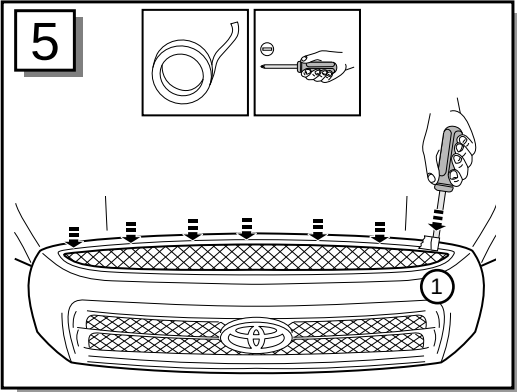
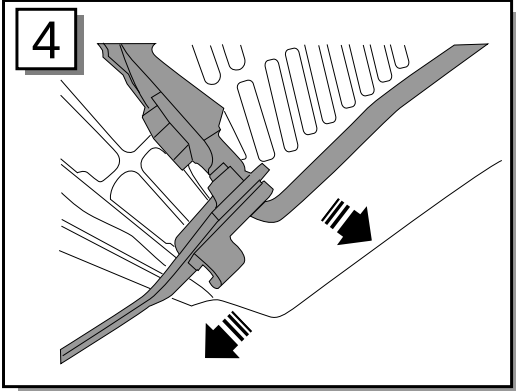
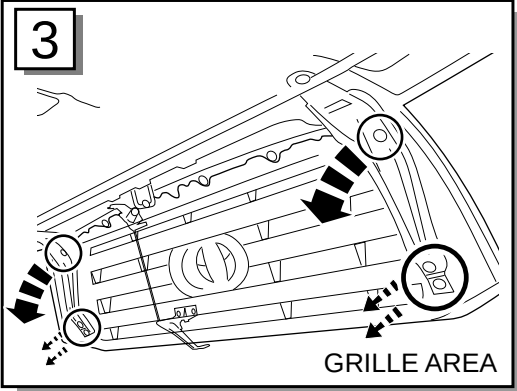


INSTALLATION
INSTRUCTIONS

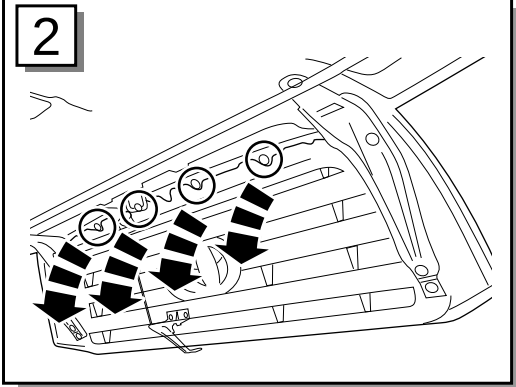

- Do not use power tools to install this product.
- No battery operated screw guns.
- The use of power tools during installation may void the product warranty.
- Do not overtighten.

- INSTALLATION INSTRUCTIONS**
- 1• Clean the hood and grille. Note the two holes in the underside of the hood, as shown. Install screw plugs in the holes. Ensure the raised head of each screw plug is parallel with the edge of the hood.
 - 2• Note and remove the four 10mm nuts/bolts holding the grille to the underside of the hood. Retain nuts/bolts for reinstallation.
 - 3• Also note and remove the four-six 10mm bolts holding the grille to the grille support brackets on the 2010-model, or the six 10mm nuts on the 07-09 model in these same areas. Retain all for reinstallation.
 - 4• Detach the hood latch release rod from the latch by unclipping the rod from the plastic bracket.
 - 5• On 07-09 models: Prepare the flat screwdriver for grille fascia removal, by wrapping the bladed end of the screwdriver with masking tape. Carefully place the masked screwdriver between the grille and fascia at the first position indicated. With light to moderate pressure, combine twisting the screwdriver with a manual finger push at the top edge of the fascia panel, down and away from the grille. Grab the fascia panel and keep pulling in this same direction to remove the panel completely. Take care not to damage the grille or fascia panel.
 - 6• ON 07-09 models: Remove the five socket-headed 10mm screws located behind the grille fascia panel. Retain screws for reinstallation.






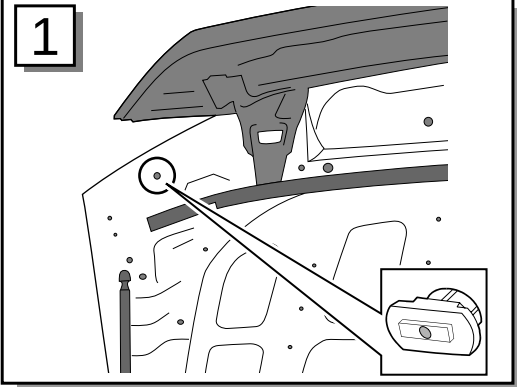


INSTALLATION
INSTRUCTIONS



- Do not use power tools to install this product.
- No battery operated screw guns.
- The use of power tools during installation may void the product warranty.
- Do not overtighten.

- INSTALLATION INSTRUCTIONS**
- 7• Remove the grille from the hood by gently pulling the grille parallel to the hood from one side upper corner, whilst holding and supporting the opposite side.
IMPORTANT NOTE: The potential for breaking the inner upper corner retention clips on the grille is likely. This is common and is no cause for concern, as the re-use of these is not essential for proper re-installation of the grille. Place the grille in a safe area.
 - 8• Clean the areas noted with the alcohol wipe provided. Wipe away any residue with a clean dry cloth. Adhere the abrasive resistant tape strips to the cleaned areas on each side of the hood. Ensure the tape locates on the grille shutline, as shown, so that half is inside and half outside the shutline.
 - 9• Position the hood approximately 1/3 open and centralize the Hood Product onto the hood. Ensure the slots in the wing tabs locate over the boss heads of the screw plugs previously fitted to the hoods underside. Secure product to the screw plugs at the wing area with the screws and washers provided.
 - 10• Re-install the grille to the hood of the 2010-models, by locating the studs in the grille to the plugs in the hood. On the 07-09 models re-install the five previously removed socket-headed 10mm screws.
 - 11• Re-install previously removed grille bracket nuts/bolts, and grille retention nuts/bolts to hood.
 - 12• Re-install the hood latch release rod to the latch by clipping the rod into the plastic bracket.

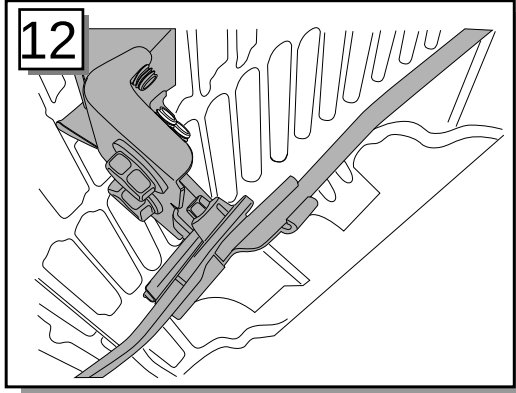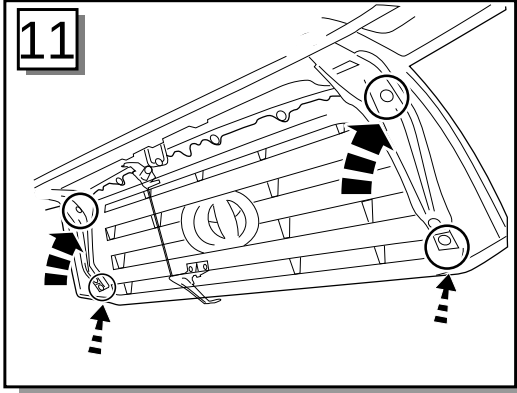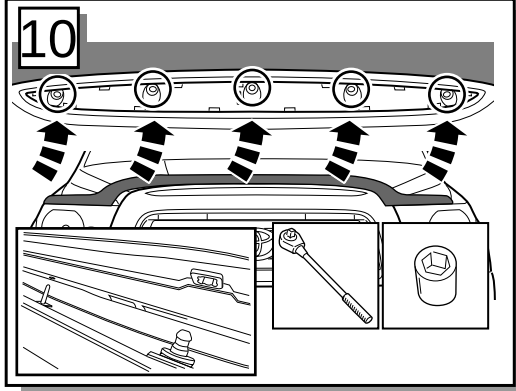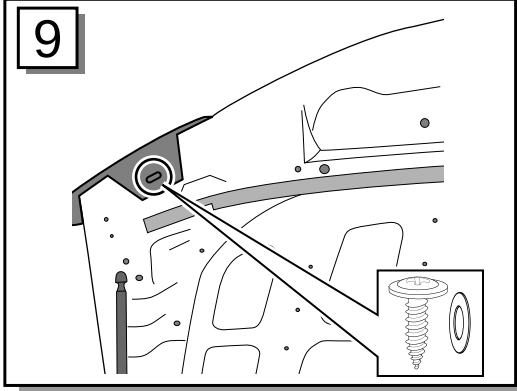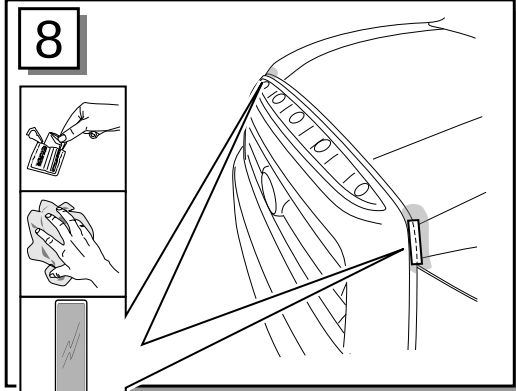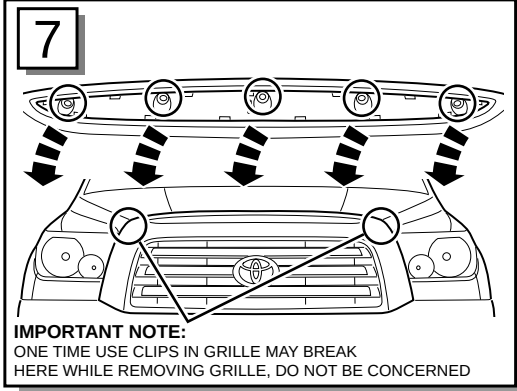


INSTALLATION
INSTRUCTIONS



- Do not use power tools to install this product.
- No battery operated screw guns.
- The use of power tools during installation may void the product warranty.
- Do not overtighten.

- INSTALLATION INSTRUCTIONS**
- 13• ON 07-09 models: Re-install the grille fascia panel, starting at the position indicated, and reversing the previous direction of removal. Ensure downward pressure is placed on the fascia while pushing into place, to ensure all mounting tabs locate correctly.

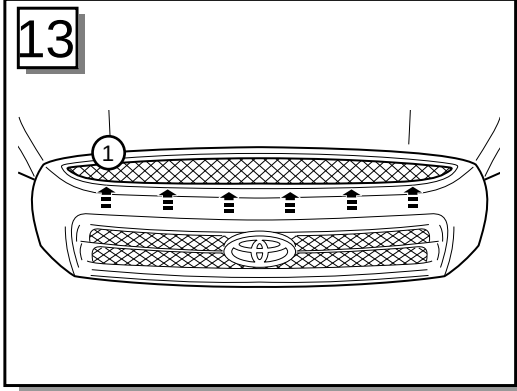

To Clean: Use mild detergent and water solution. (Do **NOT** use solvents). Avoid the use of automatic "Brush Style" car washes. When closing the hood, do **NOT** pull on Hood Protector.