

INSTALLATION INSTRUCTIONS



- Do not use power tools to install this product.
- No battery operated screw guns.
- The use of power tools during installation may void the product warranty.
- Do not overtighten.







INSTALLATION INSTRUCTIONS

1. Clean the hood and grille. Note the two holes in the underside of the hood, as shown. Install screw plugs in the holes.
2. Note and remove the four 10mm nuts holding the grille to the underside of the hood. Retain nuts for reinstallation.
3. Also note and remove the two 10mm nuts holding the grille to the grille support brackets. Retain all nuts for reinstallation.

4. Prepare the flat screwdriver for grille fascia removal, by wrapping the bladed end of the screwdriver with masking tape. Carefully place the masked screwdriver between the grille and fascia at the first position indicated. With light to moderate pressure, combine twisting the screwdriver with a manual finger push at the top edge of the fascia panel, down and away from the grille. Grab the fascia panel and keep pulling in this same direction to remove the panel completely. Take care not to damage the grille or fascia panel.

5. Remove the five socket-headed 10mm screws located behind the grille fascia panel. Retain screws for reinstallation.

6. Clean the areas noted with the alcohol wipe provided. Wipe away any residue with a clean dry cloth. Adhere the abrasive resistant tape strips to the cleaned areas on each side of the grille shutline, as shown.

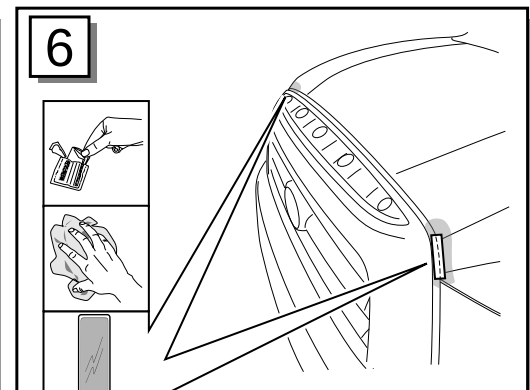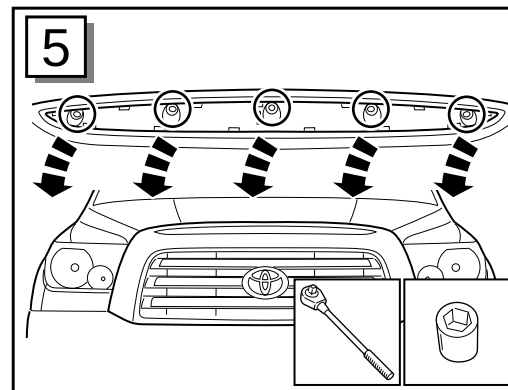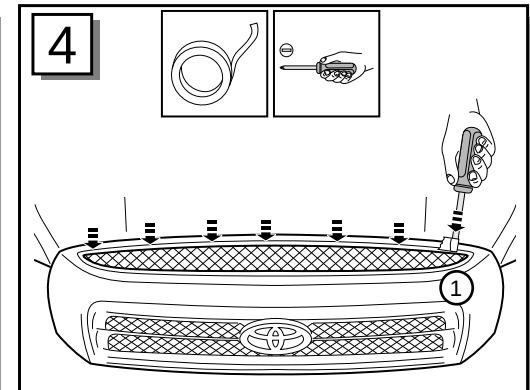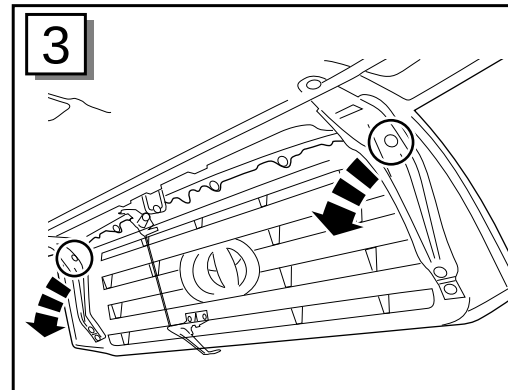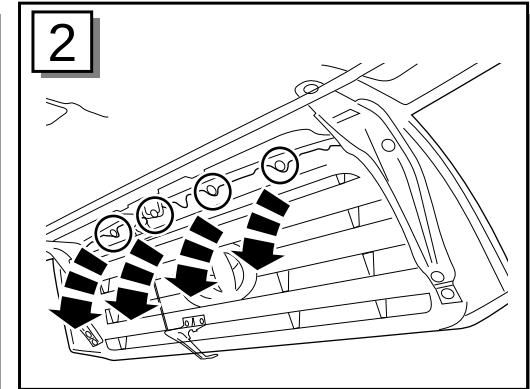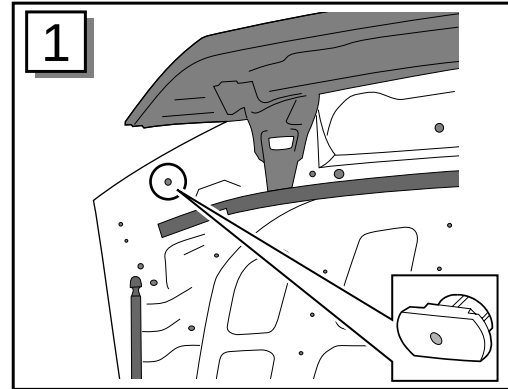

INSTALLATION INSTRUCTIONS



- Do not use power tools to install this product.
- No battery operated screw guns.
- The use of power tools during installation may void the product warranty.
- Do not overtighten.

INSTALLATION INSTRUCTIONS

- 7• Centralize the Hood Product onto the hood. Ensure the slots in the wing tabs locate over the boss heads of the screw plugs previously fitted to the hoods underside. Gently pull the grille away from the hood and ease the Hood Products center tab between the grille and hood. NOTE: It is important that the wing mounting tabs are locating on the hood underside before proceeding to Step 7.

- 8• Ensure the Hood Product is still centralized, then re-install the previously removed grille fascia panel screws.

- 9• Screw the double-headed screws into the screw plugs. If required, lock the screw plugs in place using a wrench. Ensure the double-headed screw is fully threaded into the screw plug. Ensure the wrench does not damage the hoods paintwork. Fit the Hood Protector over the double-threaded screws. Attach the Hood Protector to the four (4) double-threaded screws with the knurl nuts and gray rubber washers.

- 10• Re-install previously removed uppermost grille bracket nuts.

- 11• Re-install previously removed grille retaining nuts. Lower the hood.

- 12• Re-install the grille fascia panel, starting at the position indicated, and reversing the previous direction of removal. Ensure downward pressure is placed on the fascia while pushing into place, to ensure all mounting tabs locate correctly.

To Clean: Use mild detergent and water solution. (Do **NOT** use solvents). Avoid the use of automatic "Brush Style" car washes. When closing the hood, do **NOT** pull on Hood Protector.

