



INSTALLATION SHEET-GM/Chevy Composite Box


CLASSIC
PLATINUM, BLACKMAX,™
TUFF TONNO III™ & Saber
TONNO

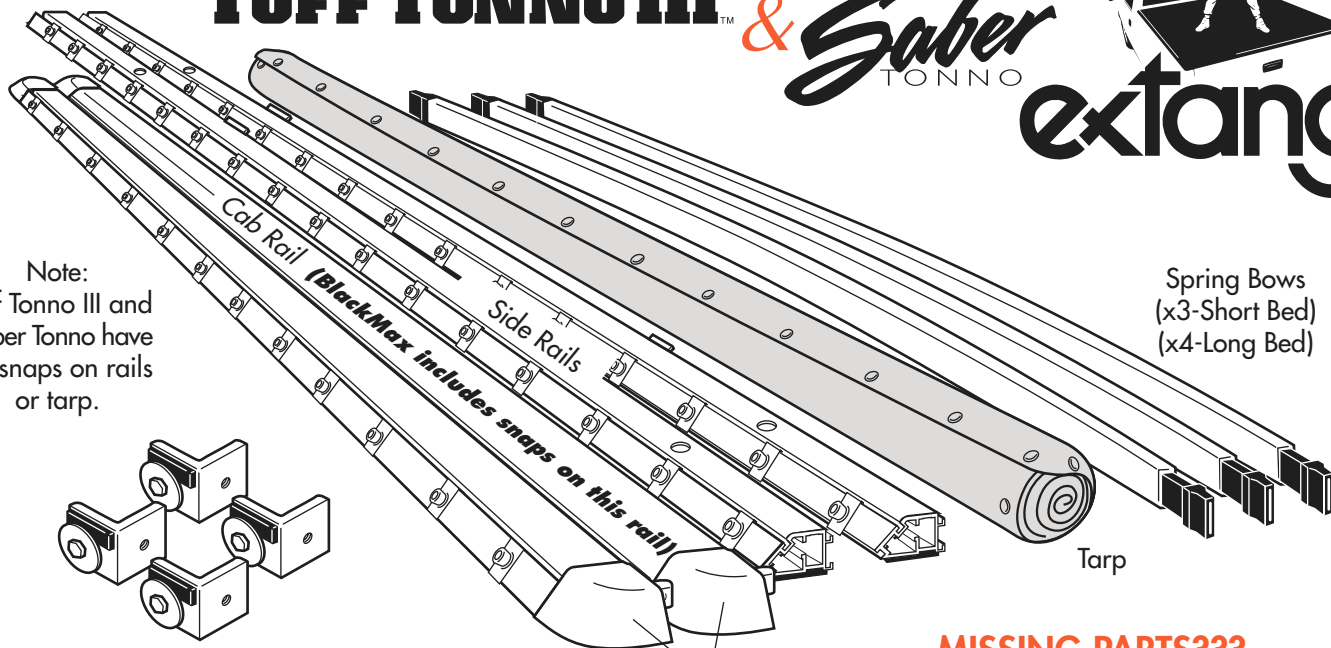

Note:
 Tuff Tonno III and
 Saber Tonno have
 no snaps on rails
 or tarp.



"L" Brackets and 2 1/4"
 long Screws
 (4 sets)




Corner Pieces

Allen Wrench





MISSING PARTS???
call Extang at 1-800-877-2588
 Any and all needed parts will be shipped to you
 directly. (DO NOT return whole kit to store)

NOTE:
BLACKMAX has snaps on all rails.

PARTS INCLUDED IN YOUR KIT. You may want to lay them out in this manner for accessibility.

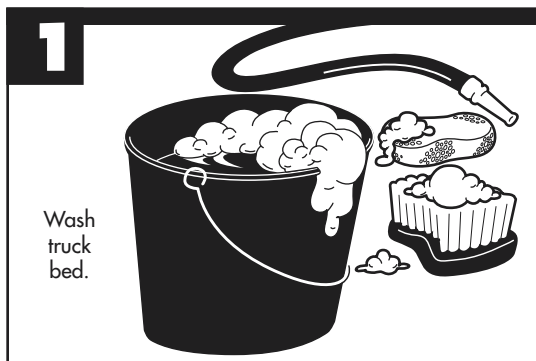

3 For Classic Platinum Only (This step does not apply to BlackMax)



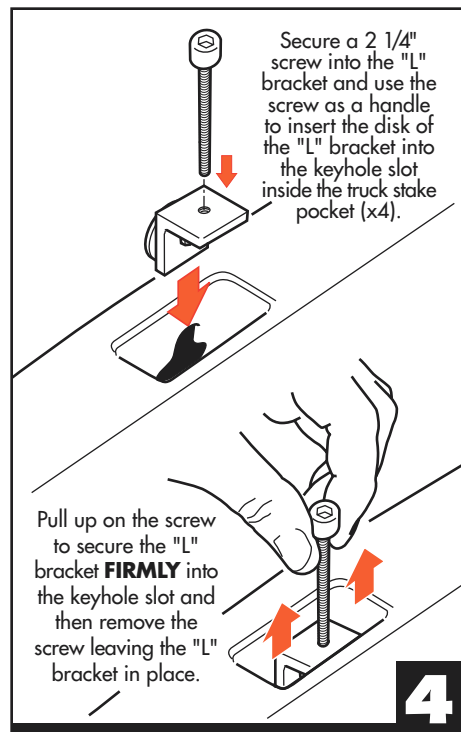

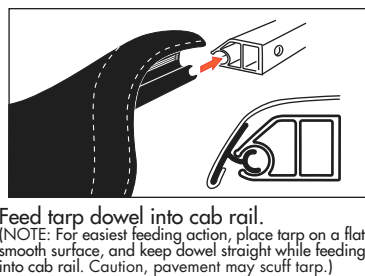



extang
 Stands for Quality



Extang Corporation
 1901 E. Ellsworth Rd.
 Ann Arbor, MI 48108
 734 677-0444, Fax: 734 677-8409

Visit us at:
www.extang.com


Item No. 0009-1002 Printed in U.S.A.

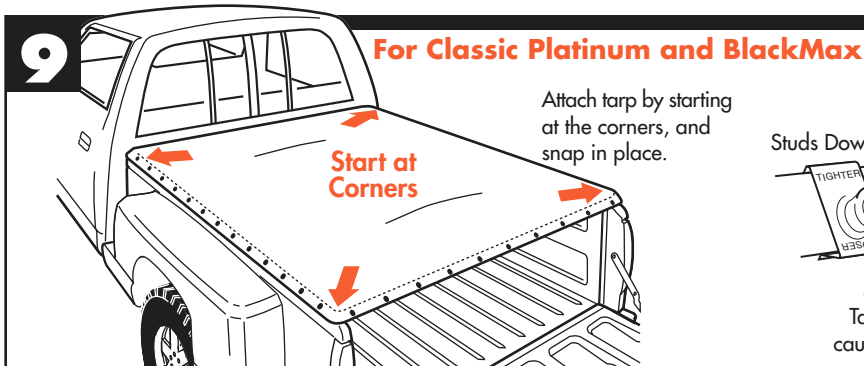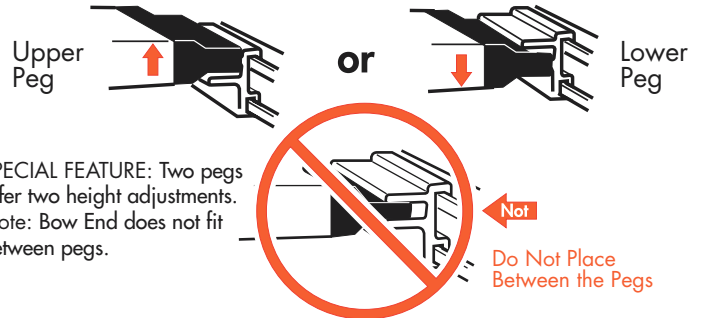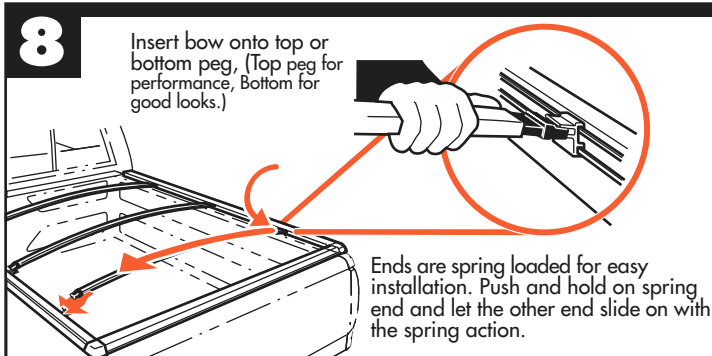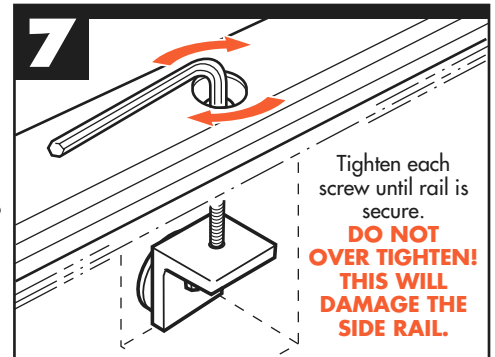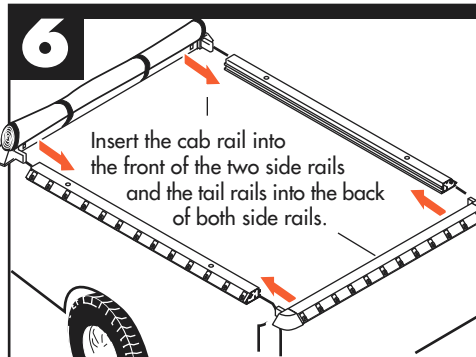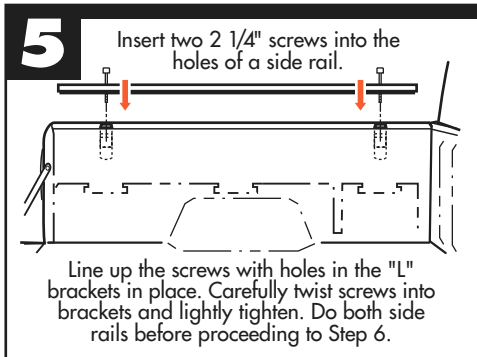


SPECIAL FEATURE Weather-adjustable Snaps

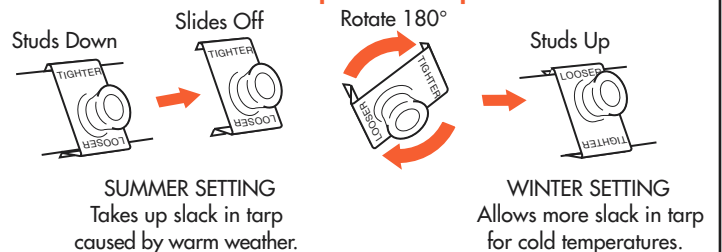


A. Release lever on both corners of tailgate rail and tilt up rail.

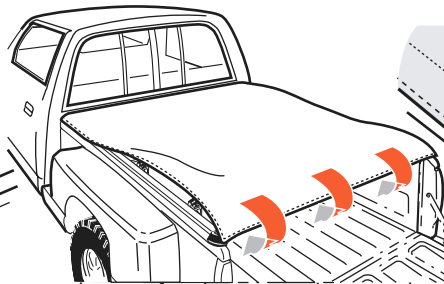

B. Attach tarp at front by pressing down on edge of tarp with the palms of your hands (about only 12 inches on each side). Then hook tarp to the tails rail's groove and click down to tighten tarp. See close-up.




Close-up of downward rotation of rear rail. You will feel the "snap" effect and see it tighten snugly.

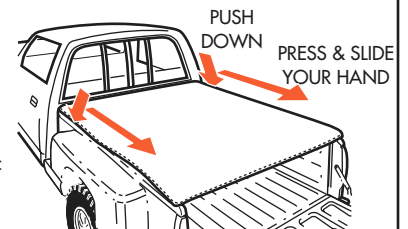


C. Finish attaching tarp along each side by pushing down and sliding your hand towards each corner. You can feel the "grip" action.

For Tuff Tonno III:


For Saber Tonno:




A. Attach tarp from front corner (12 inches) Repeat for each side. **Note: Pull tarp out while pressing down in center of the side strip to flex hook open for easy attachment.**

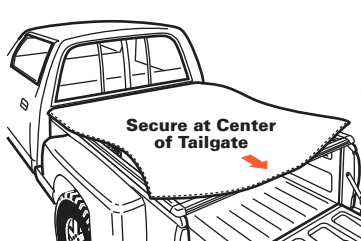

B. Secure tarp at the middle of tailgate rail.



C. Finish attaching tarp along each side by pushing down and sliding your hand front to rear, and on tailgate rail, by pressing out from the center.

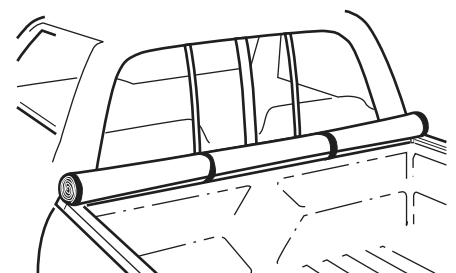

EASY USE OF TRUCK BED

Tarp may be rolled up and secured with Velcro® for bulk hauling