



Mounting Instructions for KC #368 C20 LED Bar & Grill Mount Bracket Set for Jeep JK

Thanks for choosing a KC HiLiTES product. We take pride in building the highest quality, best engineered systems possible. Your satisfaction with our product is important, so if you have any questions, please call our customer service line at 800-528-0950. **For warranty information, visit our website at www.kchilites.com.**


NOTE - This bracket set is designed for the KC 335 20" LED bar only.

Parts Included

- 1 - 20" LED light bar with wiring (KC 335)
- 1 - Grill mount bracket set
- 4 - 1/4 x 3/4 Bolt
- 4 - 1/4 SAE Flat Washer
- 4 - 1/4 Flange Nut


PREPARING TO MOUNT THE BRACKETS

1. Remove the grill from the front of the Jeep. This is simply done by opening the hood and removing the plastic fasteners from the top of the grill, unplugging the running lights and giving a swift pull on the bottom of the grill.
2. Remove the two plastic Christmas tree fasteners (**photo A**) from the core support that holds the rubber air skirting on each side. (**Do not discard, these will be re-used.**) These holes will be used for mounting the brackets.

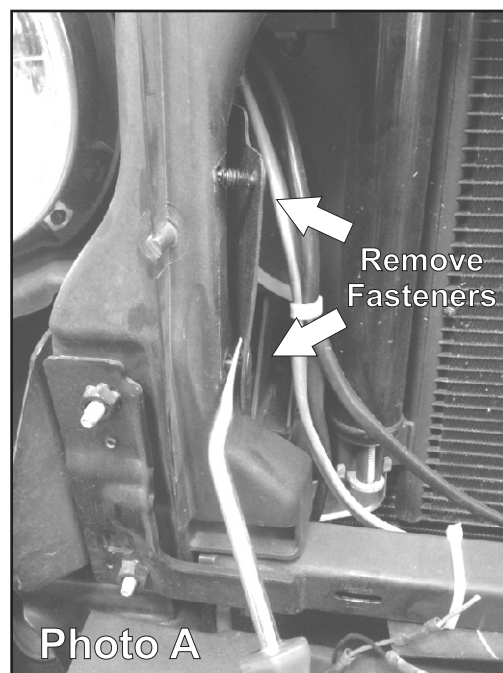

MOUNTING THE BRACKETS AND BAR

1. The brackets can be positioned for high or low mounting of the 20" LED by swapping the brackets. The brackets when mounted in either position will be approximately 21.5" apart at the LED mounting point.
2. Using the larger of the two sets of holes (**photo B**) and the supplied 1/4" hardware, attach and hand tighten each LED bracket to the core support. The smaller holes will be used to re-attach the rubber skirting with the Christmas tree fasteners. Once all bolts have been installed, tighten securely.
3. Re-install the grill with the LED brackets extending through the outer grill slats. Plug in your running lights.
4. Install your KC 335 20" LED bar to the brackets using the hardware supplied with the LED. Wire the light according to the instructions included with the LED bar.

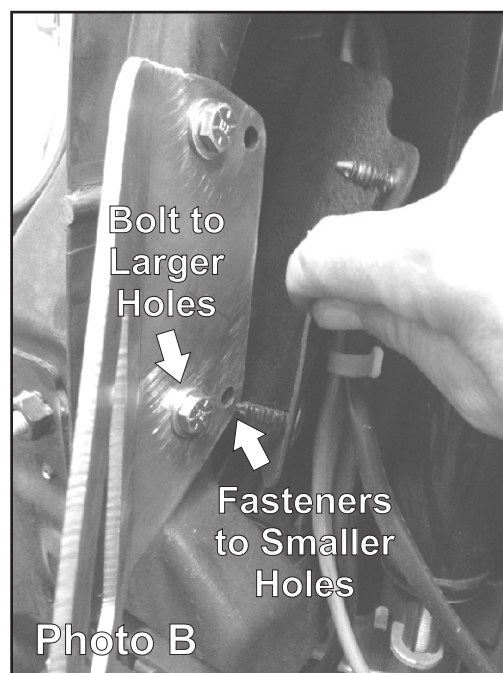

YOU'RE DONE