



Instructions for KC #75030 Grille and C10 10" LED bar for Jeep Wrangler 2007 - 13


Thanks for choosing a KC HiLiTES product. We take pride in building the highest quality, best engineered systems possible. Your satisfaction with our product is important, so if you have any questions, please call our customer service line at 800-528-0950. For warranty information, visit our website at www.kchilites.com.

PLEASE READ

- ***KC HiLiTES strongly recommends professional automotive & aftermarket accessory knowledge for proper installation of this grill.***
- ***You will be cutting the factory grill, returning back to stock may not be possible once completed.***

STEP 1 - Open the hood and remove the front grille by removing the clips on top and unplugging the bottom turn signals. Pull them out from the bottom for removal.

STEP 2 - To install your new grille you will need to cut out the metal bars in the center with a disc cutter or saw. The image below shows the area to be cut out.

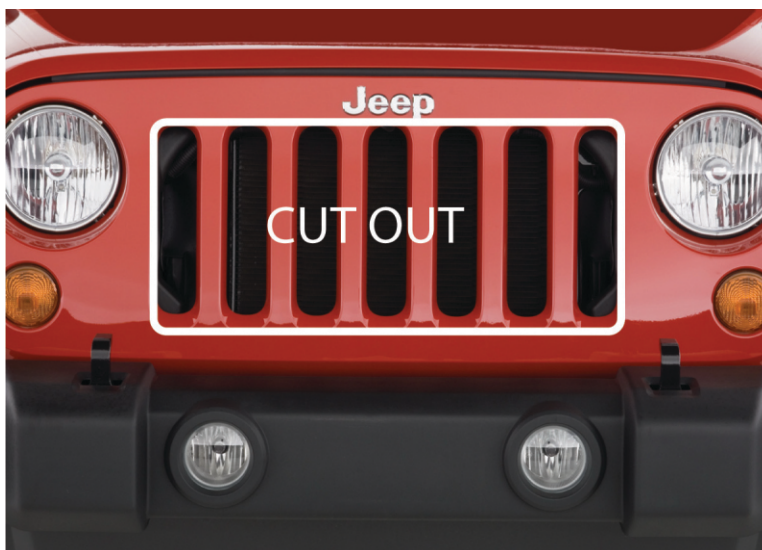

STEP 3 - Before installing the new grille, install the LED bar and tighten securely. Ensure the LED cable is fed to a location that can easily be reached for connecting to the harness after the grille is in place. Lay the new grille in place and attach the provided brackets to the back of the grille and tighten.



STEP 4 - Re-install the front fascia by inserting the turn signals back into place and re-connecting them. Push the bottom clips back in place along with the clips along the top.

STEP 5 - Wire your LED bar according to the instructions included with the bar.