



44705

2009 HONDA
PILOT

44705

2009 HONDA
PILOT

2009 HONDA PILOT
SPORT SERIES MESH GRILLE


Tools Required:

Phillip Screwdriver (std. & short length)
Slotted Screwdriver
10mm Socket
Die Grinder

Hardware / Parts Included:

1 Sport Series Mesh Grille
7 2 3/4" #6 Threaded Hooks
7 6/32 Nylon Lock Nuts
7 L Brackets


Read and understand instructions before attempting installation

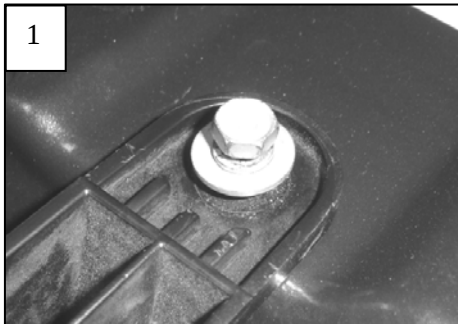

Step 1

Remove the fasteners holding the radiator cover in place; remove the cover. Remove the bolts securing the bumper cover to the core support (located near the radiator mounts) (1). Pull the bumper cover forward; remove the five plastic pop fasteners securing the grille to the bumper cover. Separate the grille from the vehicle.

If a bumper grille is going to be installed; install at this time and then proceed to Step 2.

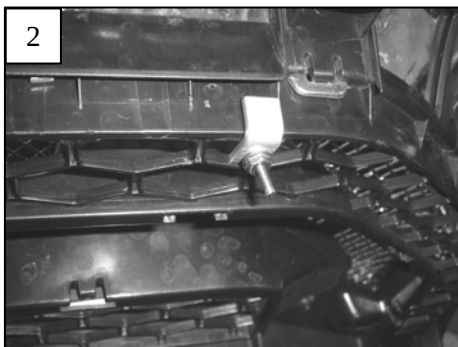

Step 2

Center the grille in place. Hook the rounded end of the hooks to the mesh. Make sure that the threaded hooks are evenly spaced around the perimeter of the grille. From the backside place an L Bracket and nylon lock nut onto each threaded hook. Tighten till snug. Using a die grinder and trim the remaining excess threaded area. Re-install the grille assembly and radiator cover onto the vehicle. ***Thank you for purchasing a T-Rex Billet Grille.***

10/13/08