

Sport Sway Bar Kit 22806 AUDI TT

*Thank you for your purchase from our new line of Audi parts.
Please call us at 877 - 4NO - ROLL if you have any questions
regarding the service or installation of your Hotchkis Performance products.*

Installation of Hotchkis Front Sway Bar

1F **Raising Vehicle**

Raise front of the vehicle by using a 4 post lift or drive-on ramps. Securely block the rear wheels of the vehicle. Do not remove the front wheels during installation for safety.



2F **Observe Orientation Of the Bar**

Remove the lower splash shield, and observe the location and orientation of the front swaybar.




3F Remove End Links

Locate and remove the lower end link nuts from both sides, and push links aside.



4F Remove Engine Mount

Locate and remove lower engine mount that attaches to subframe. The engine may want to shift forward which is ok.

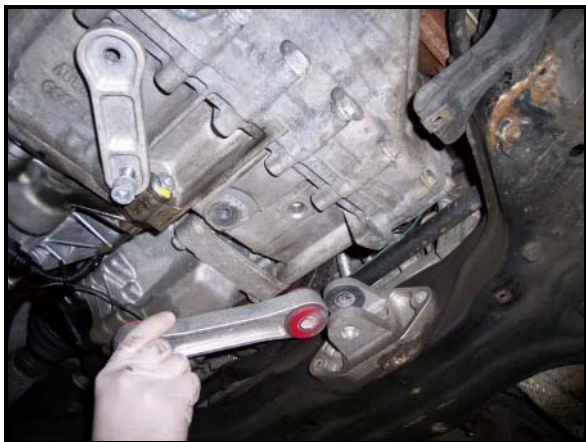

5F Remove Exhaust Hanger

Use a pry bar to remove the exhaust hanger located behind subframe.




6F Ride Height Sensor

Locate the ride height sensor located on the drivers side lower control arm, and remove the nut from the stud that attaches the sensor to the arm. (Be careful, this part can break easily).



7F Sub Frame

Support the sub frame with a jack, and locate and remove the 4 sub frame bolts that attach it to the chassis. Lower the jack until the sub frame is at full droop, and slightly pry down until you can access the sway bar bolts. (Don't worry, it will not fall being that it is still attached to the struts.)

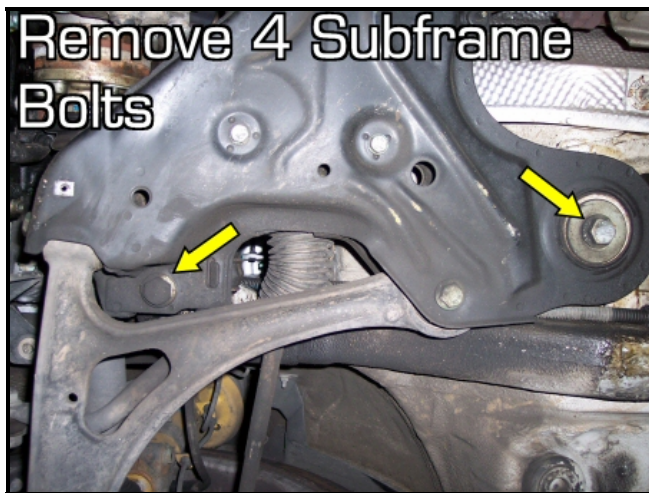

8F Remove the Sway Bar


Now remove the sway bar brackets that attach it to the sub frame. The drivers side bracket has a clamp for the power steering lines that must be removed in order to completely remove the bracket. (It does not need to be re-installed.) Now you can remove the sway bar.



9F Installation

Place the new swaybar next to the factory bar so that you will be familiar with the orientation that the bar is installed. Apply a good amount of the silicon grease that is supplied with the bushings, and install the bushings on the bar. After the swaybar is mounted the subframe, there is a line clamp bolted to the front of the rack & pinion on the passenger side that needs to be rotated 180 degrees in order to allow free articulation of the sway bar.

Now the rest of the installation can be done in reverse order as the removal. You may need a jack to help place the subframe in the proper location.

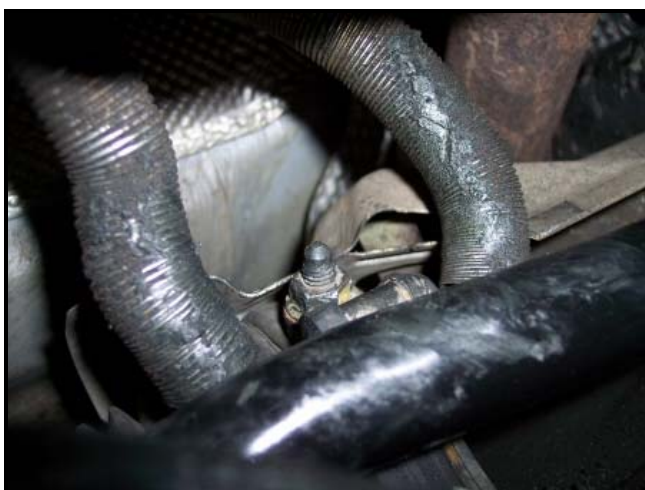



- 10F **Double Check Hardware**
Make sure all hardware is fully tightened before driving the vehicle.

Installation of Hotchkis Rear Sway Bar

1R **Raising Car**

Removal of the rear sway bar needs to be done at ride height, so the vehicle must be raised by a flat alignment style rack, or place the rear of the vehicle on ramps and securely block the front wheels.



2R **Observe Rear Bar**

Once the car is raised, observe the position of the rear bar and take note of it's orientation.

3R **Exhaust**

Remove the bolts that attach the rear exhaust hangers to the chassis and carefully lower the exhaust.





4R Heat Shield

Locate and remove the bolts that hold the heat shield to the chassis, and remove the heat shield so you can access the sway bar.



5R End Links

Remove the nuts that attach the end links to the sway bar. The end links do not need to be removed yet.



6R **Sway Bar**

Remove the bolts that attach the sway bar brackets to the chassis and lower the sway bar. You will now be able to remove the sway bar from the end links.

**Detach Bushing
Brackets**




Remove OEM Bar



7R **Installation**

Place the new sway bar next to the factory bar so that you are familiar with the orientation that it will be installed. Grease and install the bushings. The rest of the installation can be done in reverse order as the removal. Reuse the heat shield tap you cut off from the OEM bushing bracket.



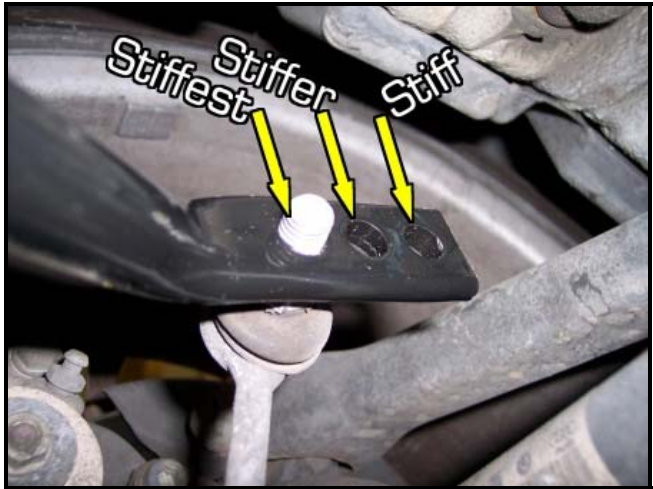

- 8R **Double Check Hardware**
Make sure all hardware is tight before driving the vehicle.



HOTCHKIS PERFORMANCE WARRANTY POLICY

Effective January 1, 2000. Supersedes all previous policy statements. Policies are subject to change without notice. Hotchkis Performance is not responsible for printing errors.

If you purchased your Hotchkis Performance product from an authorized dealer, you are covered by the terms of this policy. All claims however, must be submitted **THROUGH YOUR DEALER** not to Hotchkis Performance directly.

Return Policy:

We want you to be completely satisfied with your Hotchkis Performance product. In case you're not, you can exchange or return it within 30 days of the purchase date. To obtain a full refund, excluding freight, please contact our Customer Service Department at (562) 907-7757. You will be assigned a Returned Goods Authorization Number (RGA). The package you return must show the RGA on the outside of the package, include the original invoice and be shipped prepaid to our facility. The part has to be in its original packaging materials and be in a sellable condition. For parts presenting signs of use, only warranty claims will be accepted. Exchanges or refunds can be made after 30 days with a 20% restocking charge.

Warranty Claim:

Hotchkis Performance warrants its products against materials and workmanship failure for the term of 36 months (3 year) from the date of purchase and only up to the amount paid. If the product is determined to be defective, Hotchkis Performance will repair, replace or refund its value at Hotchkis Performance's discretion. Any repaired or replaced product will be returned to the sender freight prepaid.

How to File a Warranty Claim:

The answer to ALL the following questions should be **YES** before contacting our Customer Service Department.

- Is the part appropriate to your application?
- Did you carefully and thoroughly read the instructions provided along with the part?
- Do you have the proof of purchase?
- Are you the original purchaser?
- Is the part unmodified and clean?
- Is the return date within 36 months from the purchase date?
- Is the reason for return a legitimate product defect?

If the answer to all these questions is YES, please contact our Customer Service Department at (562) 907-7757. You will be given a Returned Goods Authorization Number (RGA) valid for 60 days. You will also be asked to ship the part prepaid to our facility. All shipments MUST be prepaid, include the original invoice and show the RGA on the outside of the package, otherwise it will be refused. Please include a brief explanation letter in order to expedite the warranty analysis process.

What doesn't this Warranty Cover?

The costs not covered by this warranty include but are not limited to:

- Removal, installation, shipment and insurance costs.
- Improper installation or maintenance.
- Misuse or abuse, negligence, off-road and/or racing applications.
- Damage to related components.
- Normal wear and tear.
- Costs incurred due to down time of vehicle.
- Alterations on the original design or unauthorized repairs.

Items offered but not manufactured by Hotchkis Performance are warranted according to the manufacturers terms and are not the responsibility of Hotchkis Performance.

All warranties implied by law are limited in duration of this warranty. You have specific rights that may vary from state to state.

12035 BURKE ST. SUITE 13 SANTA FE SPRINGS, CA 90670
PHONE: (562) 907-7757 FAX: (562) 907-7765