

Installation Instructions for 70240, 70245 & 70248


High Back Sport Seat

Driver or Passenger Side


A. There are four holes at the bottom of the seat.



B. Place spacers provided in the seat rail kit over all the holes.

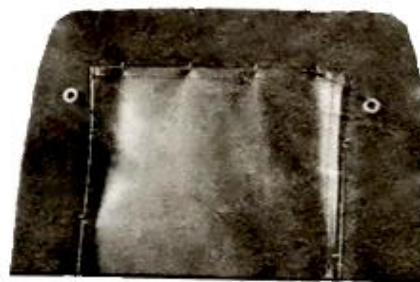

C. Install seat rail with the metal plate facing inward.

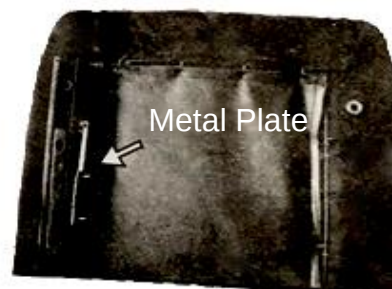

D. After aligning both rails, install the handle bar on both rails.

