

Installation Instructions for 81412


Heavy Duty Tool Cart

220 lb. Capacity


ATTENTION:

1. Before opening the drawer, first open the sliding tops. The inverse step is necessary when locking the drawer.
2. Only one drawer can pull out at one time, or the cart may tip. Before pulling out one drawer, make sure the other one has been pushed fully in.
3. Don't put heavy load on the drawer when it's open. The cart may tip.
4. Each drawer load is 17.64 lbs. (8kg), upper tray load is 88.18 lbs. (40kg), bottom tray load is 88.18 lbs. (40kg) total load is 220.46 lbs. (100kg). Never exceed the load capacity or the product may be damaged.


32.66"

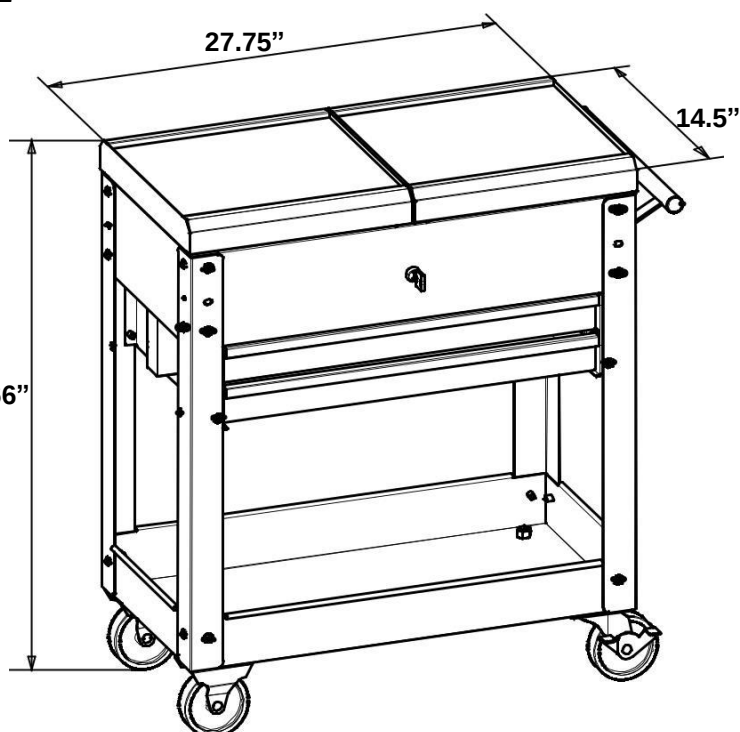


Parts List

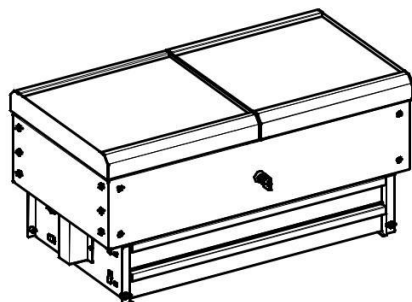

A) UPPER TRAY WITH 2 RUBBER LINERS
1PC



B) PILLAR 4PCS




C) HANDLE 1PC



E) RIGID CASTER 2PCS



F) SWIVEL CASTER 2PCS

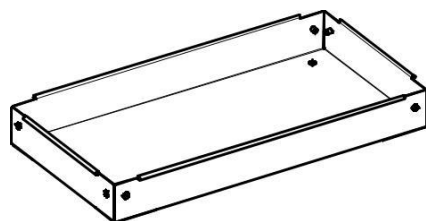

D) BOTTOM TRAY 1PC




G) BOLT M6 x 12 (30+2) PCS




H) NUT M12 4PCS

1

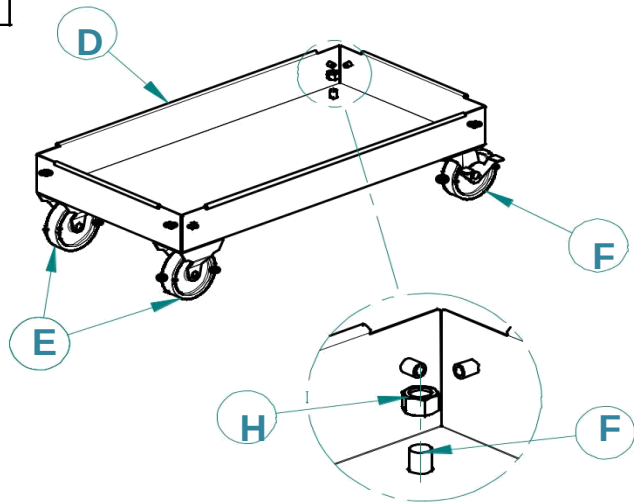


Note: Always put the same casters on one side.


2

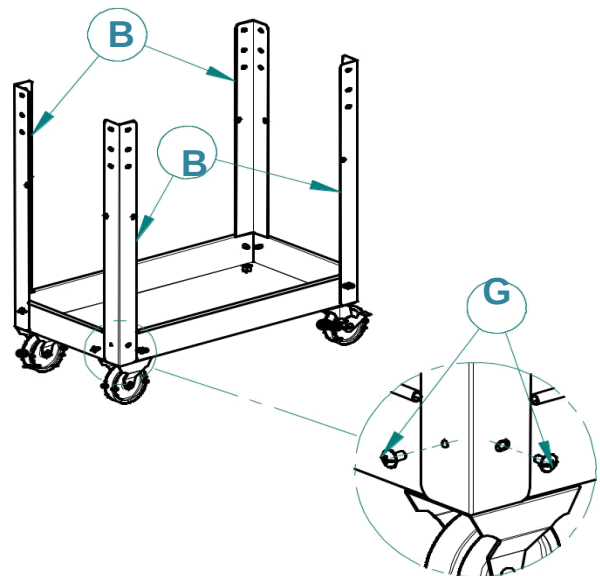

3

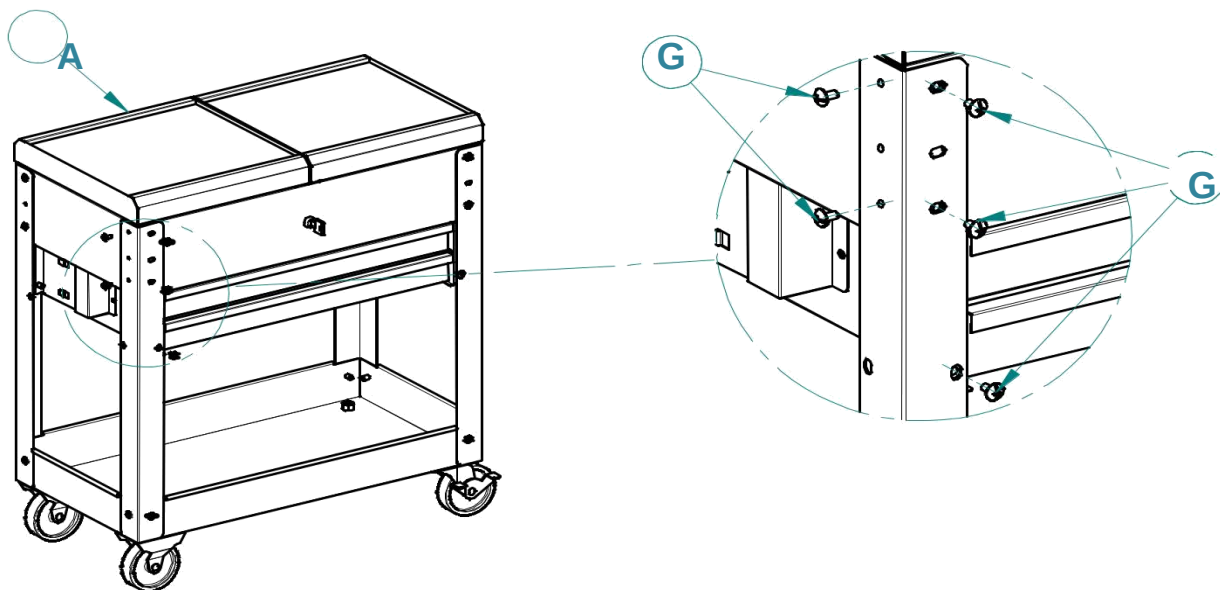


4

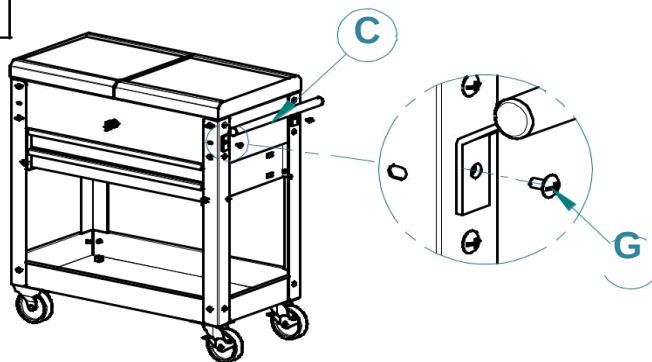

Handle can be attached on either side.

5

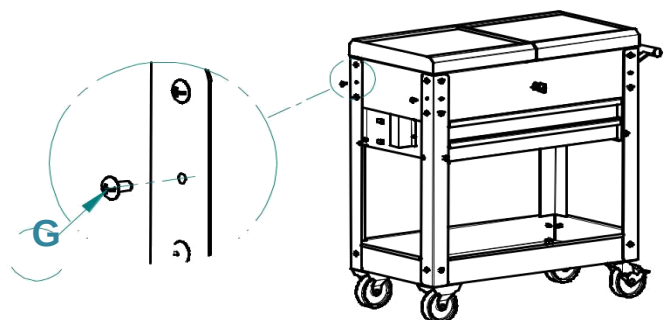

Includes 2 screws for spare parts