

User Guide

Receiver-Mount Dirt Bike Carrier

Aluminum Construction

400 lb. Capacity

555-87012

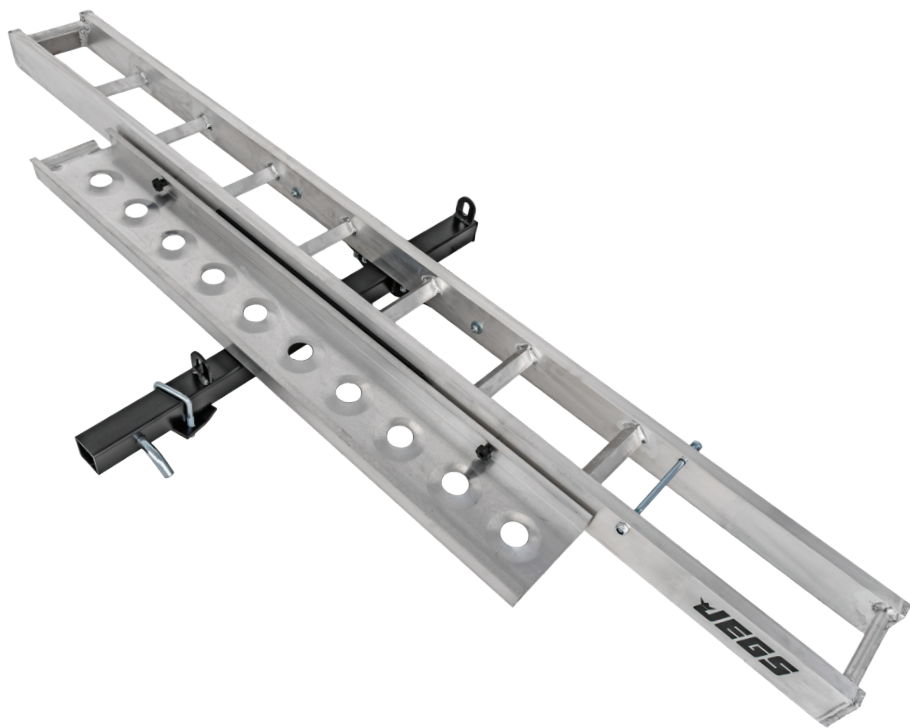


Table of Contents

<i>Read Before Assembly</i>	01	<i>Assembly</i>	04-05
<i>Parts List</i>	02	<i>Ramp Usage</i>	06
<i>Guidelines & Safety</i>	03	<i>Notes</i>	07
<i>Tools Required</i>	03		

Read Before Use

Thank you for your purchase of this JEGS Receiver Mount Dirt Bike Carrier. Please be sure to read this user guide to ensure proper use.

This system utilizes a 2 in. square receiver. Ensure that your vehicle is equipped with this prior to use.

If you have any issues, or if this carrier is damaged, please contact customer service at: 1.800.345.4545.

Return Information: *Once this carrier has been modified, it will not be accepted for return.*


WARNING

**READ AND UNDERSTAND
ALL INSTRUCTIONS.**

Failure to follow all instructions listed in this user guide may result in property damage, and/or serious injury.

SAVE THESE INSTRUCTIONS!

Parts List

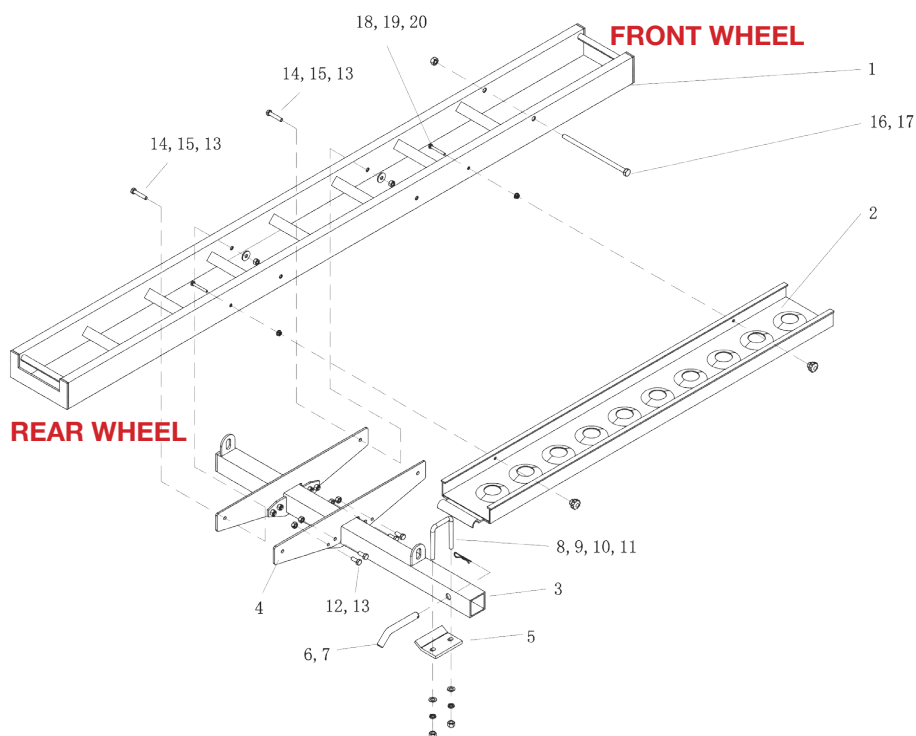

PART #	DESCRIPTION	QTY
1	Motorcycle Rack	1
2	Ramp	1
3	Hitch Bar	1
4	Support Bracket	2
5	Anti-Tilt Bracket	1
6	Hitch Pin	1
7	R-Pin	1
8	U-Bolt	1
9	Flat Washer (M10)	2
10	Lock Washer (M10)	2

PART #	DESCRIPTION	QTY
11	Nut (M10)	2
12	Bolt (M8x20mm)	8
13	Lock Nut (M8)	12
14	Bolt (M8x40mm)	4
15	Flat Washer (M8)	4
16	Bolt (M10x210mm)	1
17	Lock Nut (M10)	1
18	Bolt (M6x45mm)	2
19	Flange Nut (M6)	2
20	Finger Nut (M6)	2

Guidelines & Safety


- It is the user's responsibility to read and follow all instructions.
 - Keep this user guide with the product at all times and review before each use.
 - It is the responsibility of this product's owner to provide these instructions to any person that borrows or purchases the product.
 - Inspect the product before use to ensure it is assembled properly and all parts are in safe working order and free of defects.
 - Do not modify this product in any way.
 - When using this carrier, employ common sense and practice general safety measures.
 - Parts and/or instructions are subject to change without notice.
 - Never exceed vehicle trailer hitch tongue weight capacity or carrying capacity of your vehicle.
 - Some vehicles may require air shocks of modifications to the vehicle's suspension when using this carrier.
 - Check your owner's manual for vehicle hauling capabilities and weight ratings.
 - Never exceed the carrier's 400 lb. max rated weight capacity.
 - Not recommended for rear-mounted scooters over 300 lbs.
 - Not recommended for use on tow-behind trailers, including 5th wheel and camping trailers, motorhomes or RVs.
 - Not recommend for use with hitch adapters or extensions.
 - Will not work with Class II or smaller receivers.
 - Carrier can be assembled by one person; we recommend that you have a helper.
 - Push the motorcycle up the carrier with a helper; never ride a motorcycle onto the carrier!
 - Store the carrier in a secure place, away from children, when not in use.
 - Also suitable for use with eBikes and fat tires bicycles.
-

Tools Required


- 10mm Wrench
- 13mm Wrench
- 17mm Wrench

Assembly

1. Install the support brackets (4) onto the hitch bar (3) on the outside of the welded brackets using the eight M8x20 bolts (12). Leave the bolts hand-tight. Fig. 1

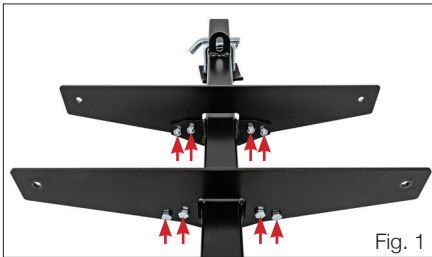


2. Place the motorcycle rack (1) between the support brackets, noting the ramp mounting holes on the rack are facing the receiver. Install the four M8x40 bolts (14), washers (15), and nuts (13). Securely tighten all twelve support bracket bolts. Fig. 2

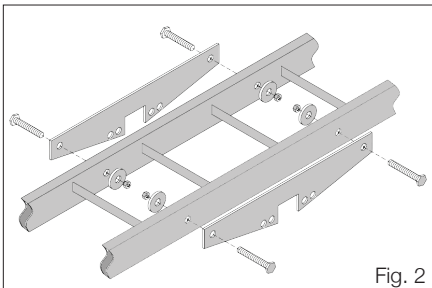

3. Slide the anti-tilt bracket (5) over the hitch bar with the flat side of the bracket toward the vehicle. Slide the rack into the trailer hitch, install the hitch pin (6), then tighten the anti-tilt bolts evenly. They will pinch the bracket on the collar of the hitch, preventing excessive movement of the rack. Fig. 3




4. The ramp (2) stores on the motorcycle rack with the two supplied bolt (18), flanged nut (19), and finger nuts (20). Fig. 4

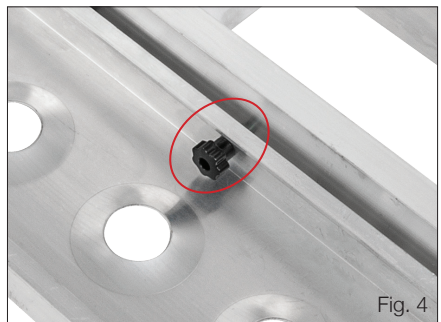

Assembly (Contd)

5. The optional small wheel adapter bolt [M10 bolt (16) and M10 nut (17)] can be inserted into the front of the motorcycle rack to make the front wheel gap smaller. Fig. 5

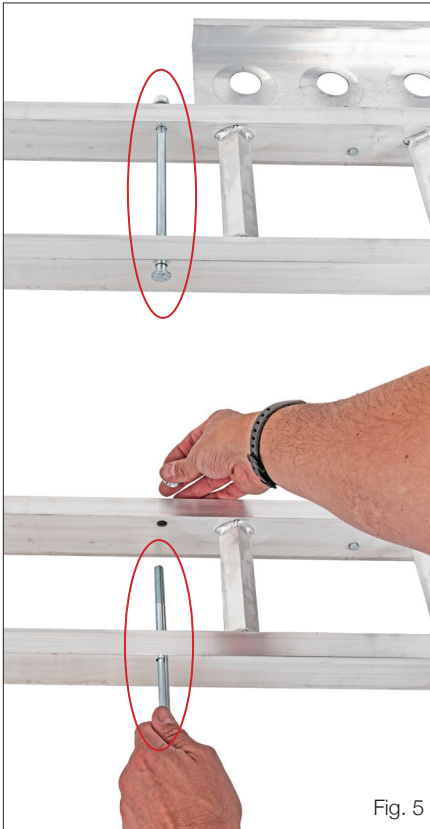


6. Secure the motorcycle to the rack with tie down straps (sold separately). Use two ratchet straps attached to the handlebars, two straps attached to the rear frame of the bike, and two wheel ties (sold separately). Fig. 6 & 7



Ramp Usage

1. To use the ramp to mount, or dismount, your motorcycle you must first remove it from the carrier. Unscrew the two finger nuts (20) securing the ramp (2) to the motorcycle rack. Fig. 8

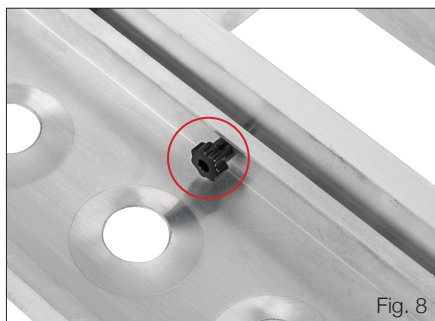

2. Once removed, place the half-round channel at the one end of the ramp onto the round bar at either end of the rack. Fig. 9
3. Once you have mounted, or dismounted, your motorcycle, slide the ramp over the two bolt (18) on the ramp and reinstall the finger nuts. Fig. 10



[illegible]

Return Information: *Once this carrier has been modified, it will not be accepted for return.*