




CARGO CARRIER HITCH MOUNTED STEEL TRAY

Item No. 99603

CONSUMER: Keep Instructions and read before use

ASSEMBLY INSTRUCTIONS


FIGURE A

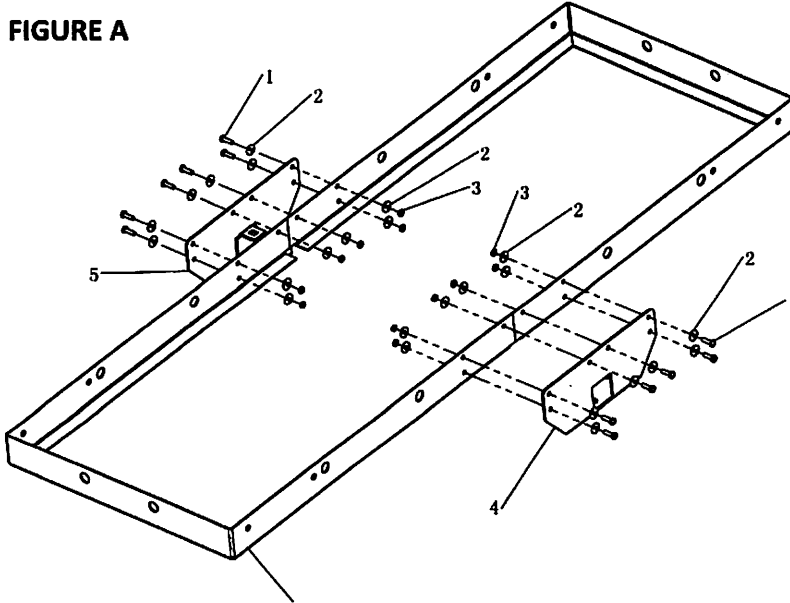

Parts No.	Description	QTY
1	Hex Bolt 1/4" x 3/4"	12
2	Flat Washer 1/4"	24
3	Hex Lock Nut 1/4"	12
4	End Plate w/Shank Hole	1
5	End Plate	1
6	Basket Frame	2
7	3/8" x 3" Carriage Bolt	3
8	3/8" Flat Washer	3
9	3/8" Hex Nut	3
10	Center Plate	1
11	Shank	1

1. Align both halves of the basket on the ground and attach each end plate to the outside of basket as shown in FIGURE A and fasten loosely with (12) 1/4" bolts, (24) 1/4" flat washers and (12) 1/4" hex nuts.

FIGURE B

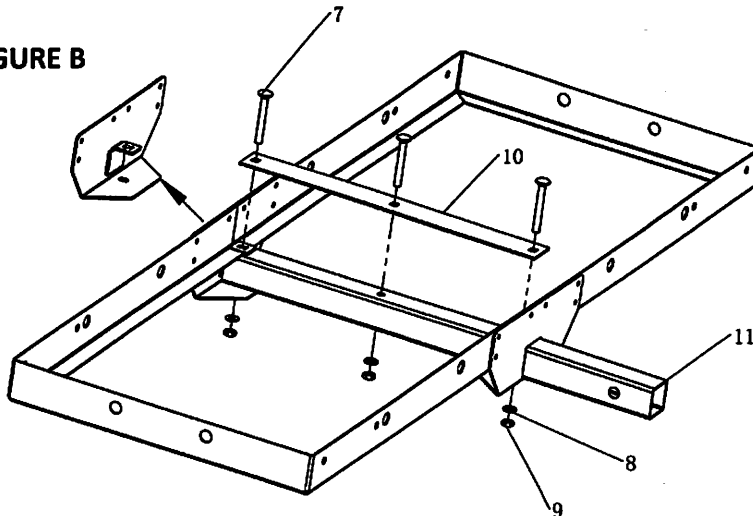

2. Slide 2" shank through shank hole and align holes in end plates. Align center plate on the inside of basket with holes in shank and loosely attach with (3) 3/8" carriage bolts, (3) 3/8" flat washers and (3) 3/8" nuts.
3. Tighten all hardware. Tighten all 1/4" hex bolts to 6 ft-lb and all 3/8" bolts to 24 ft-lb.

DO NOT EXCEED


500 LB LOAD CAPACITY – VEHICLE OR HITCH MFR'S WEIGHT LIMIT



CARGO CARRIER HITCH MOUNTED STEEL TRAY

Item No. 99603

Page 2

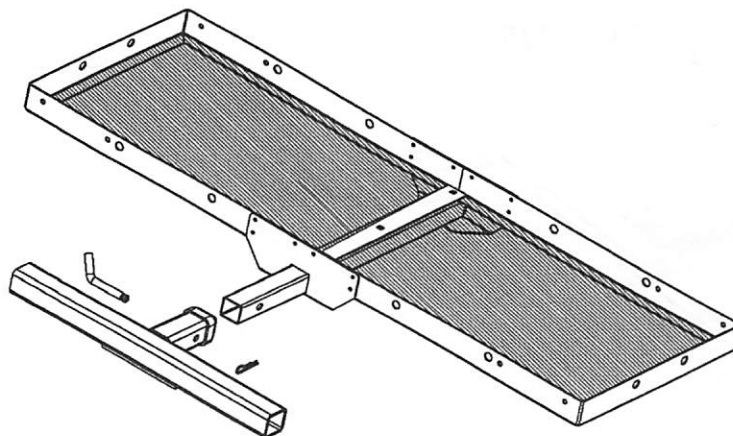


WARNING




- DO NOT transport people, animals or flammable liquids.
- If license plate is blocked by load or Hitch Mounted Cargo Carrier, you must relocate using existing holes.
- If load or Hitch Mounted Cargo Carrier blocks or impairs visibility of tail lights or turn signals, use additional light kit.
- If Hitch Mounted Cargo Carrier or the contents being transported is in line with exhaust outlet, an exhaust tip must be used to redirect the exhaust flow away from the cargo platform and contents.

CAUTION

- The Hitch Mounted Cargo Carrier load rating is the LOWEST of the following:
 - Hitch Mounted Cargo Carrier rating – 500 lbs
 - Hitch tongue rating
 - Vehicle manufacturer tongue rating
- The center of gravity of load must be positioned within the middle third of platform

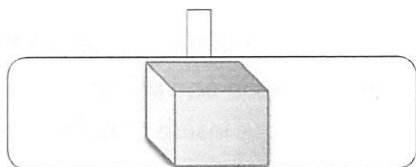

CORRECT

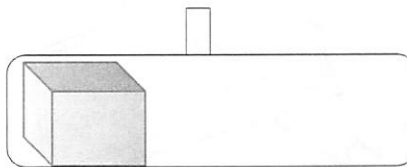

INCORRECT


- Do not lubricate threads
- Bolt failure may occur due to over tightening
- Securely fasten load to Hitch Mounted Cargo Carrier
- Check security of load, fasteners, pin & clip at all fuel and rest stops
- Severe bumps can damage your towing vehicle, hitch and Hitch Mounted Cargo Carrier. Drive slowly per road conditions
- Stop and inspect your Hitch Mounted Cargo Carrier if it strikes the road. Correct any problems before continuing travels.
- Do not cut, drill, weld or modify this product
- Do not carry loads wider than your vehicle



CARGO CARRIER HITCH MOUNTED STEEL TRAY

Item No. 99603

Page 3



PART 1. 1/4" x 3/4" HEX
BOLT
(12)



PART 2. 1/4" FLAT WASHER
(24)



PART 3. 1/4" HEX LOCK NUT
(12)




PART 7. 3/8" x 3" CARRIAGE BOLT
(3)



PART 8. 3/8" FLAT WASHER
(3)



PART 9. 3/8" HEX LOCK NUT
(3)

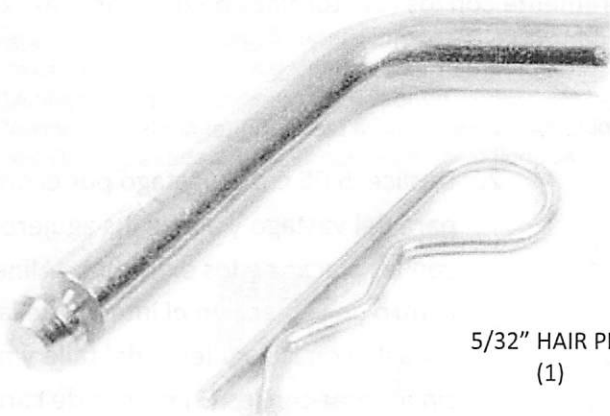

5/8" HITCH PIN
(1)

5/32" HAIR PIN
(1)