

User Guide

Hose Clamp Pliers

555-95729



Table of Contents

<i>Read Before Assembly</i>	01	<i>Instructions</i>	04
<i>Contents</i>	02	<i>Maintenance</i>	05
<i>Specifications</i>	03	<i>Notes</i>	05

Read Before Installation

Thank you for your purchase of this JEGS Hose Clamp Plier Kit. Please read the following steps below before beginning installation.

- Read instructions completely before using pliers.
- **ONLY** use the pliers for their intended purpose, which is for stopping the flow of fluids in flexible hoses, brake hoses, vacuum and other pipes.
 - **DO NOT** use the pliers on rigid or reinforced pipes, high-pressure hoses, or pipes that are beyond the capacity of the pliers. This could result in damage to the pliers, and injury to the user.
- **DO NOT** allow children or those unfamiliar with this product to use it.
- **DO NOT** use while under the influence of alcohol, drugs, or any medication that negatively affects your judgment or reflexes.
- Keep children and bystanders away during use.
- For best results, keep the kit clean and dry. Remove any fluid, oil, or grease before and after work.
- **ALWAYS** use personal protective equipment (PPE) suitable to your task.
 - Always wear ANSI approved eye and hand protection while using this product. Nonslip footwear is also highly recommended.

- **DO NOT** use the pliers near any moving parts or machinery that could cause injury if the pliers slip or fail.
- Maintain this product. Check for misalignment, binding, wear, or other damage before use.
 - If any damage is detected, **DO NOT USE** the tool. If the pliers become damaged or worn during use, immediately stop using them and replace them with a new pair.

If you have any issues, or if this hose clamp plier kit is damaged, please contact customer service at: 1.800.345.4545.

Return Information: *Once any of the pliers have been modified, this kit will not be accepted for return.*

Contents



LETTER	PART	LETTER	PART
A	Flexible Hose Clamp Pliers	E	Ribbon Hose Clamp Pliers
A-1	Flexible Connector Replacement	F	Ear Clamp Pliers
B	Cross-Slotted Jaw Pliers	G	Hose Removal Pliers
C	Swivel Jaw Hose Clamp Pliers	H	Philips screwdriver
D	Angle Hose Clamp Pliers	I	Hook Removal Hose


Specifications

PLIER TYPE	DIMENSIONS	STANDARD	METRIC
FLEXIBLE HOSE CLAMP PLIERS	Length	8.46 in.	21.5 cm.
	Opening	1.97 in.	5 cm.
	Line Length	24.02 in.	61 cm.
	Fitment	Spring Hose Clamps	
CROSS SLOTTED CLAMP PLIERS	Length	8.66 in.	22 cm.
	Opening	2.56 in.	6.5 cm.
	Fitment	Spring Hose Clamps	
SWIVEL JAW HOSE CLAMP PLIERS	Length	8.46 in.	21.5 cm.
	Opening	2.36 in.	6 cm.
	Fitment	Spring Hose Clamps	
ANGLED HOSE CLAMP PLIERS	Length	8.86 in.	22.5 cm.
	Opening	2.56 in.	6.5 cm.
	Angle	45°	
	Fitment	Spring Hose Clamps	
RIBBON HOSE CLAMP PLIERS	Length	8.27 in	21 cm.
	Opening	2.17 in.	5.5 cm.
	Fitment	Spring Hose Clamps	
EAR CLAMP PLIERS	Length	7.1 in.	18 cm.
	Opening	7.1 in.	18 cm.
	Fitment	Ear Clamps	
HOSE REMOVAL PLIERS	Length	7.87 in.	20 cm.
	Opening	1.38 in.	3.5 cm.
HOSE REMOVAL HOOK	Length	7.68 in.	19.5 cm.
	Fitment	Ear Clamps	


MATERIAL	AISI 1045 Steel
----------	-----------------

Instructions


1. Choose a hose clamp plier that is suitable for the size and position of your hose clamp.
2. Place the ends of the hose clamp securely into the plier's jaws, making sure that they are tightly attached.

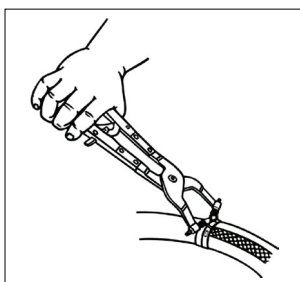


3. Apply appropriate force to the plier's handle to loosen the hose clamp. Keep pressing the locking mechanism until the clamp is loose enough to be disengaged from the hose.
 - Always exercise caution when working with hoses and clamps.

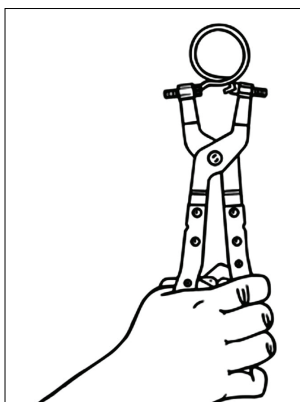

- Make sure that the clamp is fully disengaged before attempting to remove it, and avoid using excessive force that could damage the hose or connection point.
4. Use the Hose Removal Plier to remove the hose once the clamp is fully disengaged.

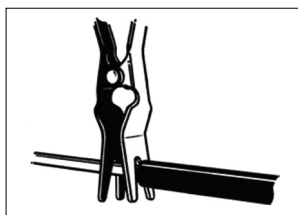

5. After cleaning the hose, position it back in place and reinstall the hose clamp in its original position. Press the locking mechanism again to securely fix the hose clamp in place.

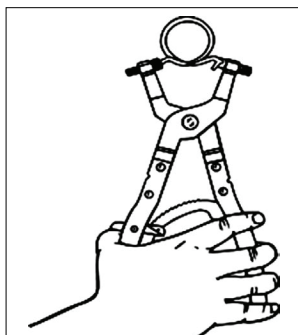

Maintenance

Notes

- Clean the tools with a soft damp cloth using a mild detergent or solution after use.
- Do not rinse them or use abrasive cleaners or caustic chemicals.
- For best results, lubricate the tools with high-quality anti-corrosive oil between uses.
- Check the parts of the tools periodically for any wear or damage.
- Repair or replace any problematic parts before further use.
- If the tools will not be used for an extended period of time, clean and lubricate them and store them in a cool dry place inaccessible to children.

[illegible]

If you have any issues, or if any components of this Hose Clamp Plier Kit are damaged, please contact customer service at: 1.800.345.4545.

Return Information: *Once any of the pliers have been modified, this kit will not be accepted for return.*



1-800-345-4545