

V Force Wiring Pin Outs**Part #****67035****AUDI**

<u>Year</u>	<u>Model</u>	<u>Engine</u>	<u>TPS Wire Color</u>	<u>TPS Location</u>	<u>MAF Wire Color</u>	<u>MAF Location</u>	<u>Footnotes</u>
1997-1999	A4	1.8 L	WHT/YEL	1	GREEN	A	(**)
2000-2003	A4	1.8 L	BRWN/GRN	1	GREEN	B	(**)
2004-2005	A4	1.8 L	BROWN	2	GREEN	C	(**)
2006	A4	1.8 TURBO	BROWN	2	GREEN	C	(**)
2006	A4	2.0 TURBO	BROWN	2	GREEN	C	(**)
2007-2009	A4	2.0 TURBO	BROWN	2	GRN/GREY	C	(**)
2010-2012	A4	2.0 TURBO	BROWN	2	BRWN/BLU	A	(**)
1996	A4	2.8 L	BLUE/BRWN	1	GREEN	A	(**)
1997-1999	A4	2.8 L	WHT/YEL	1	GREEN	A	(**)
2000-2001	A4	2.8 L	BRWN/GRN	1	GREEN	B	(**)
2002-2005	A4	3.0 L	BROWN	2	GREEN	B	(**)
2006	A4	3.0 L	BROWN	2	GREEN	C	(**)
1996-1997	A6	2.8 L	BLUE/BRWN	1	GREEN	A	(**)
1998-1999	A6	2.8 L	WHT/YEL	1	GREEN	A	(**)
2000-2004	A6	2.7 TURBO	BRN/GRN	2	GREEN	B	(**)
2000-2001	A6	2.8 L	YEL/BLU	2	GREEN	B	(**)
2002-2004	A6	3.0 L	YEL/BLU	2	GREEN	B	(**)
2000-2004	A6	4.2 L	YEL/BLU	2	GREEN	B	(**)
2005-2006	A6	4.2 L	YEL/BLU	2	GRN/RED	B	(**)
2007-2012	A6	4.2 L	YEL/BLU	2	GRN/VIOLET	B	(**)
2000-2002	S4	2.7 TURBO	YEL/BLU	2	GREEN	D	(**)
2004-2009	S4	4.2 L	YEL/BLU	2	GREEN	E	(**)
2002-2003	S6	4.2 L	YEL/BLU	2	GREEN	A	(**)
2000-2006	TT	1.8 L	GRY/BLU	2	GREEN	A	(**)

Footnotes**(**) = You are connecting to the Mass Air Flow Sensor****TPS LOCATION:**

1 = ON SIDE OF THROTTLE BODY, OPPOSITE THROTTLE LINKAGE

2 = ABOVE ACCELERATOR PEDAL

MAF LOCATION:

A = IN AIR INTAKE DUCT

B = INSIDE AIR CLEANER HOUSING

C = ON INTAKE MANIFOLD PLENUM

D = ATTACHED TO AIR CLEANER HOUSING

E = RIGHT REAR OF ENGINE COMPARTMENT

Optional 02 Sensor Signal connections

O2 Type	Wire Color
3 wire	Black
4 wire	Varies you need factory wiring diagram to verify O2 sensor output signal
5 wire	Varies you need factory wiring diagram to verify O2 sensor output signal

AP020 AP013 AP036 | Dash or Console 3M™ Adhesive Mounting Disc



AP020 Disc
(Ø 90 mm)

AP013 Disc
(Ø 80 mm)

AP036 Disc
(Ø 70 mm)

Package Contents:


- (1) Self-adhesive dash or console pedestal mounting disc
- (1) Alcohol cleaning pad

No Tools Required for installation.


***Note:** Adhesive disc is intended for semi-permanent installation and one time application. If disc needs to be removed, please see the removal instructions below.

Dash or Console Mounting Instructions


- Step 1. Choose a suitable location for disc (and pedestal) installation. **Do not place mount in or near an air bag deployment zone or where it will obstruct view of the road or hinder vehicle operation.**
- Step 2. Clean the dash or console surface area thoroughly with the included alcohol pad. Allow the area dry before applying the mounting disc.

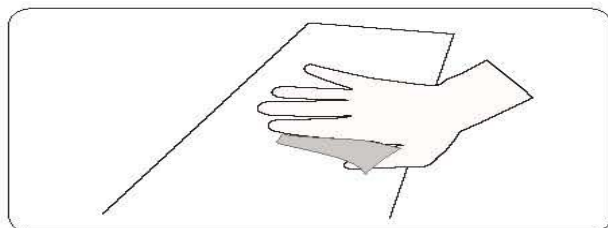

- Step 3. Remove the paper backing of the disc and place on the cleaned surface. Press the top of the disc down firmly to allow the adhesive to stick to the surface. Allow 24 hours for the adhesive to cure to the surface before applying any pressure.

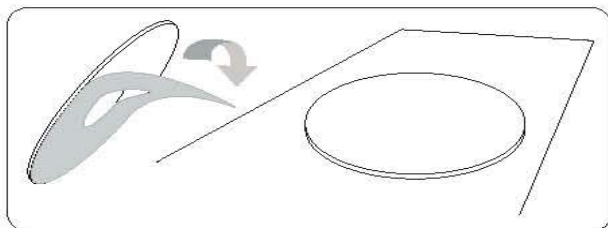


- Step 4. Place the suction cup of the pedestal (sold separately) firmly down on the center of the mounting disc and lower the securing lever.

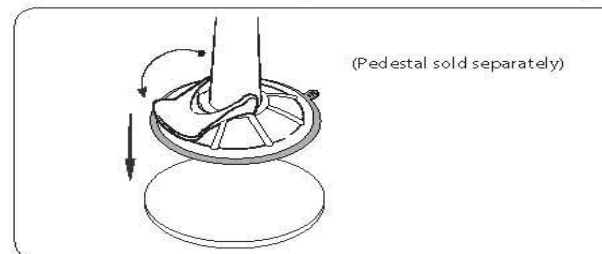

Disc Removal Instructions

- Step 1. Prepare the surface around the disc by applying a generous amount of rubbing alcohol or similar adhesive removal product to the area with a cotton swab. Let the liquid saturate the adhesive area for about a minute.
- Step 2. Take a long piece of dental floss in each hand and slowly work back and forth at the base of the adhesive disc. Gently use the dental floss to cut the adhesive from the dash or console until the black plastic disc is removed.

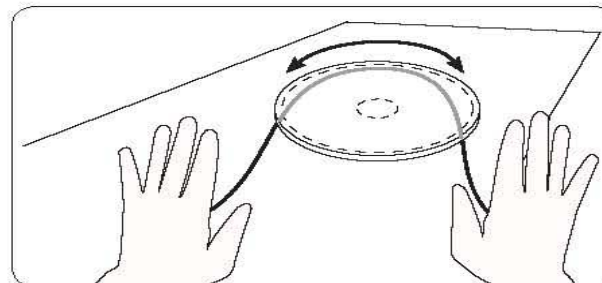



Step 3. If the sticky adhesive area breaks apart or does not come off completely, re-apply a small amount of alcohol (or adhesive removal liquid) and carefully lift off the remaining area by hand.

GN014-SBH | Mini Windshield Suction Swivel Mount



GN014-SBH
Windshield Mount with
Swivel Ball Head Assembly

Patent Pending

Package Contents:

- (1) GN014 - Mini windshield mount
- (1) Swivel ball head assembly with dual T-tab pattern adapter plate and tightening ring.

Compatible with:

- All Arkon dual T-tab pattern phone cradles and adapter plates
- Most Garmin 17mm ball connections. (See website for full list.)




Do not place mount in or near an air bag deployment zone or where it will obstruct view of the road.

Windshield Mounting


Step 1. Find a safe location on the interior of the vehicle's windshield to mount the pedestal. Firmly push the suction base (A) against the windshield and flip the base lever down (B) to the locked position. See diagram below.

Step 2. Adjust the angle of the pedestal arm by tightening the angle adjustment knob (C) at the base to the desired angle.

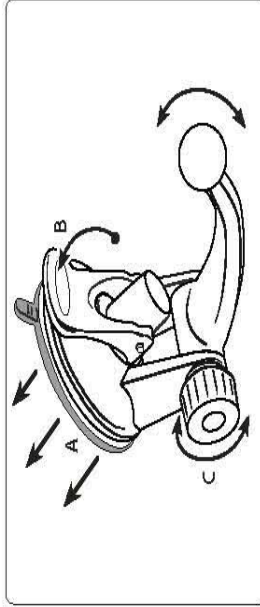


Swivel Ball Head Assembly Attachment

Step 1. Slip the tightening ring (D) over the pedestal ball. Snap the dual-T head adapter plate (E) on to the pedestal ball (F). Screw the tightening ring over the adapter plate until securely holding the plate. Adjust the angle as needed.

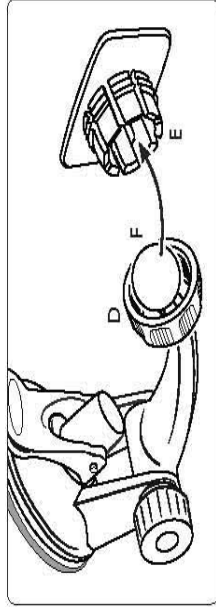


Attach Cradle or Device to Pedestal

Step 1. To attach your cradle or device (not included, sold separately) to the dual T-head, insert the dual T-tabs (G) into the dual T-slots (H) on the back of the cradle or device.

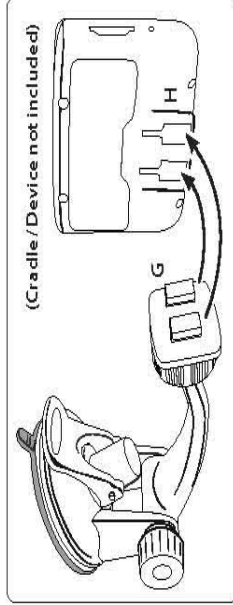

Attaching a Garmin Device to Pedestal

Step 1. Do not attach the swivel ball head assembly. Attach your Garmin device (not included, sold separately) to the ball head by firmly inserting the ball head (I) into the cavity (J) in the back of the device.

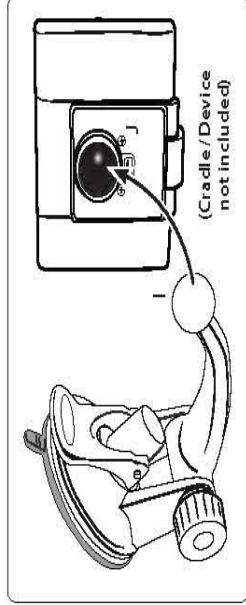

All brand names and product names are trademarks or registered trademarks of their respective owners.



Safety Precautions

Follow all manufacturer safety guidelines for operating your device. Failure to practice safe usage of GPS device while driving may result in damage, injury, or death. Arkon is not responsible for any damages caused to your car, your device, or yourself due to the installation or use of this pedestal mount.



The Mobile Mounting Specialists™

Consumer Hotline:

USA (800) 841-0884

INT'L (626) 254-9005

Monday - Friday 9am - 5pm, PST

www.arkon.com

Arcadia, CA 91006 USA

Designed in USA | Made in China and Taiwan

© Copyright 2009 Arkon Resources, Inc.