



MOROSO P/N 23850 IN-LINE SCREENED OIL FILTER 5/8"
NO. 10 FITTING
MOROSO P/N 23860 IN-LINE SCREENED OIL FILTER 3/4"
NO. 12 FITTING
MOROSO P/N 23870 IN-LINE SCREENED OIL FILTER 1/2"
NO. 8 FITTING

INSTALLATION INSTRUCTIONS

These high quality lightweight filters offer exceptional protection plus ease of maintenance. All are designed to be used with standard 37° fittings.


Install O'ring against machined ledge, and then install flanged filter.

The two ends (which utilize standard AN O'rings) are interchangeable. However, the end closest to the machined ledge should be used as the inlet side. Be sure all ends are carefully snugged to ensure against potential leaks.

Replacement screens are available from Moroso as P/N 97050, and will fit all filters.

PARTS LIST

- | | |
|---|---------------------------|
| 1 | O'RING |
| 1 | FILTER HOUSING IN-LINE |
| 2 | -10/-12 AN FITTING PLATED |
| 2 | O'RING, BUNA |
| 1 | FINGER SCREEN IN-LINE |

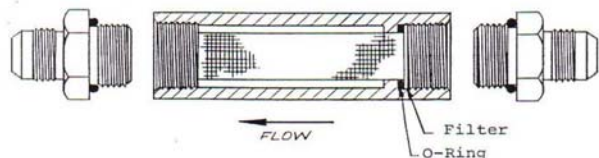

For Technical Assistance, Call Moroso's Tech Line at
(203) 458-0542, 458-0546 8:30am – 5:00pm Eastern Time

MOROSO PERFORMANCE PRODUCTS, INC
80 CARTER DR • GUILFORD, CT 06437
Phone: (203) 453-6571 • Fax: (203) 453-6906

VisitUsAtwww.moroso.com



MOROSO P/N 23850 IN-LINE SCREENED OIL FILTER 5/8"
NO. 10 FITTING
MOROSO P/N 23860 IN-LINE SCREENED OIL FILTER 3/4"
NO. 12 FITTING
MOROSO P/N 23870 IN-LINE SCREENED OIL FILTER 1/2"
NO. 8 FITTING

INSTALLATION INSTRUCTIONS

These high quality lightweight filters offer exceptional protection plus ease of maintenance. All are designed to be used with standard 37° fittings.


Install O'ring against machined ledge, and then install flanged filter.

The two ends (which utilize standard AN O'rings) are interchangeable. However, the end closest to the machined ledge should be used as the inlet side. Be sure all ends are carefully snugged to ensure against potential leaks.

Replacement screens are available from Moroso as P/N 97050, and will fit all filters.

PARTS LIST

- | | |
|---|---------------------------|
| 1 | O'RING |
| 1 | FILTER HOUSING IN-LINE |
| 2 | -10/-12 AN FITTING PLATED |
| 2 | O'RING, BUNA |
| 1 | FINGER SCREEN IN-LINE |

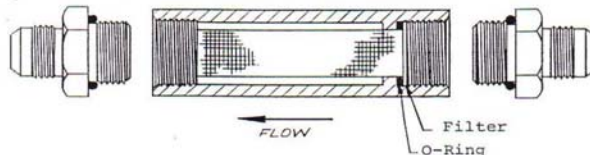

For Technical Assistance, Call Moroso's Tech Line at
(203) 458-0542, 458-0546 8:30am – 5:00pm Eastern Time

MOROSO PERFORMANCE PRODUCTS, INC
80 CARTER DR • GUILFORD, CT 06437
Phone: (203) 453-6571 • Fax: (203) 453-6906

VisitUsAtwww.moroso.com



MOROSO P/N 23850 IN-LINE SCREENED OIL FILTER 5/8"
NO. 10 FITTING
MOROSO P/N 23860 IN-LINE SCREENED OIL FILTER 3/4"
NO. 12 FITTING
MOROSO P/N 23870 IN-LINE SCREENED OIL FILTER 1/2"
NO. 8 FITTING

INSTALLATION INSTRUCTIONS

These high quality lightweight filters offer exceptional protection plus ease of maintenance. All are designed to be used with standard 37° fittings.


Install O'ring against machined ledge, and then install flanged filter.

The two ends (which utilize standard AN O'rings) are interchangeable. However, the end closest to the machined ledge should be used as the inlet side. Be sure all ends are carefully snugged to ensure against potential leaks.

Replacement screens are available from Moroso as P/N 97050, and will fit all filters.

PARTS LIST

- | | |
|---|---------------------------|
| 1 | O'RING |
| 1 | FILTER HOUSING IN-LINE |
| 2 | -10/-12 AN FITTING PLATED |
| 2 | O'RING, BUNA |
| 1 | FINGER SCREEN IN-LINE |

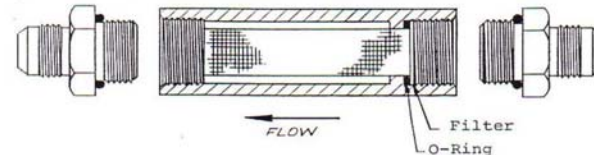

For Technical Assistance, Call Moroso's Tech Line at
(203) 458-0542, 458-0546 8:30am – 5:00pm Eastern Time

MOROSO PERFORMANCE PRODUCTS, INC
80 CARTER DR • GUILFORD, CT 06437
Phone: (203) 453-6571 • Fax: (203) 453-6906

VisitUsAtwww.moroso.com