



INSTALLATION INSTRUCTIONS


P/N 65232 & 65233 HIGH FLOW INLINE FUEL FILTERS

It is recommended that a thin coat of never seize type lubricant is applied to the threads before assembly. This will help keep the threads from galling when assembled.

NOTE: Do not overtighten clamp.

PARTS LIST

- | | |
|---|-----------------------|
| 1 | Threaded End Cap |
| 2 | O-Rings |
| 1 | Inline Filter Housing |
| 1 | Paper Filter Element |
| 1 | Spring |
| 1 | Clamp Mount |

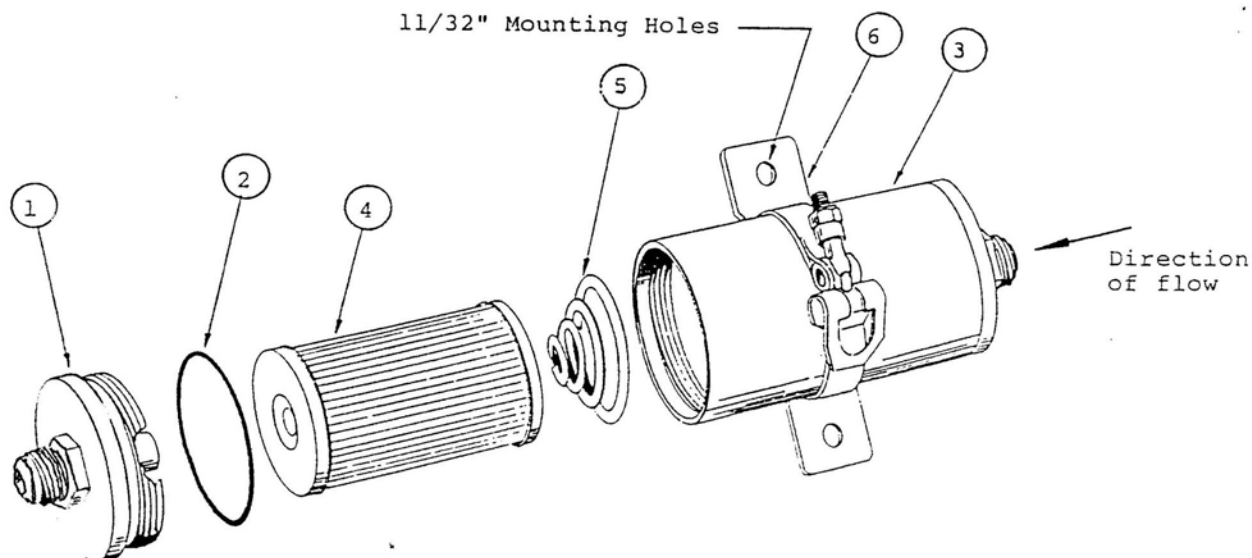

**For Technical Assistance, Call Moroso's Tech Line at
(203) 458-0542, 8:30am – 5:00pm Eastern Time**

MOROSO PERFORMANCE PRODUCTS, INC
80 CARTER DR • GUILFORD, CT 06437-2116
Phone: (203) 453-6571 • Fax: (203) 453-6906