




## **PUSH-PULL BATTERY DISCONNECT INSTALLATION INSTRUCTIONS P/N 74105, 74109, 74111**

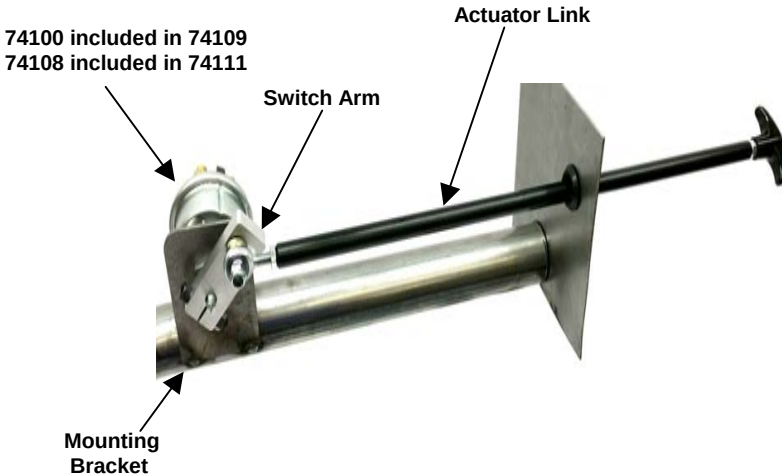

Refer to the diagram for component placement. Assemble the unit as shown by attaching a rod end to the actuator link, then align the mounting bracket to have the actuator link perpendicular to the rear valance panel. Check for binding of the rod end in this position and mark the brackets location on the chassis tubing. To insure a proper weld, cutting or grinding of the brackets may be required to attain as close a fit as possible. Tack weld the bracket to the marked positions on the tube. Realign the actuator link with the rear valance panel and mark the location for a thru hole for the link (it is suggested to install the grommet to protect the paint). Disassemble the unit and finish cutting the hole and welding the bracket to the tubing. Re-install the complete kit and check the actuator link length through the valance panel making sure it is long enough to operate the mechanism but not protruding an excess amount, shorten if necessary.

*For Technical Assistance, Call Moroso's Tech Line at  
(203) 458-0542, 458-0546 8:30am – 5:00pm Eastern Time*

MOROSO PERFORMANCE PRODUCTS, INC  
80 CARTER DR • GUILFORD, CT 06437  
Phone: (203) 453-6571 • Fax: (203) 453-6906