



2501 Ludelle Street
Fort Worth, Texas 76105
817-244-6212 phone
817-244-4024 fax
800-423-9696 Tech

E-Mail: painless@painlessperformance.com
Web: www.painlessperformance.com

86000

1966-1977 Bronco Glove Box

The glove box you have purchased will allow glove box mounting Painless harness part number using a weatherproof fuse block. This glove box has all the necessary mounting holes pre-cut to allow for easy fuse block mounting and glove box installation.


FUSE BLOCK MOUNTING

- Using the 4 large Philips head screws, supplied with the fuse block mount the main fuse block into the side of the glove box. The screws will be inserted through the inside of the glove box and into the fuse block. The fuse block must be positioned with the 2 main lugs towards the back of the glove box. See the **FUSE BLOCK MOUNTING** photo for mounted fuse block reference.

- If the fuse block is not positioned, as shown in the photo to the right, the wires leaving the fuse block could interfere with the dash mounted speaker. This is only important if the fuse block you are using has the lugs seen in the picture.

- The fuse block cover can be secured to the glove box by running a fuse block mounting screw through the fuse block cover mounting hole, then through the glove box, and then into the fuse block. Some may opt to just cut the fuse block cover mounting tab altogether to keep the cover out of the way when it is off.



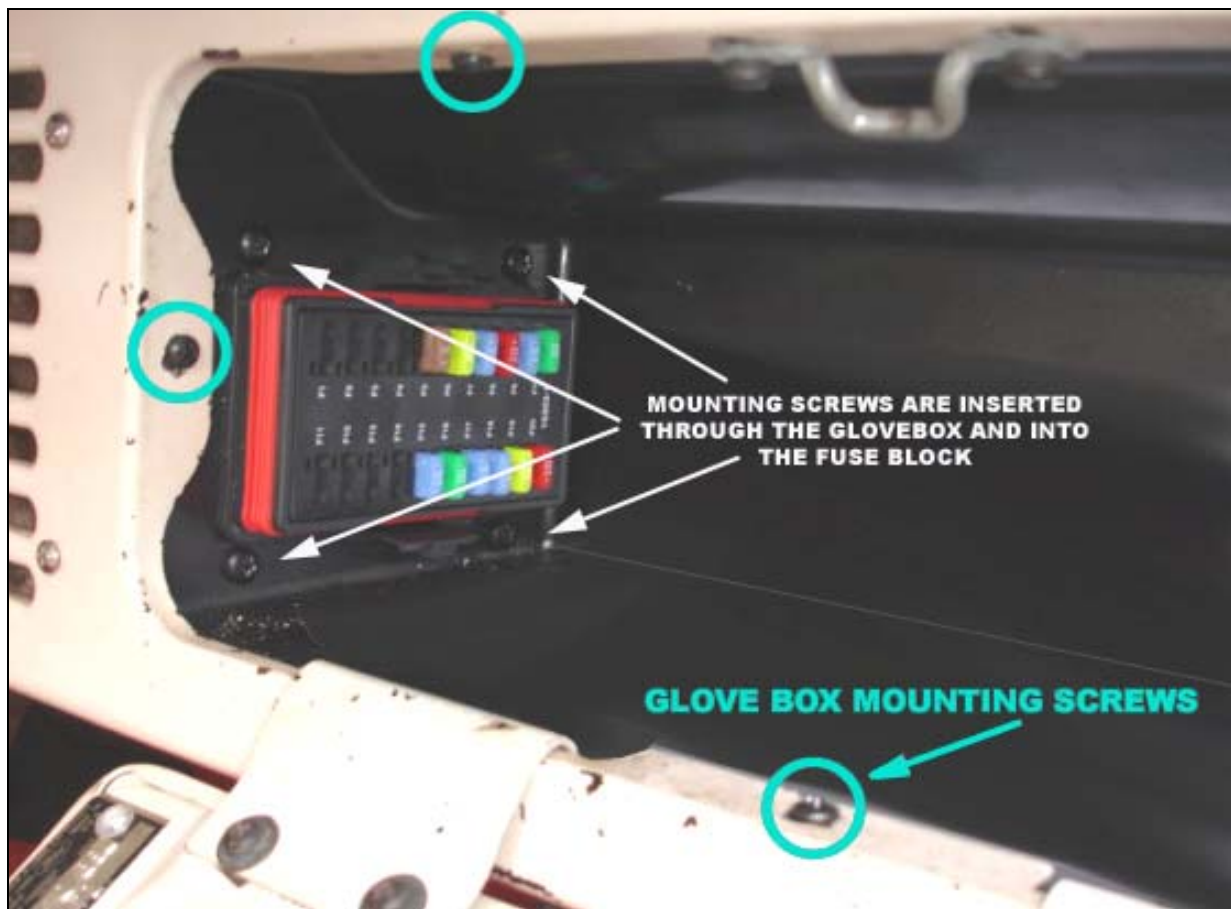

FUSE BLOCK MOUNTING


GLOVE BOX MOUNTING

After the fuse block has been mounted in the glove box, the glove box can now be installed onto the dash.



U NUT

- “U” nuts, see photo, have been provided to allow easy mounting of the glove box. Install these nuts over the center of the mounting holes and with the flat side of the nut on the inside of the box. The photo of the U nut shows the side that should be on the outside of the glove box. The illustration on the next page shows the U nut installation.
- Install the glove box over the mounting points of the dash. Notice the mounting points, or metal “tabs”, of the dash inside the glove box in the **FUSE BLOCK MOUNTING** photo. (This photo shows 3 of the 5 mounting screws.)
- Using the 5 small black Philips head screws from the parts kit, install the glove box. The glove box mounting screws need to be inserted through the metal tabs of the dash and then into the “U” nut on the Glove box. Loosely install all 5 screws before final tightening.

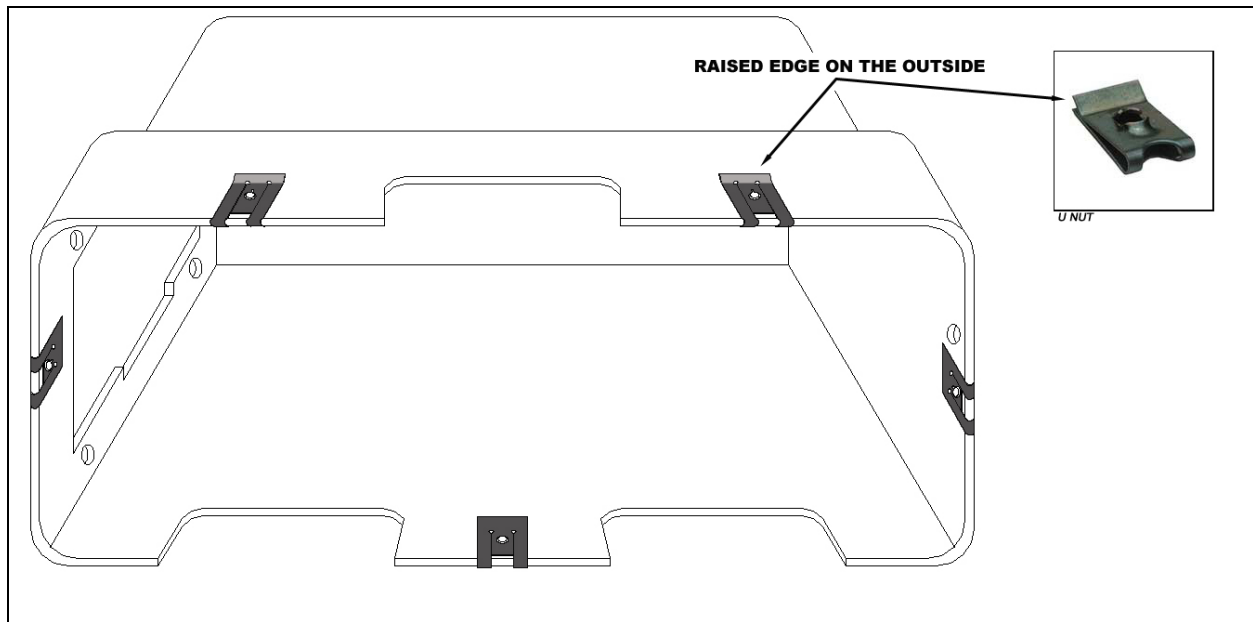

Painless Performance Limited Warranty and Return Policy

Chassis harnesses, fuel injection harnesses and Striker ColdShot are covered under a lifetime warranty. All other products manufactured and/or sold by Painless Performance are warranted to the original purchaser to be free from defects in material and workmanship under normal use. Painless Performance will repair or replace defective products without charge during the first 12 months from the purchase date. No products will be considered for warranty without a copy of the purchase receipt showing the sellers name, address and date of purchase. You must return the product to the dealer you purchased it from to initiate warranty procedures.

Copyright © 2008 by Perfect Performance Products, LLC