

WIDE 5 STARLITE 55XD LUG-DRIVE HUBS

Wilwood's Starlite Wide 5 "bubble" hub has been the standard in short track racing for over 40 years. It is the preferred foundation when building your race car's brakes. The **Starlite 55XD** Lug-Drive hub combines three Wilwood innovations to create a strong, light racing hub for the most demanding race tracks.

The Starlite 55 series is an evolution of Wilwood's original lightweight Starlite II hub which quickly became a benchmark. With its five-bolt drive flange and Snap-Cap, The Starlite 55 is one of the strongest, lightest Wide 5 hubs, and the **55XD** is lighter still.

The **Starlite 55XD** version reduces weight with just five rotor mount bolts at the hub's reinforced center, which also reduces brake torque loading to the hub body. A lightweight forged aluminum adapter plate bolts to the hub.


Wilwood's Lug-Drive dynamic floating rotor mount is a simpler, lighter system eliminating rotor bolts, T-nuts, bobbins, and safety wire. Drag and road race cars have used Wilwood's Lug-Drive system for years, and more than a season of extensive testing has been done on top circle track cars.

Starlite 55XD rear hubs use our five-bolt axle drive flange instead of the traditional eight-bolt design. This eliminates the weight of three steel bolts and the reinforced bosses they screw into.

Starlite 55XD front hubs eliminate all the bolts and bosses with the Snap-Cap. A lightweight fiber-reinforced composite plastic cap snaps into place to keep out dirt.



Starlite 55XD Lug-Drive
Front Hub with Snap Cap
P/N [270-17462C](#)

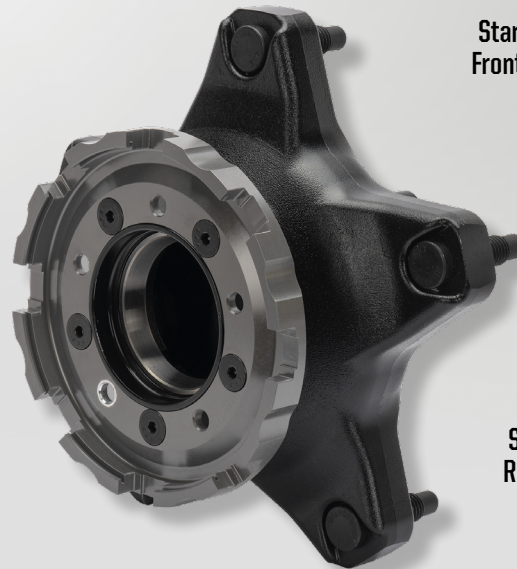

Starlite 55XD Lug-Drive
Rear Hub (inboard view)
P/N [270-17461C](#)




ORDERING INFORMATION: PH: 805.388.1188 • FAX: 805.388.4938 • wilwood.com • info@wilwood.com

HUB PART NUMBER	DESCRIPTION	AXLE	STUDS	FINISH
270-17461C	STARLITE 55XD with Lug-Drive Adapter	Rear	Coarse	Black E-Coat
270-17462C	STARLITE 55XD with Lug-Drive Adapter	Front	Coarse	Black E-Coat

ROTOR PART NUMBER	DESCRIPTION	MOUNTING	SIZE	MATERIAL
160-16923	GT Slotted, 40 Straight Vane, Symmetrical Rotor	Lug-Drive	11.75" x .81"	Spec37 Iron Alloy
160-16924	GT Slotted, 48 Curved Vane, Right Side Rotor	Lug-Drive	11.75" x 1.25"	Spec37 Iron Alloy
160-16925	GT Slotted, 48 Curved Vane, Left Side Rotor	Lug-Drive	11.75" x 1.25"	Spec37 Iron Alloy



Typical Wide 5 Configuration (Lug-Drive Dynamic Mount Rotor)

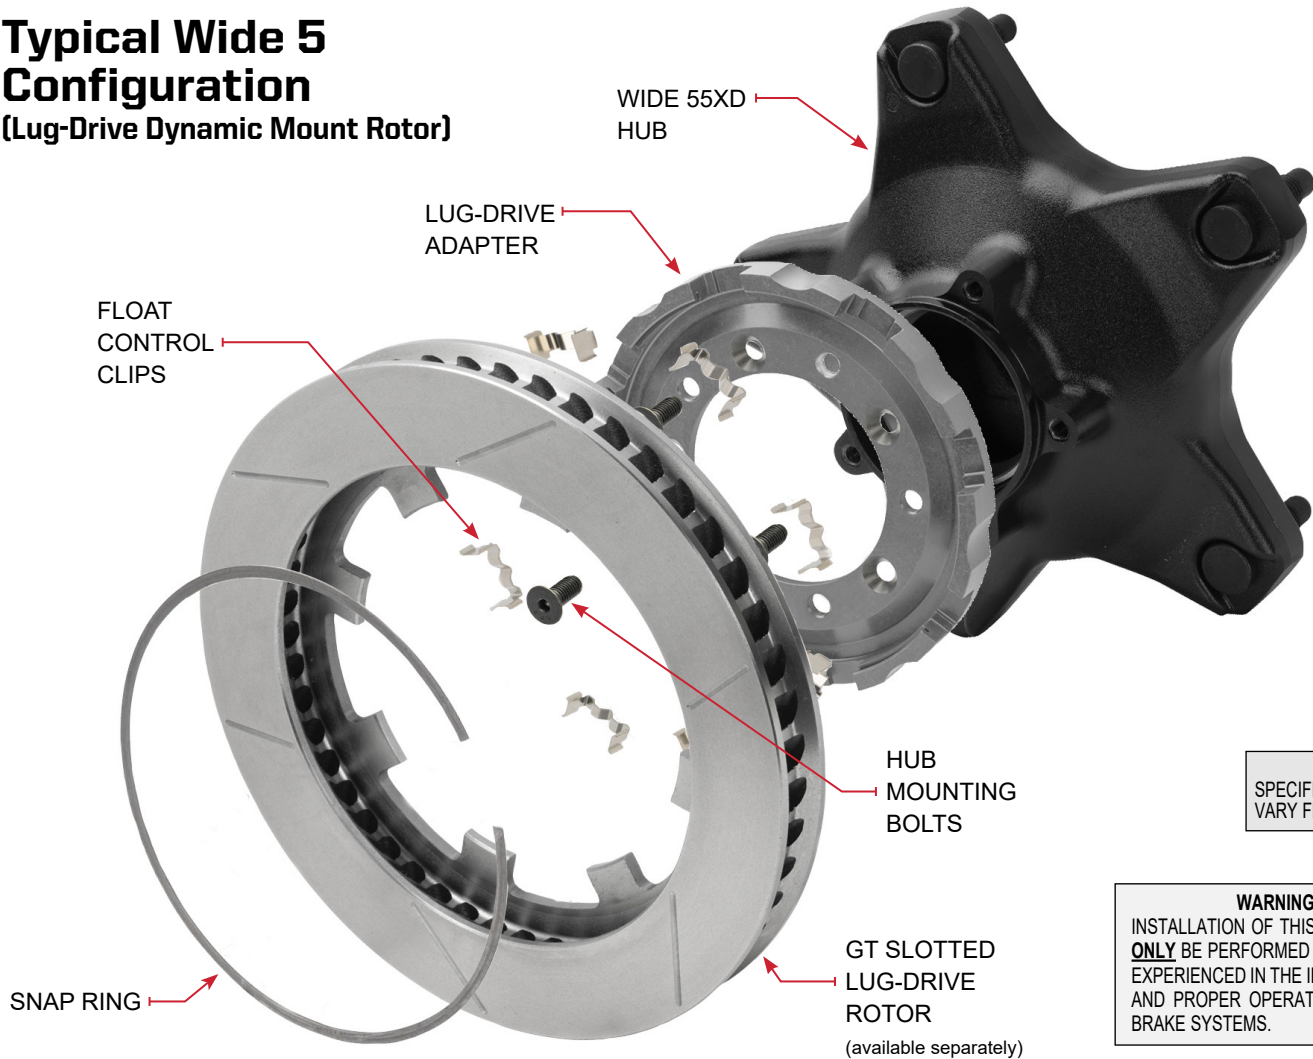

NOTE
SPECIFIC PARTS MAY
VARY FROM DIAGRAM

WARNING
INSTALLATION OF THIS KIT SHOULD
ONLY BE PERFORMED BY PERSONS
EXPERIENCED IN THE INSTALLATION
AND PROPER OPERATION OF DISC
BRAKE SYSTEMS.

Available Accessories:



ORDERING INFORMATION: PH: 805.388.1188 • FAX: 805.388.4938 • wilwood.com • info@wilwood.com

PART NUMBER	DESCRIPTION	AXLE	PART NUMBER	DESCRIPTION	AXLE
270-13213	Starlite 55 5-bolt Drive Flange with Oil Seal	Rear	270-9498	Starlite 55 5-bolt Dust Cap	Front
270-6733	Starlite 55 5-bolt Drive Flange	Rear	270-6913	Starlite 55 Press-in Snap Cap	Front
270-16183	Starlite 55 5-bolt Camber Drive Flange 2-Deg	Rear	300-12561	Lug-Drive Rotor Mounting Snap Ring Kit	Both