



Race-Light Single 2.5lb Bottle Horizontal Mounting Bracket

PART NUMBERS: 60S-32037, 60S-32037-T

ASSEMBLY INSTRUCTIONS

The Flo Supply Race-Light bottle mounting bracket is designed to provide a light weight and rigid mounting option for a 2.5lb CO2 aluminum bottle. If you need any assistance during installation or if you have questions about this bottle mounting bracket, call our Tech Help Line at (254) 848-4300.

Tools Needed for Assembly:

- 3/16" Allen Wrench
- Loctite



Installation Tip:

Red Loctite is recommended on all threaded fasteners.



Step 1:

Install the 6.25" long support bar between the upper and lower main bracket by threading the supplied 5/16-18 x 1/2" button head cap screw through the top center hole into the support bar.

IMPORTANT: All appropriate safety equipment (gloves, tools etc.) must be used during the installation of this product(s).

Nitro Dave's LLC accepts NO responsibility for injuries or damages resulting during and/or from the installation of any product(s). All products are intended for off-road use only.


WWW.FLOSUPPLY.COM/PAGES/INSTALLATION-GUIDES



Race-Light Single 2.5lb Bottle Horizontal Mounting Bracket

PART NUMBERS: 60S-32037, 60S-32037-T

ASSEMBLY INSTRUCTIONS

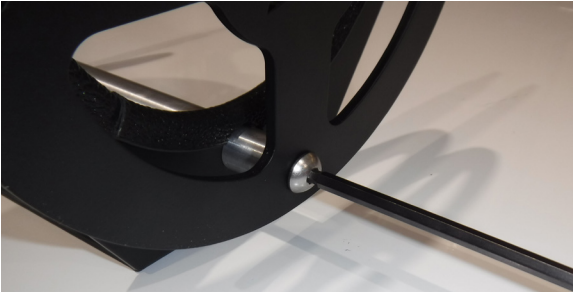

Step 2:

Attach the bottom plate by placing the supplied 3/4" long spacer between the plate and main bracket, then thread the supplied 5/16 x 18 x 1-1/2" button head cap screw through the bottom plate, spacer, main bracket and into the 6.25" long support bar.



Step 3:

Using two supplied 5/16-18 x 1/2" button head cap screws, install the threaded 3/4" long spacer between the main bracket and bottom plate in the front mounting hole.



Step 4:

On the left and right side holes of the bracket, place a 3/4" long spacer between the bottom plate and main bracket. Insert a supplied 5/16-18 x 1-1/2" button head cap screw, from the bottom of the bottom plate through the spacer and main bracket.



Step 5:

On each side of the main bracket, slide the 8.75" or 9.25" (depending on bottle height) long support bars through the larger diameter holes, then thread them on the button head cap screws at the bottom of the main bracket.

IMPORTANT: All appropriate safety equipment (gloves, tools etc.) must be used during the installation of this product(s).

Nitro Dave's LLC accepts NO responsibility for injuries or damages resulting during and/or from the installation of any product(s). All products are intended for off-road use only.

WWW.FLOSUPPLY.COM/PAGES/INSTALLATION-GUIDES

FLO SUPPLY | 305 SOUTH 28TH STREET | WACO, TX 76710 | P: 254-848-4300 | WWW.FLOSUPPLY.COM



Race-Light Single 2.5lb Bottle Horizontal Mounting Bracket

PART NUMBERS: 60S-32037, 60S-32037-T

ASSEMBLY INSTRUCTIONS



Step 6:

Apply red Loctite to only one end of the supplied 5/16-18 x 1" long studs.



Step 7:

Thread the end with Loctite into the two long support bars.



Step 8:

Place the Flo Supply 2.5lb CO2 Bottle in the Race-Light bracket.

IMPORTANT: All appropriate safety equipment (gloves, tools etc.) must be used during the installation of this product(s).

Nitro Dave's LLC accepts NO responsibility for injuries or damages resulting during and/or from the installation of any product(s). All products are intended for off-road use only.

WWW.FLOSUPPLY.COM/PAGES/INSTALLATION-GUIDES

FLO SUPPLY | 305 SOUTH 28TH STREET | WACO, TX 76710 | P: 254-848-4300 | WWW.FLOSUPPLY.COM



Race-Light Single 2.5lb Bottle Horizontal Mounting Bracket

PART NUMBERS: 60S-32037, 60S-32037-T

ASSEMBLY INSTRUCTIONS



Step 9:

Position the bottle neck support so that it contours the front of the nitrous bottle neck and slides down the rod studs.



Step 10:

Install the screw knobs on to the studs.



Conclusion:

You have finished the Race-Light bracket assembly. Now bolt it into the desired location.

IMPORTANT: All appropriate safety equipment (gloves, tools etc.) must be used during the installation of this product(s).

Nitro Dave's LLC accepts NO responsibility for injuries or damages resulting during and/or from the installation of any product(s). All products are intended for off-road use only.

WWW.FLOSUPPLY.COM/PAGES/INSTALLATION-GUIDES

FLO SUPPLY | 305 SOUTH 28TH STREET | WACO, TX 76710 | P: 254-848-4300 | WWW.FLOSUPPLY.COM



Race-Light Single 2.5lb Bottle Horizontal Mounting Bracket

PART NUMBERS: 60S-32037, 60S-32037-T

INSTALLATION INSTRUCTIONS

Additional Tools Needed for Surface Installation:

- Drill
- Drill Bit
- Wrench
- Ratchet
- Socket

*These are the tools required for installation of this bracket. You will need to specify the hardware to mount the bracket in your vehicle. The Race-Light bracket is designed for 5/16" diameter hardware.



Step 9:

Place your bottle in the bracket then place it in the desired location.



Step 10:

Mark the location on the car panel.

IMPORTANT: All appropriate safety equipment (gloves, tools etc.) must be used during the installation of this product(s).

Nitro Dave's LLC accepts NO responsibility for injuries or damages resulting during and/or from the installation of any product(s). All products are intended for off-road use only.

WWW.FLOSUPPLY.COM/PAGES/INSTALLATION-GUIDES



Race-Light Single 2.5lb Bottle Horizontal Mounting Bracket


PART NUMBERS: 60S-32037, 60S-32037-T

INSTALLATION INSTRUCTIONS



Step 11:

Check under the area you are drilling to ensure it is clear of any electrical or fuel systems components. If it is clear, use a center punch to mark the center of your mark, then drill the correct hole size for the hardware you are using.

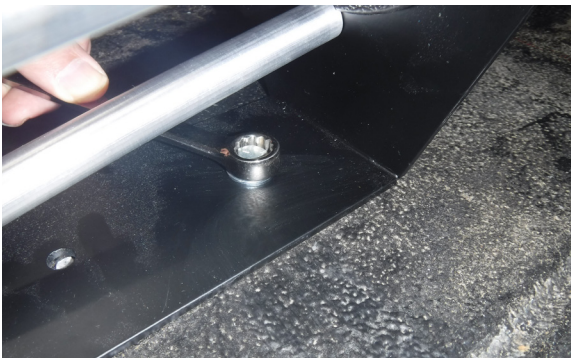

Step 12:

Remove the bottle from the mounting bracket, then fasten the bracket in place.



Step 13:

Place the bottle back in the bracket in the correct position.

IMPORTANT: All appropriate safety equipment (gloves, tools etc.) must be used during the installation of this product(s).

Nitro Dave's LLC accepts NO responsibility for injuries or damages resulting during and/or from the installation of any product(s). All products are intended for off-road use only.

WWW.FLOSUPPLY.COM/PAGES/INSTALLATION-GUIDES


FLO SUPPLY | 305 SOUTH 28TH STREET | WACO, TX 76710 | P: 254-848-4300 | WWW.FLOSUPPLY.COM



Race-Light Single 2.5lb Bottle Horizontal Mounting Bracket

PART NUMBERS: 60S-32037, 60S-32037-T

INSTALLATION INSTRUCTIONS

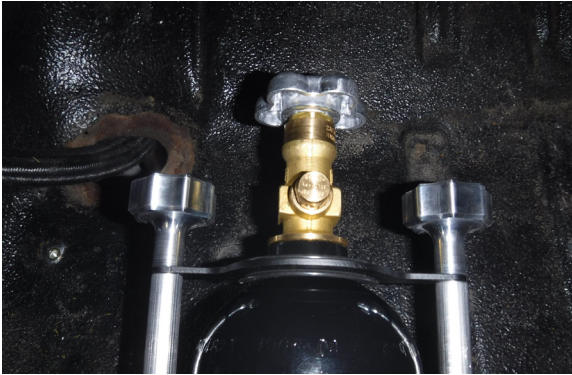

Step 14:

Place the neck bracket over the threaded studs at the top of each side bar with the loop in the bracket toward the front of the bottle. Screw the knobs on to the studs.



Conclusion:

You have finished the bottle bracket installation.

IMPORTANT: All appropriate safety equipment (gloves, tools etc.) must be used during the installation of this product(s).

Nitro Dave's LLC accepts NO responsibility for injuries or damages resulting during and/or from the installation of any product(s). All products are intended for off-road use only.

WWW.FLOSUPPLY.COM/PAGES/INSTALLATION-GUIDES

FLO SUPPLY | 305 SOUTH 28TH STREET | WACO, TX 76710 | P: 254-848-4300 | WWW.FLOSUPPLY.COM