



# Specifications

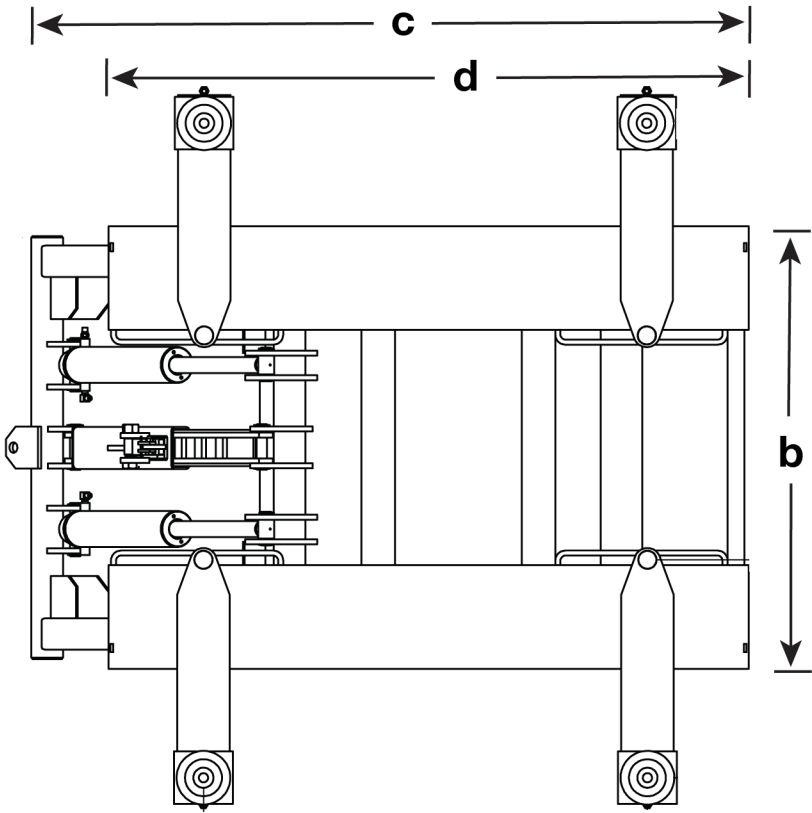

Top View

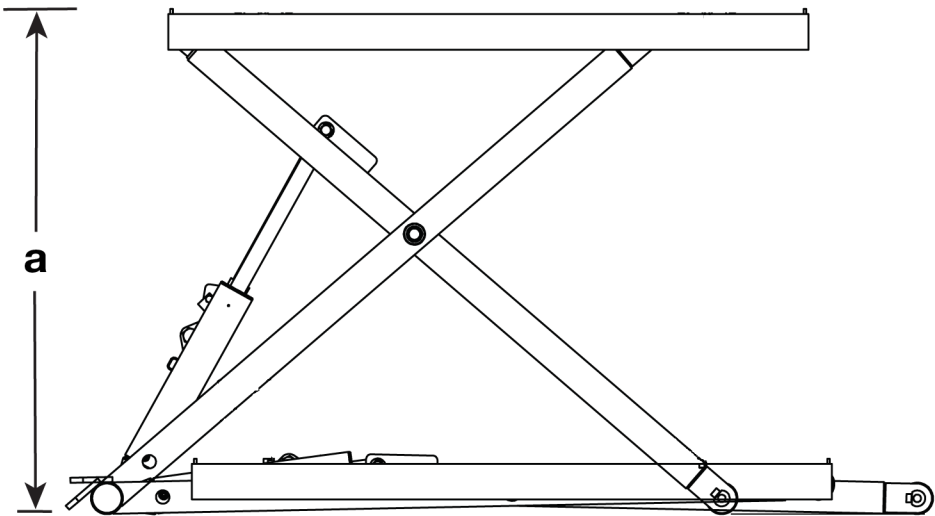

Side View

<b>Model</b>	<b>MD-6XP</b>
Lifting capacity	6,000 lbs. / 2,722 kg
<b>a</b> Lifting Height (no Pads)*	47" (3.9 feet) / 1,190 mm
<b>b</b> Overall Width	41.5" (3.6 feet) / 1,054 mm
<b>c</b> Overall Length	76" (6.4 feet) / 1,930 mm
<b>d</b> Frame Length	60" (5 feet) / 1,524 mm
Lowered Height	4.75" / 121 mm
Top Locking Position (no Pads)**	42" (3.5 feet) / 1,067 mm
Middle Locking Position (no Pads)**	33.25" (2.8 feet) / 844 mm
Bottom Locking Position (no Pads)**	22" (1.8 feet) / 562 mm
Raising/Lowering Time***	45 seconds
Motor****	115/220 VAC, 50/60 Hz, 1 Ph

\* Distance is from ground to top of Platform; does **not** include height of Arms or Pads.

\*\* For height comparison only; **do not raise a Vehicle without Lift Pads.**

\*\*\* Lowering is much slower with no Vehicle on the Lift.

\*\*\*\* Must specify at time of ordering.

**Specifications subject to change without notice.**