


# Thule Access 9037


**!** Failure to follow WARNINGS, THULE GUIDELINES or PRODUCT INSTRUCTIONS could result in the following: DAMAGE TO VEHICLE, PROPERTY DAMAGE AND SERIOUS PERSONAL INJURY OR DEATH.

## Warnings

- Do not exceed the HITCH manufactures **MAX TONGUE WEIGHT** capacity.
- This accessory is rated for **Class 3 or greater 2" receiver** hitches only.

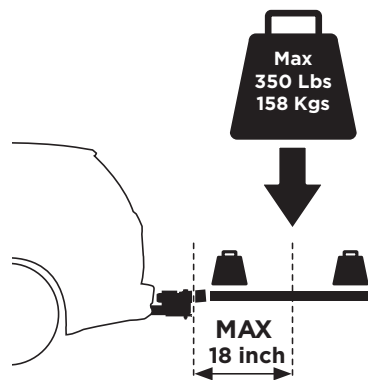


- With load centered less than 18" from Access pin hole, do not exceed 350 lbs max capacity.

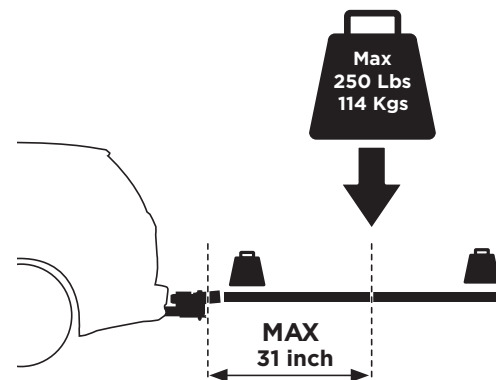

- With load centered greater than 18" from Access pin hole, do not exceed 250 lbs max capacity.



- This product is not for towing use.
- Do not use on towed vehicle.
- Do not use this product on RV's or trailers.
- This product is not approved for off-road use.

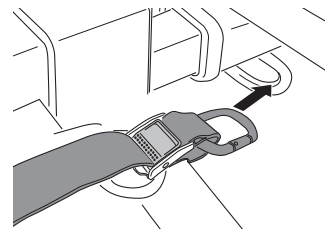

- Always use the safety strap, do not operate if damaged or missing.
- Keep hands away from PINCH POINTS.
- Do not allow children in the work area of this product when not in use.
- Do not attempt to move vehicle with adapter in open position.

## Caution!


- Confirm the product you intend to use is approved for use on Thule Access.
- Do not use this product upside down.
- Periodically check tightness of Thule Access in vehicle receiver.
- Make sure your rack and receiver are in good working order before use.
- Must mount to your vehicles receiver directly. Do not use hitch extenders.
- Do not take through automatic carwash.
- Obey all traffic posted traffic laws when using this product.
- The added distance and weight will amplify deflection. Drive responsibly.

## Approved Thule Bike Carrier Fits:

Product / Part number	Weight (lbs.)	Rack compatibility	Number of bike positions	Capacity (lbs.)		Lbs.	
				Each bike position	Max load	Rack weight	Total Rack and Bikes
<b>Thule Access</b>							
9037	55	Thule T2 Pro XT - 2 Bike	2	60	120	52	172
		Thule T2 Pro XT - 4 Bike	4	39	156	93	250
		Thule T2 Classic - 2 Bike	2	60	120	50	170
		Thule T2 Classic - 4 Bike	4	40	160	89.5	250
		Thule Range - 4 Bike	4	37.5	150	42	192

## Dimensions


Deployed Top View

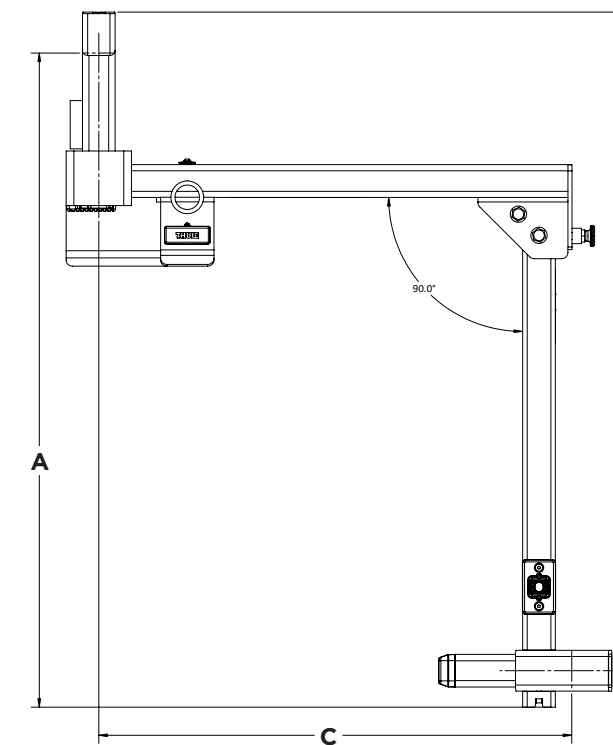


Front View



Top View

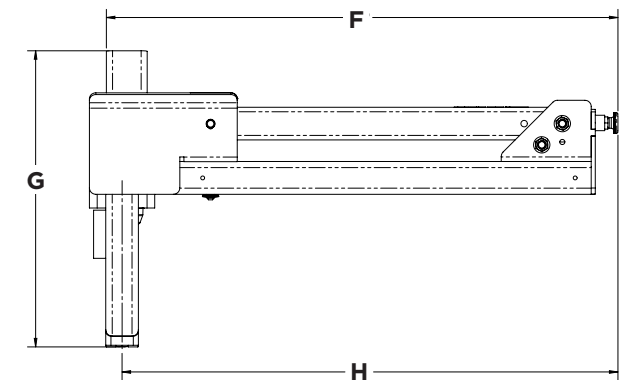

Side View

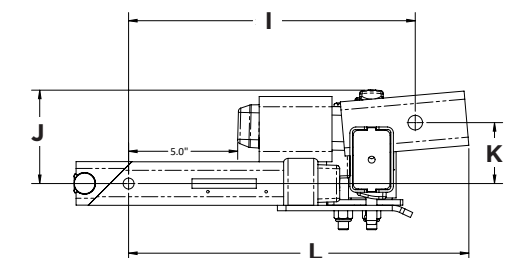

MODEL	A	B	C	D	E	F	G	H	I	J	K	L
9037	40.1"	40.4"	29"	6.4"	32.4"	31.3"	18.1"	30.4"	13.2"	4.3"	2.8"	15.6"