



REPLACEMENT O-RING KIT
For Oil Supply Adapter #15010
Catalog #15018
INSTALLATION INSTRUCTIONS


PLEASE study these instructions carefully before installing your new Edelbrock Oil Supply Adapter. If you have any questions or problems, do not hesitate to contact our Technical Hotline at: 1-800-416-8628, from 7am-5pm, Monday-Friday, Pacific Standard Time or via e-mail at: Edelbrock@Edelbrock.com. Please fill out and mail your warranty card.

- DESCRIPTION:
This kit includes three (3) replacement o-rings for oil supply adapter #15010 (Adapter #15010 is also used in Edelbrock Turbo Kits #1500, 1501, 1502, 1503, & 1504).
- KIT CONTENTS:
1 - Oil Adapter to Engine Block O-Ring
1 - Insert to Adapter Housing O-Ring
1 - Supply Fitting to Adapter Housing O-Ring

Installation Procedure

1. Disconnect your supply line from the adapter, remove oil filter (replace), and remove Oil Supply Sandwich Adapter using a 1/2" Allen wrench.
2. Dissassemble the adapter and replace o-rings (See Figure 1).
3. When reinstalling the adapter, make sure the adapter to engine block o-ring is facing toward the engine block, and the threaded stud with 1/2" hex opening is facing out.
4. Tighten with a 1/2" Allen wrench. Make sure the blue fitting is facing toward the driver's side, pointing upward slightly, about the 10 o'clock position.
5. Install a new oil filter.
6. Reattach your supply line.

FIGURE 1 - Oil Supply Adapter

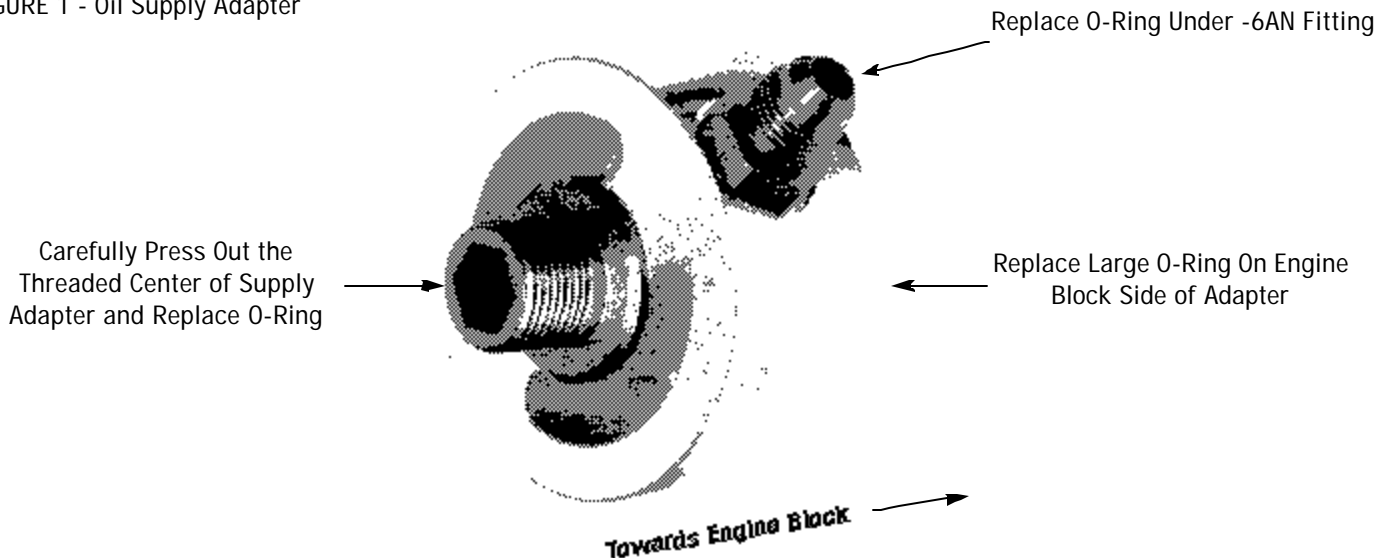

Edelbrock Corporation • 2700 California St. • Torrance, CA 90503
Tech Line: 1-800-416-8628 • E-Mail: Edelbrock@Edelbrock.com