



# INSTALLATION INSTRUCTIONS

## Street Fire Coil PN 5524

**Parts Included:**

1 - Coil, PN 5524

The Street Fire Coil is designed to mount in most factory canister coil mounts. It can be used with points replacement kits and aftermarket ignitions.

**WARNING:** During installation, disconnect the battery cables. When disconnecting the battery, always remove the Negative (-) cable first and install it last.

**STOCK IGNITION**

**Note:** If used with a points distributor, a ballast resistor may be required.

1. Mark the original coil wires as positive (+) and negative (-) and remove the wires.
2. Remove the high voltage coil wire (spark plug wire) and remove the coil from the bracket.
3. Install the Street Fire Coil into the mount and tighten. Install the wiring and high voltage coil wire.

**WIRING TO A STREET FIRE CDI**

When installing this coil with a Street Fire CDI, there will only be two wires making direct contact to the coil terminals: The Orange Wire from the CDI connects to the coil positive (+) terminal. The small Black wire from the CDI connects to the coil negative (-) terminal (Figure 1).

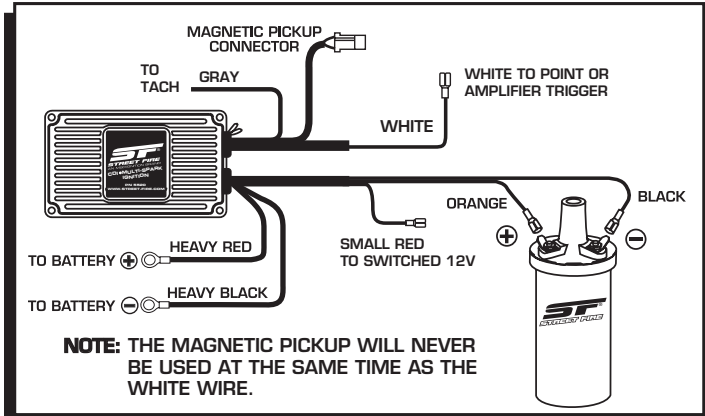


Figure 1 Wiring to a Street Fire Ignition.

STREET FIRE • WWW.STREET-FIRE.COM • (915) 857-5200 • FAX (915) 857-3344



# INSTALLATION INSTRUCTIONS

## Street Fire Coil PN 5524

**Parts Included:**

1 - Coil, PN 5524

The Street Fire Coil is designed to mount in most factory canister coil mounts. It can be used with points replacement kits and aftermarket ignitions.

**WARNING:** During installation, disconnect the battery cables. When disconnecting the battery, always remove the Negative (-) cable first and install it last.

**STOCK IGNITION**

**Note:** If used with a points distributor, a ballast resistor may be required.

1. Mark the original coil wires as positive (+) and negative (-) and remove the wires.
2. Remove the high voltage coil wire (spark plug wire) and remove the coil from the bracket.
3. Install the Street Fire Coil into the mount and tighten. Install the wiring and high voltage coil wire.

**WIRING TO A STREET FIRE CDI**

When installing this coil with a Street Fire CDI, there will only be two wires making direct contact to the coil terminals: The Orange Wire from the CDI connects to the coil positive (+) terminal. The small Black wire from the CDI connects to the coil negative (-) terminal (Figure 1).

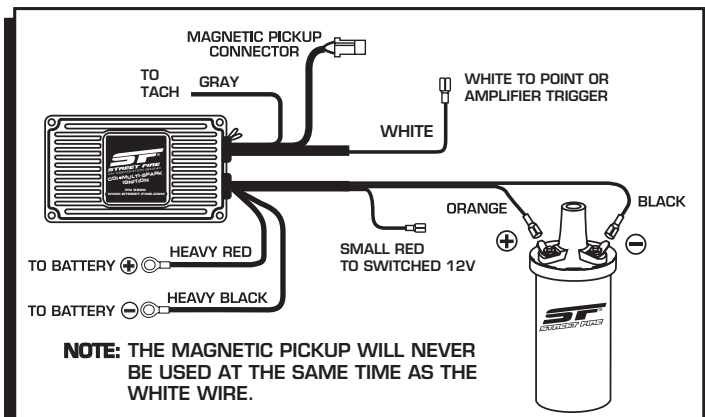


Figure 1 Wiring to a Street Fire Ignition.

STREET FIRE • WWW.STREET-FIRE.COM • (915) 857-5200 • FAX (915) 857-3344



# INSTALLATION INSTRUCTIONS

## Service

In case of malfunction, this MSD component will be repaired free of charge according to the terms of the warranty. When returning MSD components for warranty service, **Proof of Purchase** must be supplied for verification. After the warranty period has expired, repair service is based on a minimum and maximum fee.

**All returns must have a Return Material Authorization (RMA) number** issued to them before being returned. To obtain an RMA number please contact MSD Customer Service at 1 (888) MSD-7859 or visit our website at [www.msperformance.com/rma](http://www.msperformance.com/rma) to automatically obtain a number and shipping information.

When returning the unit for repair, leave all wires at the length in which you have them installed. Be sure to include a detailed account of any problems experienced, and what components and accessories are installed on the vehicle. The repaired unit will be returned as soon as possible using Ground shipping methods (ground shipping is covered by warranty). For more information, call MSD at (915) 855-7123. MSD technicians are available from 7:00 a.m. to 5:00 p.m. Monday - Friday (mountain time).

## Limited Warranty

MSD warrants this product to be free from defects in material and workmanship under its intended normal use\*, when properly installed and purchased from an authorized MSD dealer, for a period of one year from the date of the original purchase. This warranty is void for any products purchased through auction websites. If found to be defective as mentioned above, it will be repaired or replaced at the option of MSD. Any item that is covered under this warranty will be returned free of charge using Ground shipping methods.

This shall constitute the sole remedy of the purchaser and the sole liability of MSD. To the extent permitted by law, the foregoing is exclusive and in lieu of all other warranties or representation whether expressed or implied, including any implied warranty of merchantability or fitness. In no event shall MSD or its suppliers be liable for special or consequential damages.

\*Intended normal use means that this item is being used as was originally intended and for the original application as sold by MSD. Any modifications to this item or if it is used on an application other than what MSD markets the product, the warranty will be void. It is the sole responsibility of the customer to determine that this item will work for the application they are intending. MSD will accept no liability for custom applications.

**STREET FIRE • WWW.STREET-FIRE.COM • (915) 857-5200 • FAX (915) 857-3344**  
© 2014 MSD LLC  
**FRM29488 Revised 01/14 Printed in U.S.A.**



# INSTALLATION INSTRUCTIONS

## Service

In case of malfunction, this MSD component will be repaired free of charge according to the terms of the warranty. When returning MSD components for warranty service, **Proof of Purchase** must be supplied for verification. After the warranty period has expired, repair service is based on a minimum and maximum fee.

**All returns must have a Return Material Authorization (RMA) number** issued to them before being returned. To obtain an RMA number please contact MSD Customer Service at 1 (888) MSD-7859 or visit our website at [www.msperformance.com/rma](http://www.msperformance.com/rma) to automatically obtain a number and shipping information.

When returning the unit for repair, leave all wires at the length in which you have them installed. Be sure to include a detailed account of any problems experienced, and what components and accessories are installed on the vehicle. The repaired unit will be returned as soon as possible using Ground shipping methods (ground shipping is covered by warranty). For more information, call MSD at (915) 855-7123. MSD technicians are available from 7:00 a.m. to 5:00 p.m. Monday - Friday (mountain time).

## Limited Warranty

MSD warrants this product to be free from defects in material and workmanship under its intended normal use\*, when properly installed and purchased from an authorized MSD dealer, for a period of one year from the date of the original purchase. This warranty is void for any products purchased through auction websites. If found to be defective as mentioned above, it will be repaired or replaced at the option of MSD. Any item that is covered under this warranty will be returned free of charge using Ground shipping methods.

This shall constitute the sole remedy of the purchaser and the sole liability of MSD. To the extent permitted by law, the foregoing is exclusive and in lieu of all other warranties or representation whether expressed or implied, including any implied warranty of merchantability or fitness. In no event shall MSD or its suppliers be liable for special or consequential damages.

\*Intended normal use means that this item is being used as was originally intended and for the original application as sold by MSD. Any modifications to this item or if it is used on an application other than what MSD markets the product, the warranty will be void. It is the sole responsibility of the customer to determine that this item will work for the application they are intending. MSD will accept no liability for custom applications.

**STREET FIRE • WWW.STREET-FIRE.COM • (915) 857-5200 • FAX (915) 857-3344**  
© 2014 MSD LLC  
**FRM29488 Revised 01/14 Printed in U.S.A.**