

Installation Instructions for 15906

Fuel Pressure Regulator – Not for use with Alcohol

with -10AN Inlet and -08AN Outlets

Caution: The installation of this product should be performed by a person knowledgeable in the repair and modification of a fuel delivery system.

1. Read all of the instructions before beginning the installation.
2. With the ignition off and the battery disconnected, relieve any residual fuel system pressure.
3. Place a catch pan beneath or shop towels around the regulator to catch any fuel that may be spilled during the installation.
4. Locate a suitable location to mount the regulator inside of the engine compartment.
5. Using the supplied mounting bracket as a template, mark the mounting bracket holes. Using a 1/4" bit, drill 2 holes for the supplied 1/4"-20 bolts, lock washers and nuts.
6. Attach the bracket to the regulator using the supplied hardware.
7. Remove the plugs from the inlet and both outlets on the regulator.
8. Attach the fuel supply line from the tank to the regulator using a -10AN port fitting (not included) to the port at the bottom of the regulator marked "IN".
9. Attach the feed line(s) to the carburetor(s) using a -08AN port fitting(s) (not included) to the ports at either side of the regulator.
10. Install a -08AN port plug (not included) in the open outlet port if both sides are not utilized in this installation.
11. Tighten all connections.
12. Install a fuel pressure gauge by removing the 1/8"NPT pipe plug from the side of the regulator. Be sure to use liquid Teflon thread sealant (not included) on the gauge fitting.
13. Reconnect the battery and turn the key to the on position. Check for leaks and re-tighten if necessary.
14. Start the vehicle and adjust the fuel pressure by loosening the locknut and rotating the allen head set screw located at the top of the regulator.
15. Once the correct pressure is established tighten the locknut while holding the allen head set screw in place.
16. Remove and properly dispose of the fuel accumulated in the catch pan or shop towels during installation.

Maximum Inlet Pressure 20 PSI
 Inlet Port: -10AN Port
 Outlet Pressure: 5-12 PSI
 Outlet Ports: -08AN Port

Required Fittings

Inlet:

- 555-110166 -10AN Port x -8AN Hose
- 555-110167 -10AN Port x -10AN Hose
- 555-110168 -10AN Port x -12AN Hose

Outlet:

- 555-110162 -8AN Port x -6AN Hose
- 555-110163 -8AN Port x -8AN Hose
- 555-110164 -8AN Port x -10AN Hose


Optional Mounting Bracket:

4150

- 555-15283 Clear Anodized
- 555-15288 Black Anodized

4500

- 555-15293 Clear Anodized
- 555-15298 Black Anodized

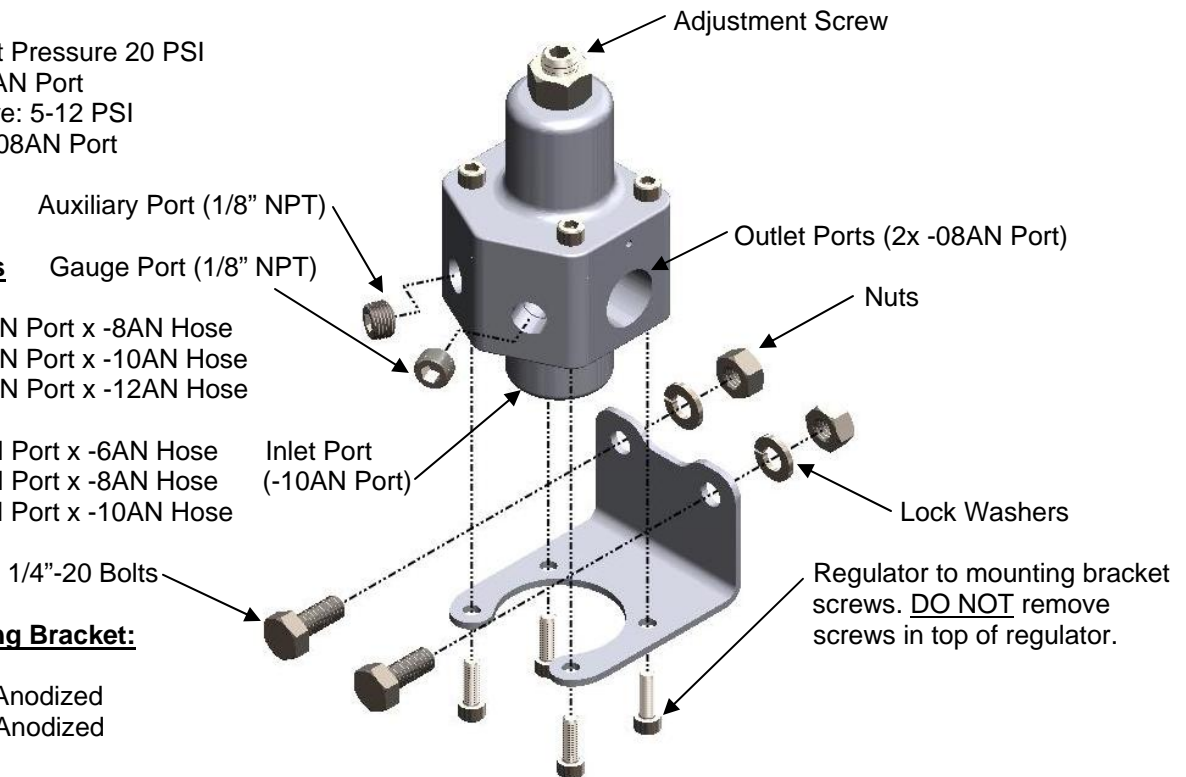

1-800-345-4545 jeps.com