




P.O. Box 1719
 Corona, CA 92878
 Support: 951-493-7100
 www.aFeFilters.com

Intake Kit Installation Instructions: '02-'05 Dodge Ram V8-4.7/5.7/5.9L (F/I)

Kit Part #	54-10381	Tools Required:	Part List:
Make:	Dodge	5/16" nut driver or slotted screwdriver	1 Air filter (replacement # 24-90030)
Model	Year	Ratchet and extension	1 Intake housing
Ram 1500	'02-'05		1 Vacuum cap
Ram 1500	'03-'05		
Ram 2500	'03-'05		
Ram 3500	'03-'05		
Ram 1500	'02-'03		
Ram 2500	'02-'03		

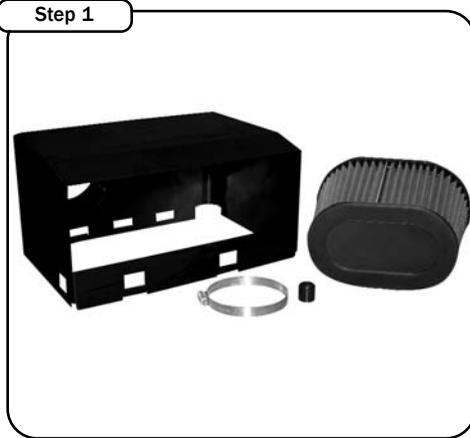

Complete kit



Complete stock intake.



Loosen hose clamp on the air duct connecting to the airbox. Disconnect the breather hose (if equipped). Move air duct to the side



Loosen the four clips securing the upper portion of the airbox.




Remove upper portion of the airbox. Lift up and remove the factory paper filter.



Insert and tighten your pre-oiled filter into the housing. Do not use any grease or oil.




Insert housing assembly into the lower portion of the factory airbox. Secure housing with the factory airbox clips.

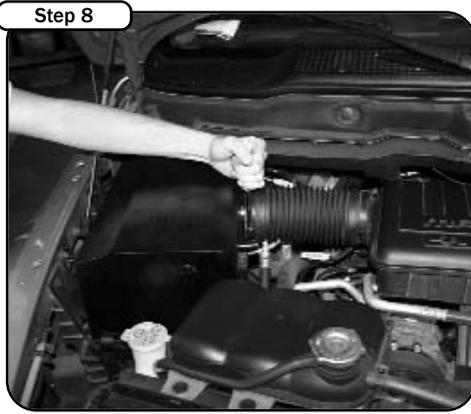

Re-connect air duct to the air filter housing. Tighten the factory hose clamp.



Re-connect your breather hose to the filter nipple. If your vehicle is not equipped with a breather hose, cap off the nipple with with the supplied vacuum cap.

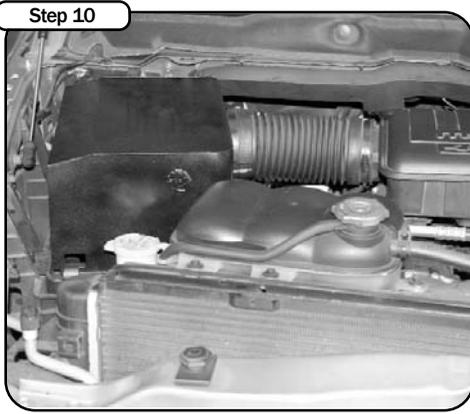

Place enclosed CARB EO sticker on a clean/smooth surface on or near the intake system. EO identification label is required in passing the Smog Check inspection. Your installation is now complete. Tighten all connections and clamps. Re-check after a few hours.

Note: Filter Cleaning and Re-oiling: When cleaning your aFe filter, be sure to use only aFe's "Restore Kit" (aFe P/N: 90-50001 blue oil aerosol, or aFe P/N: 90-50501 blue squeeze bottle oil or aFe P/N: 90-50000 gold oil aerosol, or aFe P/N: 90-50500 gold squeeze oil).
 Filter Replacement: Magnum FLOW PN: 24-90030 (black w/blue media).