



409S, Stainless Steel

Installation Instructions for:

Y-PIPE #81108

2015 MUSTANG

2.3L & 3.6L ENGINES

Fast-Back Models Only. Does Not Fit Convertible.

Instructions for installing #81108 Y-Pipe assembly with a Flowmaster Axle-back system.


Removal:

04/02/15

1) Raise the vehicle up on a hoist or rack to working height. If you don't have access to a hoist or rack, raise the vehicle and support securely with jack stands. To ease the removal of the stock system, spray a penetrating lubricant onto the bolts of the two clamp connections just forward of the center resonator as well as the rubber hangers just behind the rear differential and at the rear of the vehicle.



2) Place a stand under the center resonator just forward of the axle-back muffler assemblies. Loosen the clamps at the inlets of the Flowmaster or Hurst axle-back mufflers.

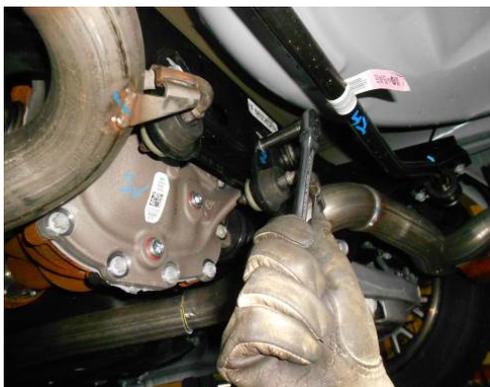

3) Using a 13mm wrench, loosen the two hangers just behind the rear differential from the cross member and the two hanger mounts at the rear of the vehicle from the frame. Slide the muffler assemblies toward the rear of the vehicle to disengage them from the factory system. Leave them hanging in place for re-assembly onto the Flowmaster Y-pipe assembly.



4) Using a 15mm wrench, loosen the two bolts at the clamp connection in the center of the vehicle. Use a small screwdriver to lift the clip and with the help of an assistant, carefully lower the stands at the rear of the resonator and slide the system toward the rear and off of the front pipe. Lower the resonator from the vehicle. The clamp should remain on the factory front pipe as it will be re-used with the new Flowmaster system.

Installation:



1) Be sure that the factory band clamp from the resonator inlet is in place on the front pipe behind the catalytic converters. Place the Y-pipe assembly **#86320S** up into position behind the factory front pipe and slide into the clamp until it stops. Support the rear of the Y-pipe with a stand and tighten the clamp enough to hold, but still allow for adjustment. The Y-pipe outlet with two bends will be oriented to the drivers' side of the vehicle.

2) Place the inlets of the axle-back muffler assemblies onto the back of the Flowmaster Y-pipe, slide them on approx. 2" and tighten the clamps enough to hold, but still allow for adjustment. See steps 4 and 5 on page 5 for final adjustment steps.

The steps on the following pages are intended for customers replacing the center resonator of their vehicle and retaining the use of the factory Mustang mufflers. If you are using the new Flowmaster Y-pipe along with a Flowmaster Axle-back system, please see pages 1 and 2 above.

Removal:

1) Raise the vehicle up on a hoist or rack to working height. If you don't have access to a hoist or rack, raise the vehicle and support securely with jack stands. To ease the removal of the stock system, spray a penetrating lubricant onto the bolts of the two clamp connections just forward of the center resonator.



2) Begin by marking both resonator exit pipes at the beginning of the straight area as shown in the photo at left. Support the exhaust system both in front and behind the area to be cut. Check that the marks are correct, then using a sawsall, cut both pipes at the marks. **Note: Due to the closeness of the pipes to the gas tank, use caution when cutting!** Carefully deburr the end of the muffler inlet pipes where cut with a file or die grinder.



3) Using a 15mm wrench, loosen the two bolts at the clamp connection in the center of the vehicle. Use a small screwdriver to lift the clip and with the help of an assistant, carefully lower the stands at the rear of the resonator and slide the system toward the rear and off of the front pipe. Lower the resonator from the vehicle. The clamp should remain on the factory front pipe as it will be re-used with the new Flowmaster system.

Installation:



1) When using the **#86320S** Y-Pipe assembly with the factory Mustang mufflers, you must first trim 2.50" from the end of both pipes at the back of the assembly. Make a mark 2.50" from the end of both pipes and cut using a hacksaw or sawsall. Use a file or die grinder to remove any burrs from the pipe ends. After cutting, slide on the **TB810S** adapter pipes onto the end of each outlet pipe. Place a supplied clamp onto the connections and tighten enough to hold.



2) Be sure that the factory band clamp from the resonator inlet is in place on the front pipe behind the catalytic converters. Place the Y-pipe assembly **#86320S** up into position behind the factory front pipe and slide into the clamp until it stops. Support the rear of the Y-pipe with a stand and tighten the clamp enough to hold, but still allow for adjustment. The Y-pipe outlet with two bends will be oriented to the drivers' side of the vehicle.

3) Place a supplied clamp over the inlet pipe of the passenger side stock muffler. Slide the muffler toward the rear of the vehicle and place the inlet into the adapter at the back of the Y-Pipe assembly. Slide the clamp onto the slip connection and tighten enough to hold in place. Repeat this step on the drivers' side of the vehicle.

4) Adjust and level the Y-Pipe and muffler assemblies to provide a satisfactory fit. A minimum of 1/2" clearance around all parts of the system must be maintained; while keeping suspension travel and vibration in mind. After adjustments have been made, you may now securely tighten the clamped connections.

5) For a more secure installation, we highly recommend placing a minimum 1" weld on either side of the inlet slip-fit connections.

PACKING LIST

<u>Qty</u>	<u>Description</u>	<u>Part#</u>
1	Y-Pipe Assembly.	86320S
1	Hardware Pack	PK808
2	Adapter Pipes	TB810S
4	2 1/4" Clamp	MC225BS



409S, Stainless Steel

**Installation diagram for:
SYSTEM #81108**

2015 MUSTANG

2.3L & 3.6L ENGINES

Fast-Back Models Only. Does Not Fit Convertible.

