



Input Voltage	Controller Max Load	Power Consumption per 10" Strip	Power Consumption per 24" Tube	Controller Size
12V DC	6 amps (3 amps per zone)	0.1 amp	0.3 amp	4 x 2.33 x 0.73in (100x60x19mm)

Warranty and Disclaimer

Within three years after the purchase date, the original buyer may return any XKchrome controller that has failed due to a defect in materials or workmanship. LED strips and pods that have one or more LEDs fail to illuminate due to a defect in materials or workmanship are covered with a lifetime warranty for **the original buyer**.

Installation of this product must be performed by a licensed professional. Should the failure of the product be the result of damage occurring as a result of improper installation, alteration of the product or an act or omission on the part of the consumer, this warranty is void. XKGLOW Lighting shall not be responsible for any consequential damages which arise from the use and/or installation of the product. If the kit is installed in any manner other than specified, XKGLOW Lighting reserves the right to deny any warranty claims at the discretion of the technical support department. Any product return must include the original packaging, invoice number and a statement of the alleged defect. Upon receipt of the returned product, the company will test the product for defect. If the results of the testing do not support the warranty claim, do not reveal any defect or indicate consumer negligence in the installation and handling of the product, then the product will be returned to you and you will be charged a reshipping fee. If the product is returned from an address within the continental United States, within the first 30 days after purchase, and is found to be defective, XKGLOW Lighting will exchange or refund the original purchase expense. This offer does not extend to the cost for shipping charges on any international packages.

Additional Disclaimer Terms

Please check your local and state laws for the proper use of this product.

- Improper installation of electrical products such as lighting may cause damage to any vehicle or device to which the improperly handled or installed lighting is attached.
- Improperly installed product may cause electrical injury to persons.
- It is recommended that the kit should be installed by a licensed professional.
- XKGLOW assumes no liability for the installation of the product.
- Warranty or liability will not exceed the product purchase price, which shall be buyer's sole and exclusive remedy.


Return/Exchange Procedure

1. Email [xk@xkglow.com] to notify us of the product issue as well as the item number and name of customer on invoice.
2. We will send you the trouble-shooting guide to fix the issue, or to narrow down which of the component(s) need to be replaced. If the issue still exists, we will ask you to send back the defective items to be replaced.
3. Please send the returned item as instructed, along with claims and a telephone number where you can be reached.
4. After the returned item(s) have been accepted and inspected, we will issue a refund or replace the items ASAP. For refunds, item(s) must be sent to XKGLOW within 14 days from date of purchase. Original shipping charges are not refundable.


We always stand behind our products and are committed to our customers! For questions you may have, please contact xk@xkglow.com. We normally respond within 24 hours. (Monday-Friday).

Mounting Instructions

- 1. Test all components before mounting:** As shown below, plug ALL light units together and connect them to the controller and the switch wiring harness. Connect the RED battery terminal to the POSITIVE pole of 12V DC battery. Connect the BLACK battery terminal to the NEGATIVE pole. If you want to use the SMART SENSOR (all LEDs turn red when brake is applied), connect the red wire from the controller to 12V+ of brake light or brake fuse. Turn on the switch and push the touch button to test all lights. If the lights show any defects, please contact us and we will be happy to replace them for you.

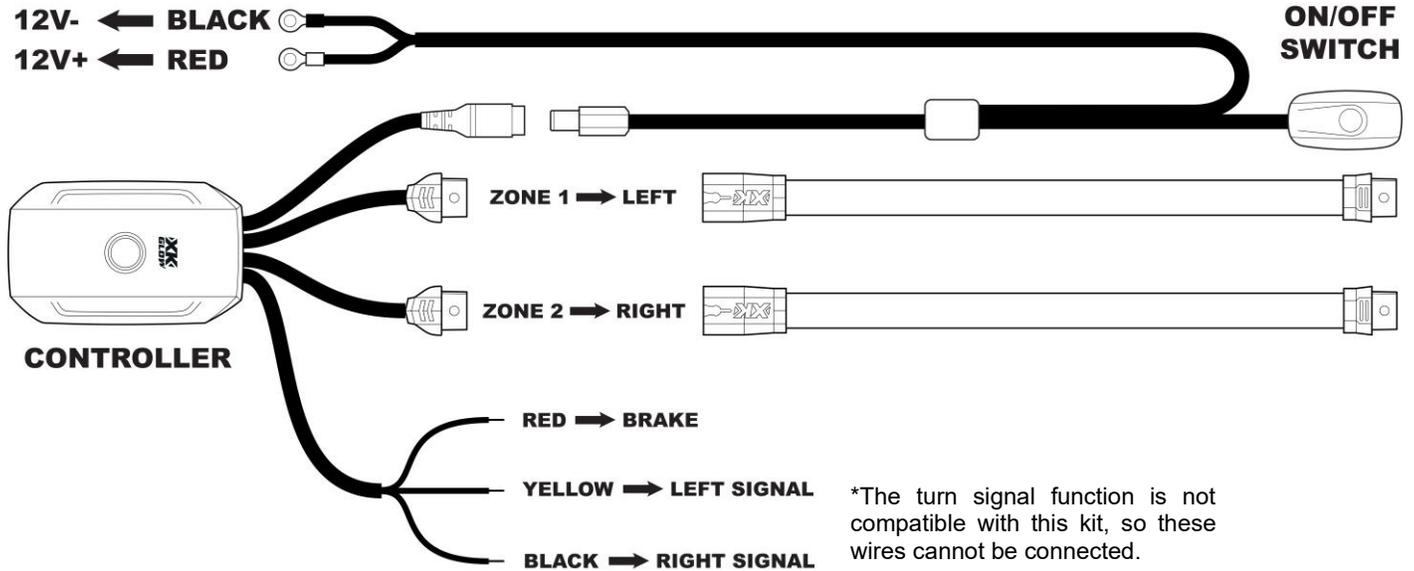



- 2. Mount the lights and wires:** Clean the mounting surface where the 10-inch strips will be stuck to (front bumper and under the dash). Peel off the 3M tape on the back of the light and attach the lights to those locations. Use the provided zip ties to mount the 24-inch tubes to the roll cage/ frame. Use the provided hardware to mount the cube lights. Connect all Y-splitters, extension wires and the switch wiring harness. **WARNING-** Do not force the plugs together! If they don't snap together, verify that all the pins line up. If a pin is out of place, it must be straightened up for the plug to snap together. See **PAGE 3** for all mounting locations. See **PAGE 4** for zone layout.
- 3. Secure all wires and connectors:** Use provided zip ties to neatly mount and hide any loose wires. Make sure they are not touching anything hot or located on moving parts. Locate the ON/OFF switch in a dry and convenient location. Used provided silicon end caps to cover all uncovered connectors.
- 4. Wiring Add-On Relay Kit for Smart Brake Feature:** To utilize the controller's Smart Brake feature, the red wire on the controller must be wired into the ADD-ON RELAY KIT shown. Please refer to your owner's manual to locate the switched ground from the vehicle's taillight.

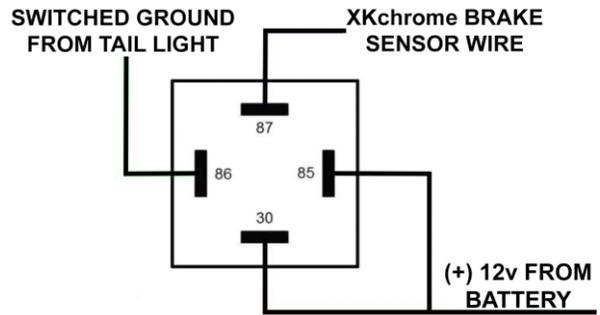


- 5. Connect to 12V DC power:** Firmly connect the wire terminals to the positive and negative poles of the battery. Power on, download the **XKchrome** App, and enjoy!




Please note: There are multiple XKGLOW apps on the App Store. Only the XKchrome App will work with the XKchrome Bluetooth Controller. The App icon is pictured here.

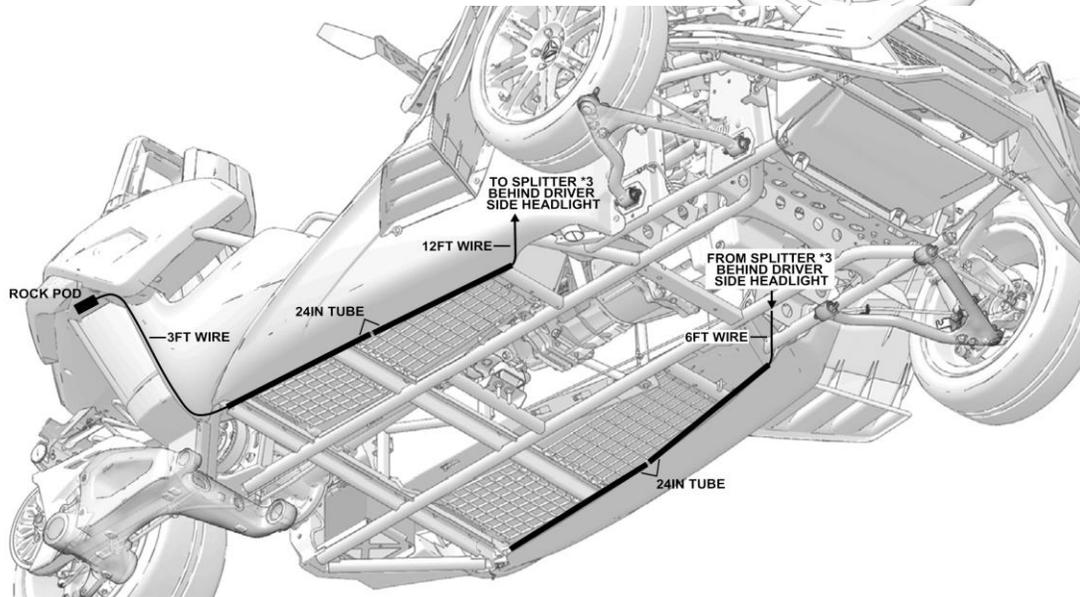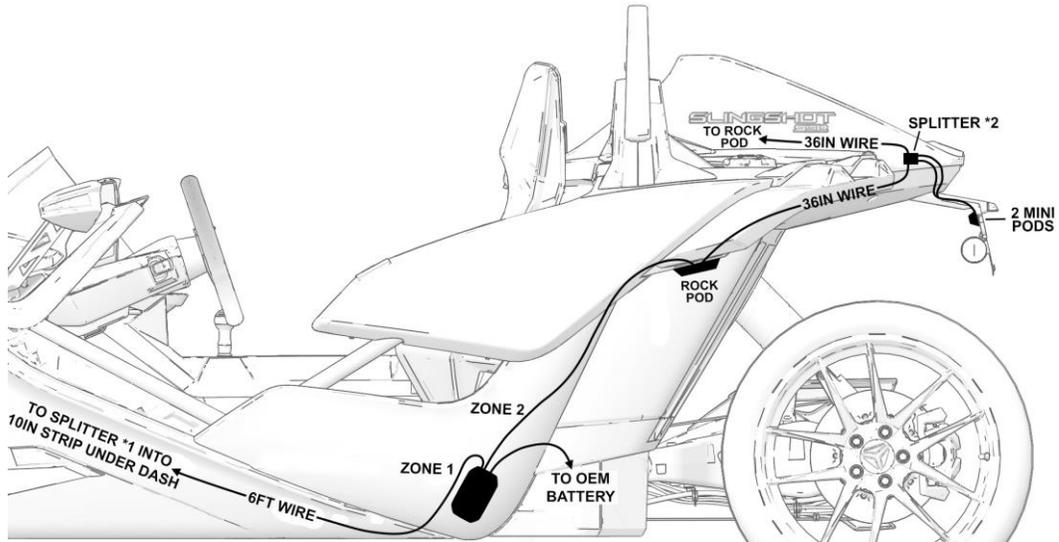

ZONE 1- 2PC 10IN STRIPS UNDER DASH, 2 ROCK PODS, 24IN TUBE BEHIND GRILL
ZONE 2- 5PC 10IN STRIPS ON BUMPER, 4PC 24IN TUBES UNDERGLOW, REAR LIGHTS

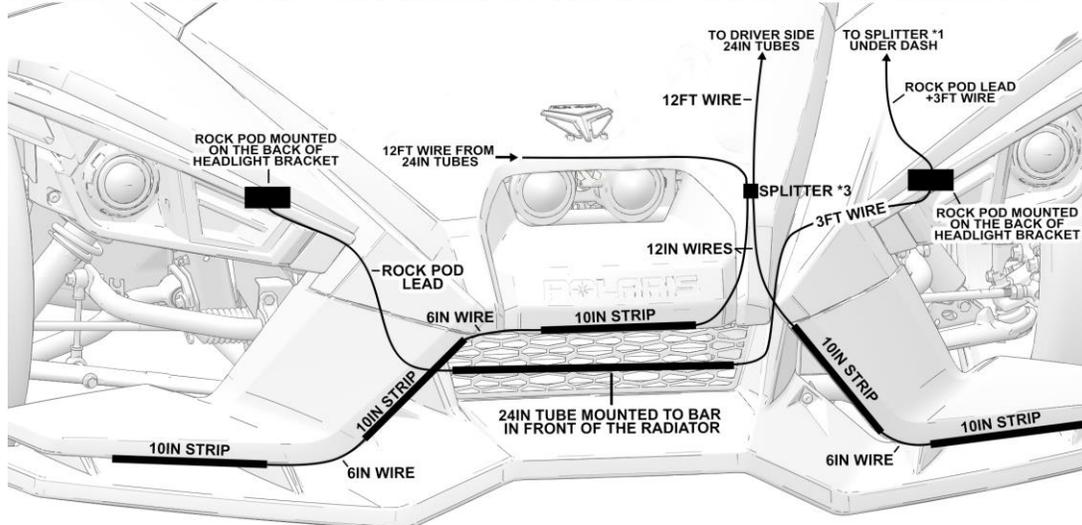

ZONE 1

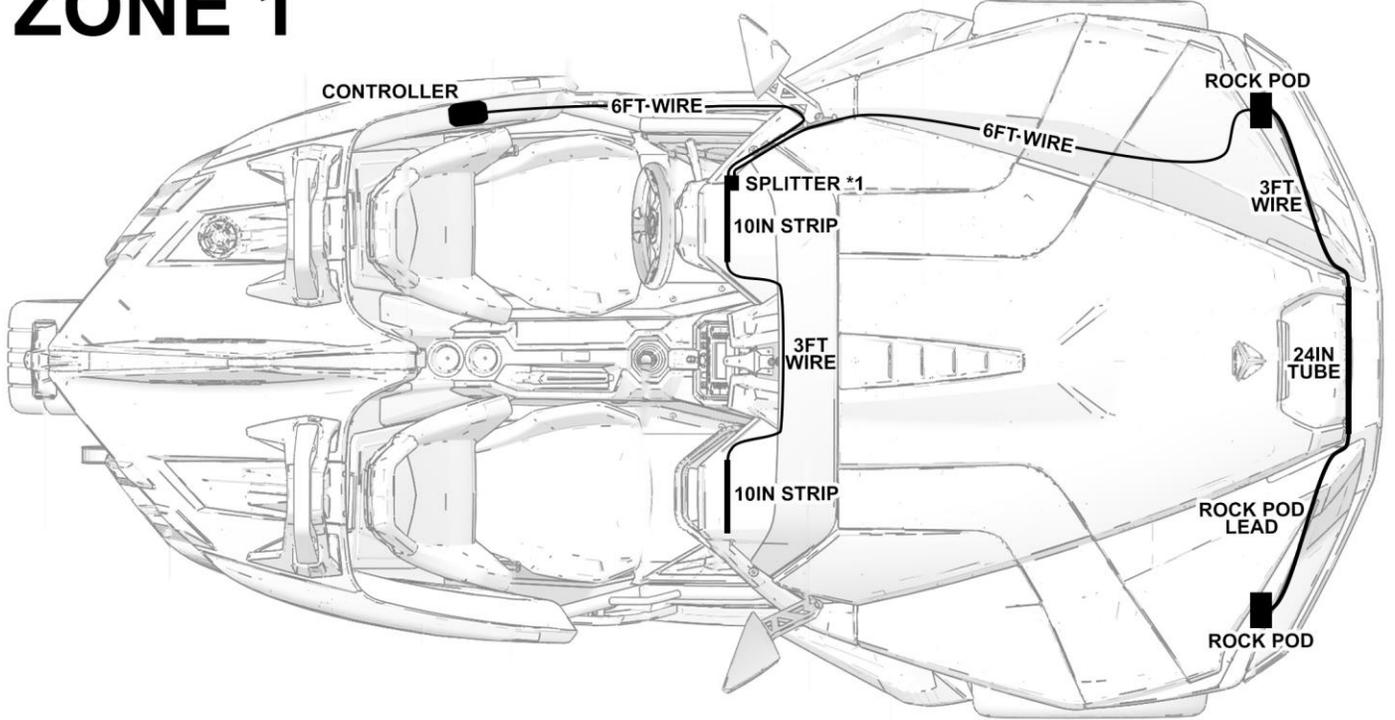

ZONE 2

