LoadLIFTER 5000™ ULTIMATE


ADJUSTABLE AIR HELPER SPRINGS

TOW AND HAUL WITH SAFETY AND COMFORT™

AIR LIFT®
Since 1949

Kit Number

88299

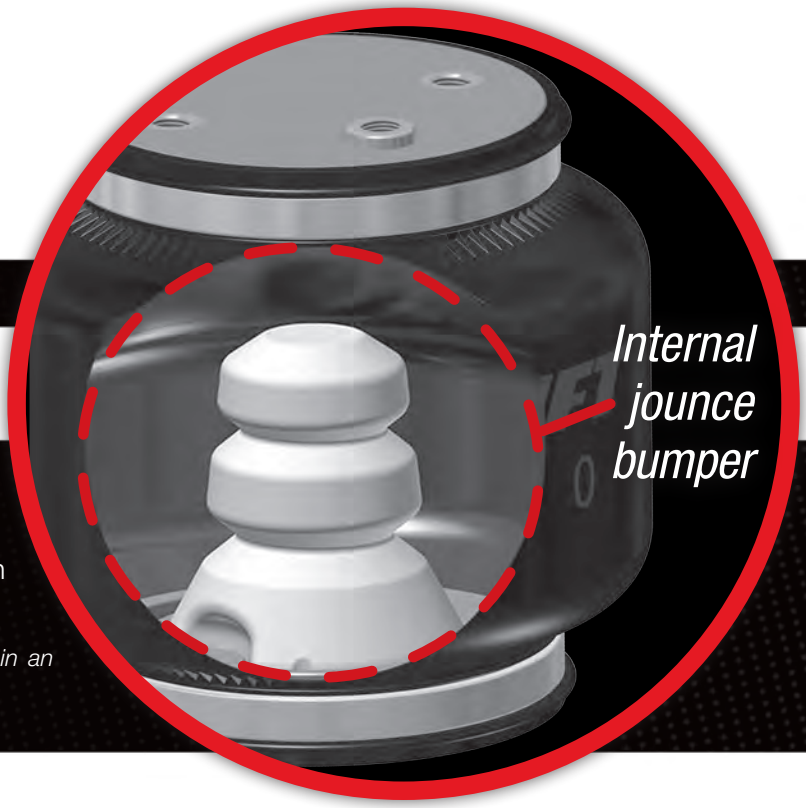

INSTALLATION GUIDE

For maximum effectiveness and safety, please read these instructions completely before proceeding with installation.

Failure to read these instructions can result in an incorrect installation.

MN-826 • (011301) • ERN 7484

TABLE OF CONTENTS

Introduction 2
Important Safety Notice 2
Notation Explanation 2

Installation Diagram 3
Hardware List 4
Tools List 4

Installing the LoadLifter 5000 Ultimate System 4
Getting Started 4
Assembling the Air Spring 5
Installing the Air Spring Assembly 6
Installing the Air Lines 7
Checking For Leaks 8
Fixing Leaks 9

Before Operating 10
Installation Checklist 10
Post-Installation Checklist 10

Product Use, Maintenance and Servicing 11
Minimum Recommended Pressure and Maximum Pressure 11
Maintenance Guidelines 11
Troubleshooting Guide 11
Frequently Asked Questions 12
Tuning the Air Pressure 12
Guidelines for Adding Air 13

Choosing the Right On-Board Air Compressor System 14

Warranty and Returns Policy 15

Replacement Information 16

Introduction

The purpose of this publication is to assist with the installation, maintenance and troubleshooting of the LoadLifter 5000 Ultimate air spring kit. LoadLifter 5000 Ultimate utilizes sturdy, reinforced, commercial grade single or double, depending on the kit, convolute bellows. The bellows are manufactured like a tire with layers of rubber and cords that control growth. An internal jounce bumper inside the spring absorbs shock and eliminates harsh jarring on rough roads. The internal jounce bumper replaces the factory bumper and allows the air springs to safely be run at zero air pressure. LoadLifter 5000 Ultimate kits are recommended for most ¾ and 1 ton pickups and SUVs with leaf springs and provide up to 5,000 lbs. of load leveling support with air adjustability from 5-100 PSI. The kits are also used in motorhome rear kits and some motorhome fronts where leaf springs are used.

It is important to read and understand the entire installation guide before beginning installation or performing any maintenance, service or repair. The information here includes a hardware list, tool list, step-by-step installation information, maintenance tips, safety information and a troubleshooting guide.

Air Lift Company reserves the right to make changes and improvements to its products and publications at any time. For the latest version of this manual, contact Air Lift Company at (800) 248-0892 or visit our website at www.airliftcompany.com.

IMPORTANT SAFETY NOTICE

The installation of this kit does not alter the Gross Vehicle Weight Rating (GVWR) or payload of the vehicle. Check your vehicle's owner's manual and do not exceed the maximum load listed for your vehicle.

Gross Vehicle Weight Rating: The maximum allowable weight of the fully loaded vehicle (including passengers and cargo). This number — along with other weight limits, as well as tire, rim size and inflation pressure data — is shown on the vehicle's Safety Compliance Certification Label.

Payload: The combined, maximum allowable weight of cargo and passengers that the vehicle is designed to carry. Payload is GVWR minus the Base Curb Weight.

NOTATION EXPLANATION

Hazard notations appear in various locations in this publication. Information which is highlighted by one of these notations must be observed to help minimize risk of personal injury or possible improper installation which may render the vehicle unsafe. Notes are used to help emphasize areas of procedural importance and provide helpful suggestions. The following definitions explain the use of these notations as they appear throughout this guide.

⚠ DANGER INDICATES IMMEDIATE HAZARDS WHICH WILL RESULT IN SEVERE PERSONAL INJURY OR DEATH.

⚠ WARNING INDICATES HAZARDS OR UNSAFE PRACTICES WHICH COULD RESULT IN SEVERE PERSONAL INJURY OR DEATH.

⚠ CAUTION INDICATES HAZARDS OR UNSAFE PRACTICES WHICH COULD RESULT IN DAMAGE TO THE MACHINE OR MINOR PERSONAL INJURY.

NOTE *Indicates a procedure, practice or hint which is important to highlight.*

Installation Diagram

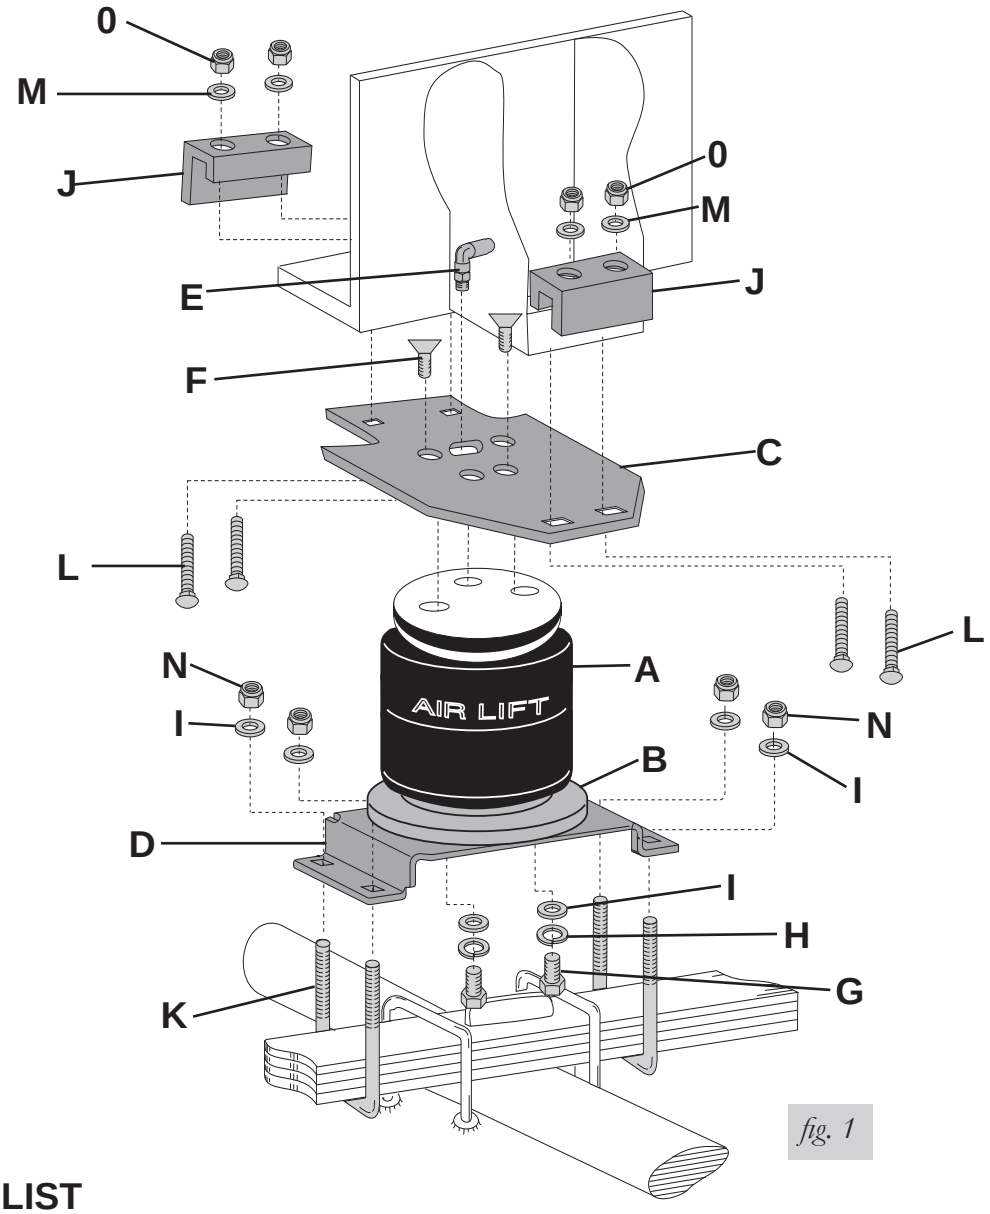


fig. 1

HARDWARE LIST

Item	Part #	Description	Qty
A	58736	Air spring	2
B	11951	Roll plate	2
C	07510	Upper bracket	2
D	03008	Lower bracket	2
E	21953	Swivel elbow fitting	2
F	17215	3/8” Flat head screw	4
G	17203	3/8” Hex head cap screw	4
H	18427	3/8” Lock washer	4
I	18444	3/8” Flat washer	12
J	01801	Clamp bar	4
K	10583	3/8” U-bolt	4

Item	Part #	Description	Qty
L	17374	5/16” Carriage bolt	8
M	18433	5/16” Flat washer	8
N	18435	3/8” Nyloc nut	8
O	18438	5/16” Nyloc nut	8
AA	20086	Air line	1
BB	10466	Tie strap	6
CC	21230	Valve cap	2
DD	18405	5/16” Flat washer	2
EE	21234	Rubber washer	2
FF	18411	Star washer	2
GG	21233	5/16” Hex nut	4

STOP! Missing or damaged parts? Call Air Lift customer service at (800) 248-0892 for a replacement part.

TOOLS LIST

Description	Qty
Hoist or floor jacks	1
Safety stands	2
Safety glasses	1
Torque wrench	1
5/16” open-end or box wrench	1
7/16” open-end or box wrench	1
9/16” open-end or box wrench	1
Crescent wrench	1

Description	Qty
Ratchet with 9/16”, metric, & 1/2” deep well sockets	1
5/16” drill bit (very sharp)	2
Heavy duty drill	1
Hose cutter, razor blade, or sharp knife	1
Air compressor or compressed air source	1
Spray bottle with dish soap/water solution	1

Installing the LoadLifter 5000 Ultimate System

GETTING STARTED

⚠ DANGER

COMPRESSED AIR CAN CAUSE INJURY AND DAMAGE TO THE VEHICLE AND PARTS IF IT IS NOT HANDLED PROPERLY. FOR YOUR SAFETY, DO NOT TRY TO INFLATE THE AIR SPRINGS UNTIL THEY HAVE BEEN PROPERLY SECURED TO THE VEHICLE.

1. Jack up the rear of the vehicle using a jack or a hoist. Support the rear axle with jack stands and remove the rear wheels (fig. 2).

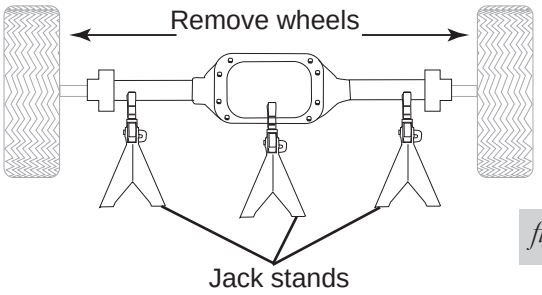


fig. 2

2. Bend the emergency brake cable bracket forward slightly on both sides of the vehicle (fig. 3).
3. It will be necessary to trim the stock jounce bumper to gain clearance for the air spring assembly’s lower bracket. Measure up from the base ¾” and mark a line on the jounce bumper. Using a box cutter or equivalent, cut the top of the jounce bumper off (fig. 3).

⚠ CAUTION

USE EXTREME CAUTION WHEN CUTTING OFF THE JOUNCE BUMPER WITH THE CUTTING TOOL.

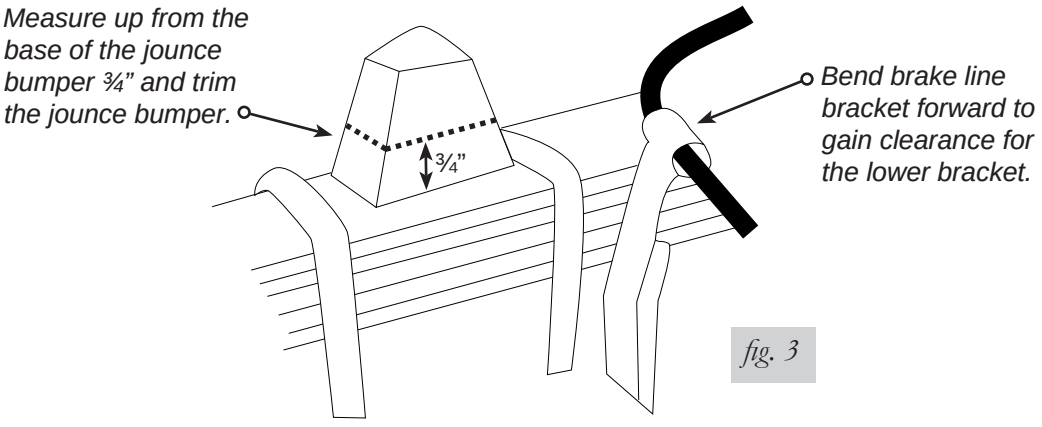


fig. 3

ASSEMBLING THE AIR SPRING

1. Install the 90˚ swivel air fitting to the top of the air spring. Tighten finger tight plus 1½ turns.
2. Attach the upper bracket to the air spring using the supplied 3/8” flat head screws (fig. 4). Torque to 20 ft/lbs.

NOTE

The fitting goes through an existing hole in the frame that is forward of the axle. Attach the left side bracket using the holes specified and attach the right side bracket using the holes specified (fig. 5).

3. Set a roll plate over the bottom of the bellows and attach the lower bracket to the air spring using the 3/8” bolt, lock and flat washer provided (fig. 4).

NOTE

The flange on the lower bracket should be on the same side of the air spring as the fitting on the upper bracket (fig. 4). These will both face the inside of the truck once installed.

INSTALLING THE AIR SPRING ASSEMBLY

1. Set the assembly onto the leaf spring. Index the fitting into the existing hole in the frame flange, forward of the axle (see fig.1 and fig. 6a).

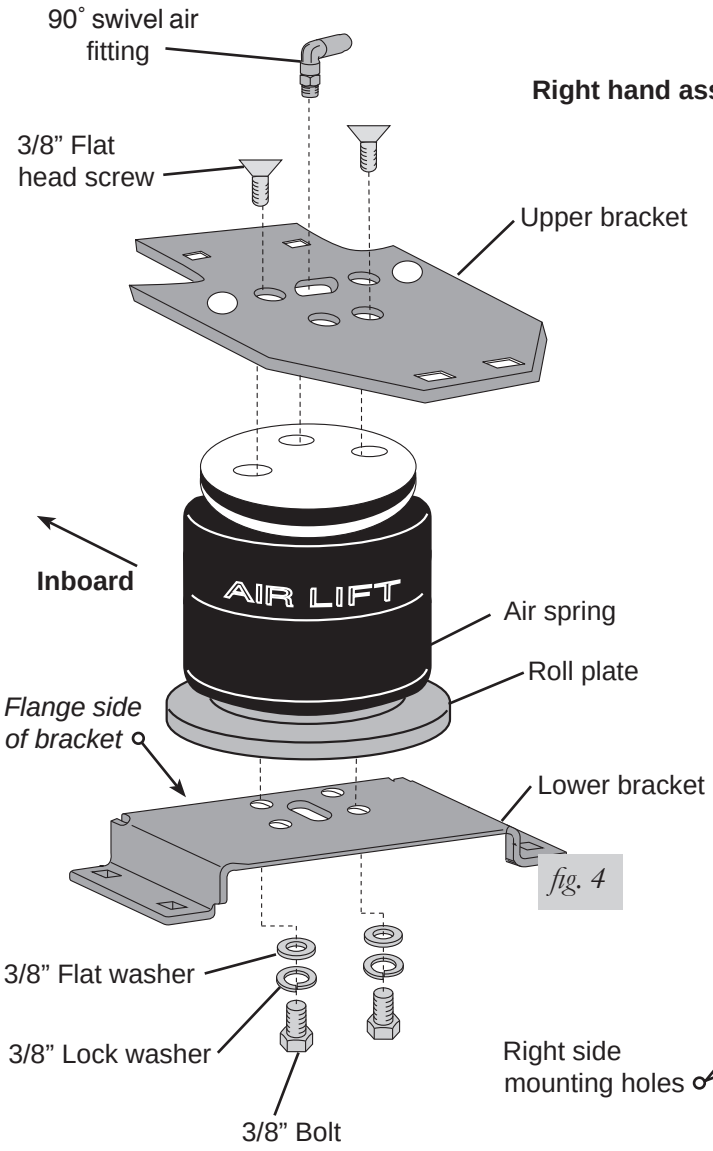


fig. 4

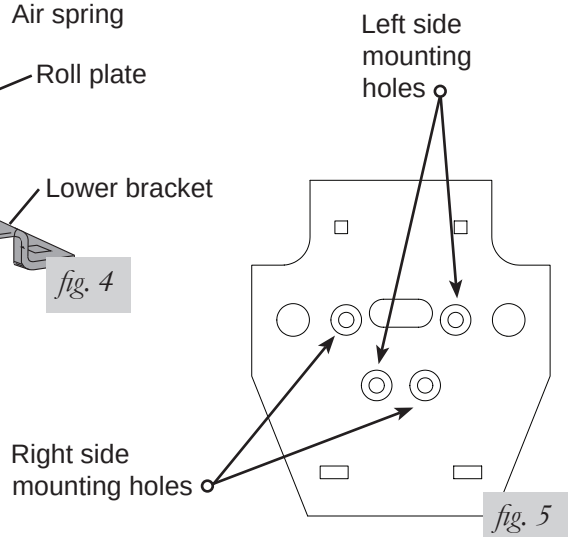


fig. 5

NOTE

The existing rivets in the frame will index into the large holes in the upper bracket (fig. 6).

⚠ CAUTION

THE FITTING ON THE ASSEMBLY IS FRAGILE. TAKE CARE WHEN INSERTING THE FITTING THROUGH THE HOLE IN THE FRAME.

2. Set the short leg of one clamp bar over the outside jounce bumper bracket and attach using the 5/16” carriage bolts, flat washers and nyloc nuts (fig. 6 and fig. 6b). Do not tighten at this time.
3. Set another clamp bar on the inside of the frame so that the short side of the clamp bar is on the frame. Attach using the 5/16” carriage bolts, flat washers and nyloc nuts (figs. 6 and 7).

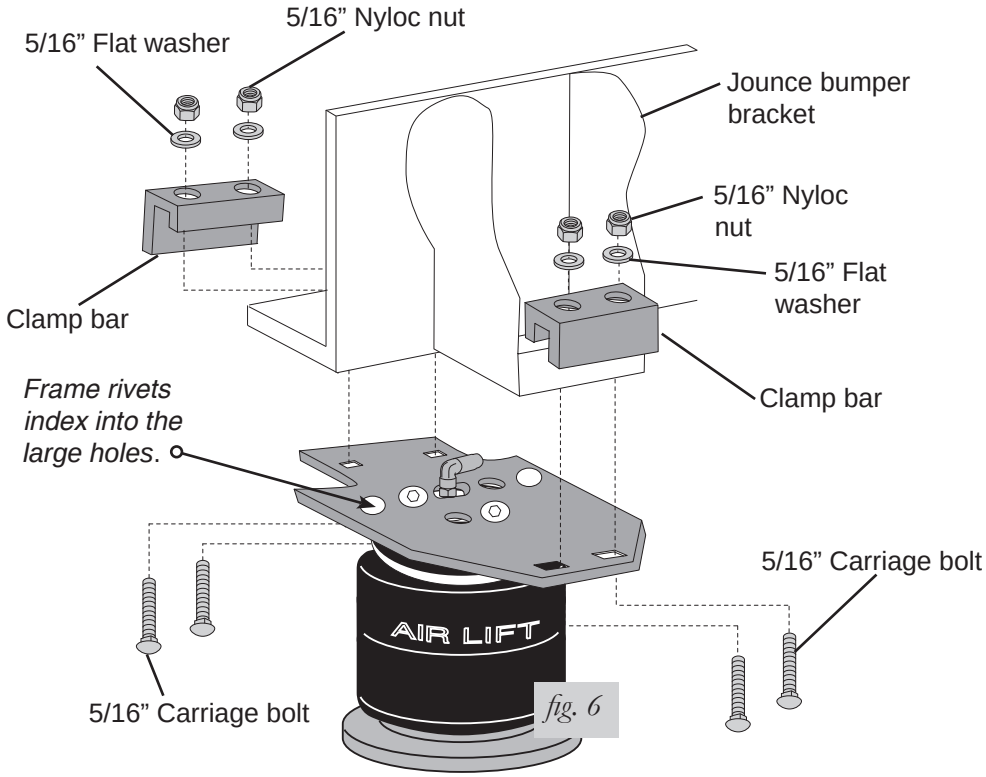


fig. 6

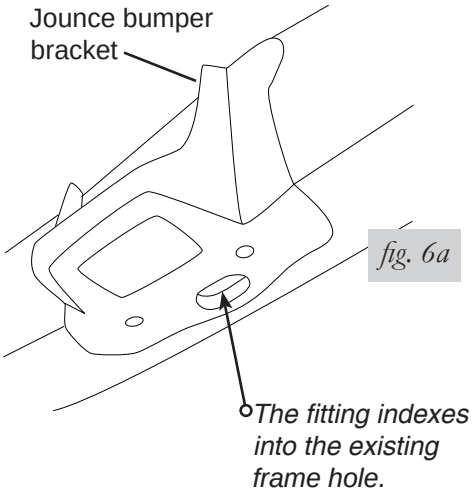


fig. 6a

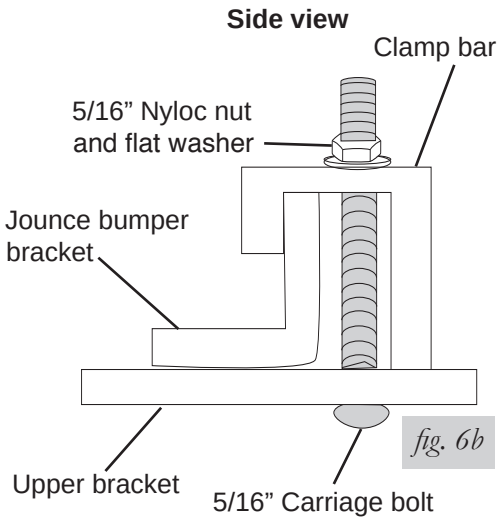


fig. 6b

4. With the existing frame rivets indexed into the upper bracket holes, tighten the carriage bolts down evenly using a cross pattern. Torque the bolts to 12 ft/lbs.
5. Move the lower bracket on the leaf spring to align the air spring so that it is close to being perpendicular between both brackets (fig. 8).

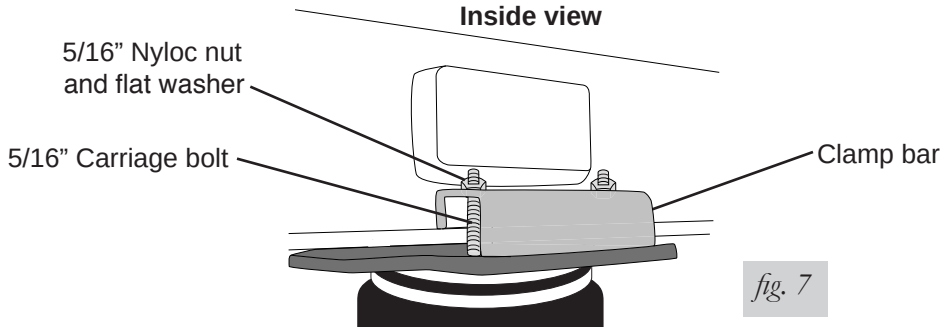


fig. 7

NOTE *The upper and lower brackets will not be parallel to each other once installed.*

6. Install the u-bolts under the leaf spring, through the lower bracket and cap with a 3/8” flat washer and nyloc nut. Torque the u-bolts evenly to 16 ft/lbs. Trim the excessive length of the u-bolts close to the nyloc nut (see figs. 1 and 8). Repeat for the opposite side.

NOTE *The jounce bumper has been cut to support the lower bracket. It will be necessary to draw the lower bracket into the jounce bumper using the u-bolts. This is an intentional way to mount the lower bracket.*

INSTALLING THE AIR LINES

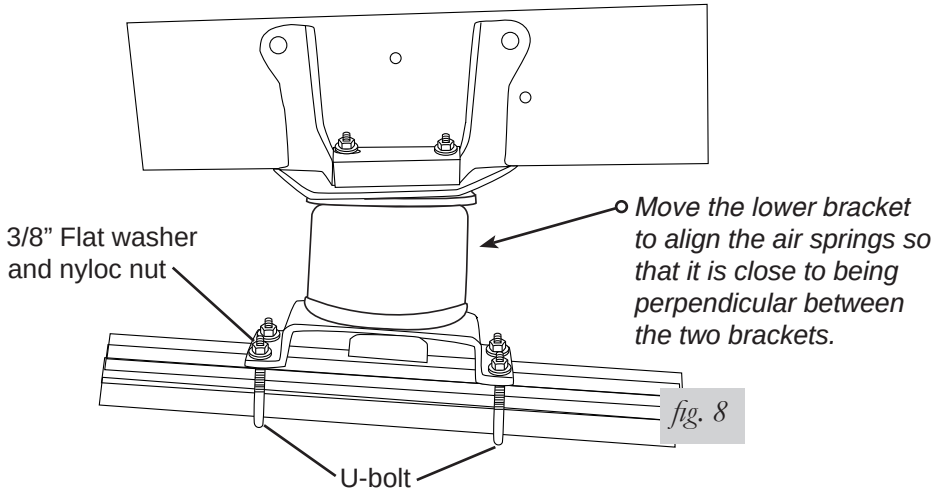


fig. 8

1. Choose a convenient location for mounting the inflation valves. Popular locations for the inflation valve are:
   a. The wheel well flanges.
   b. License plate recess in bumper.
   c. Under the gas cap access door.
   d. Through license plate itself.

NOTE *What ever the chosen location is, make sure there is enough clearance around the inflation valves for an air chuck.*

2. Drill a 5/16” hole to install the inflation valves.

3. Cut the air line assembly in two equal lengths.

⚠ CAUTION

WHEN CUTTING OR TRIMMING THE AIR LINE, USE A HOSE CUTTER, A RAZOR BLADE OR A SHARP KNIFE. A CLEAN, SQUARE CUT WILL ENSURE AGAINST LEAKS. DO NOT USE WIRE CUTTERS OR SCISSORS TO CUT THE AIR LINE. THESE TOOLS MAY FLATTEN OR CRIMP THE AIR LINE, CAUSING IT TO LEAK AROUND THE O-RING SEAL INSIDE THE ELBOW FITTING (FIG. 9)

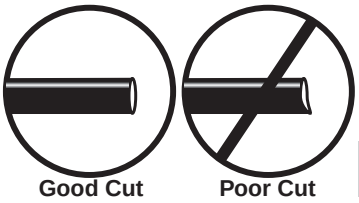


fig. 9

4. Place a 5/16” nut and a star washer on the air valve. Leave enough of the inflation valve in front of the nut to extend through the hole and have room for the rubber washer, flat washer, and 5/16” nut and cap. There should be enough valve exposed after installation - approximately ½” - to easily apply a pressure gauge or an air chuck (fig. 10).
5. Push the inflation valve through the hole and use the rubber washer, flat washer, and another 5/16” nut. Tighten the nuts to secure the assembly in place (fig. 10).
6. Route the air line along the frame to the air fitting on the air spring (fig. 11). Keep AT LEAST 6” of clearance between the air line and heat sources, such as the exhaust pipes, muffler, or catalytic converter. Avoid sharp bends and edges. Use the plastic tie straps to secure the air line to fixed, non-moving points along the chassis. Be sure that the tie straps are tight, but do not pinch the air line. Leave at least 2” of slack to allow for any movement that might pull on the air line.

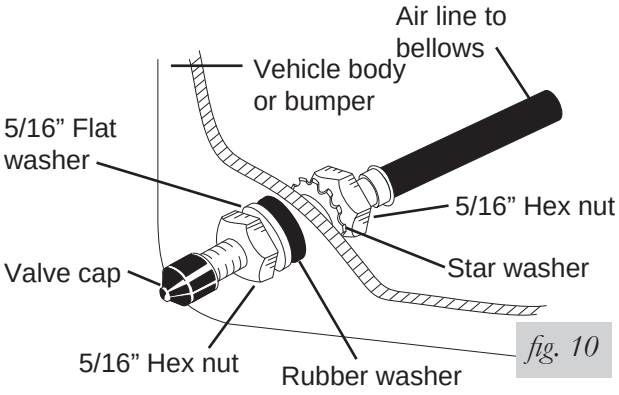


fig. 10




fig. 11

7. Cut off air line leaving approximately 12” of extra air line. A clean square cut will ensure against leaks (see fig. 9). Insert the air line into the air fitting. This is a push to connect fitting. Simply push the air line into the 90° swivel fitting until it bottoms out (9/16” of air line should be in the fitting).

CHECKING FOR LEAKS

1. Inflate the air spring to 30 p.s.i. and spray all connections and the inflation valves with a solution of 1/5 liquid dish soap and 4/5 water to check for leaks. Spot leaks easily by looking for bubbles in the soapy water.
2. After the test, deflate the springs to the minimum pressure required to restore the normal ride height, no less than 5 p.s.i.
3. Check the air pressure again after 24 hours. A 2-4 p.s.i. loss after initial installation is normal. Retest for leaks if the loss is more than 5 lbs.

FIXING LEAKS

1. If there is a problem with the swivel fitting:
   a. Check the air line connection by deflating the spring and removing the line by pulling the collar against the fitting and pulling firmly on the air line. Trim 1” off the end of the air line. Be sure the cut is clean and square (see fig. 9). Reinsert the air line into the push-to-connect fitting.
   b. Check the threaded connection by tightening the swivel fitting another ½ turn. If it still leaks, deflate the air spring, remove the fitting, and re-coat the threads with thread sealant. Reinstall by hand tightening as much as possible, then use a wrench for an additional two turns.
2. If there is a problem with the inflation valve, then:
   a. Check the valve core by tightening it with a valve core tool.
   b. Check the air line connection by removing the air line from the barbed type fitting.

⚠ CAUTION DO NOT CUT THE AIR LINE COMPLETELY OFF AS THIS WILL NICK THE BARB AND RENDER THE FITTING USELESS.

3. If the preceding steps have not resolved the problem, call Air Lift customer service at (800) 248-0892 for assistance.

Before Operating

INSTALLATION CHECKLIST (To be completed by installer)

- ❑ Clearance test — Inflate the air springs to 60 PSI and ensure there is at least ½" clearance around each bellow, away from anything that might rub against them. Be sure to check the tire, brake drum, frame, shock absorbers and brake cables.
- ❑ Leak test before road test — Inflate the air springs to 60 PSI, check all connections for leaks with a soapy water solution. See page 12 for tips on how to spot leaks. All leaks must be eliminated before the vehicle is road tested.
- ❑ Heat test — Be sure there is sufficient clearance from any heat sources — at least 6" for air springs and air lines. If a heat shield was included in the kit, install it. If there is no heat shield, but one is required, call (800) 248-0892.
- ❑ Fastener test — Recheck all bolts for proper torque. Axle clamp bar carriage bolt lock nuts should be torqued to 16 ft/lbs. Re-torque after 100 miles.
- ❑ Road test — The vehicle should be road tested after the preceding tests. Inflate the air springs to 25 PSI (50 PSI if the vehicle is loaded). Drive the vehicle 10 miles and recheck for clearance, loose fasteners and air leaks.
- ❑ Operating instructions — If professionally installed, the installer should review the Product Use, Maintenance and Servicing section on page 14 with the owner. Be sure to provide the owner with all of the paperwork which came with the kit.

Technician's Signature _____

Date _____

POST-INSTALLATION CHECKLIST

- ❑ Overnight leak down test — Recheck air pressure after the vehicle has been used for 24 hours. If the pressure has dropped more than 5 PSI, then there is a leak that must be fixed. Either fix the leak yourself or return to the installer for service.
- ❑ Air pressure requirements — Regardless of load, the air pressure should always be adjusted to maintain ride height at all times.
- ❑ Thirty day or 500 mile test —Recheck the air spring system after 30 days or 500 miles, whichever comes first. If any part shows signs of rubbing or abrasion, the source should be identified and moved, if possible. If it is not possible to relocate the cause of the abrasion, the air spring may need to be remounted. If professionally installed, the installer should be consulted. Check all fasteners for tightness.

Product Use, Maintenance and Servicing

Minimum Recommended Pressure	Maximum Air Pressure
5 PSI	100 PSI

MAINTENANCE GUIDELINES

NOTE

By following the steps below, vehicle owners will obtain the longest life and best results from their air springs.

1. Check the air pressure weekly.
2. Always maintain normal ride height. Never inflate beyond 100 PSI.
3. If you develop an air leak in the system, use a soapy water solution (1/5 liquid dish soap and 4/5 water) to check all air line connections and the inflation valve core before deflating and removing the air spring.

⚠ CAUTION

FOR YOUR SAFETY AND TO PREVENT POSSIBLE DAMAGE TO YOUR VEHICLE, DO NOT EXCEED MAXIMUM GROSS VEHICLE WEIGHT RATING (GVWR), AS INDICATED BY THE VEHICLE MANUFACTURER. ALTHOUGH YOUR AIR SPRINGS ARE RATED AT A MAXIMUM INFLATION PRESSURE OF 100 P.S.I., THE AIR PRESSURE ACTUALLY NEEDED IS DEPENDANT ON YOUR LOAD AND GVWR.

4. Loaded vehicles require at least 25 PSI or more. A “loaded vehicle” refers to a vehicle with a heavy bed load, a trailer, or both. As discussed above, never exceed GVWR, regardless of air spring, air pressure, or other load assist. The springs in this kit will support approximately 40 lbs. of load (combined on both springs) for each 1 PSI of pressure. The required air pressure will vary depending on the state of the original suspension. Operating the vehicle below the minimum air spring pressure will void the Air Lift warranty.
5. When increasing load, always adjust the air pressure to maintain the normal ride height. Increase or decrease pressure from the system as necessary to attain normal ride height for optimal ride and handling. Remember that loads carried behind the axle (including tongue loads) require more leveling force (pressure) than those carried directly over the axle.
6. Always add air to springs in small quantities, checking the pressure frequently.
7. Should it become necessary to raise the vehicle by the frame, make sure the system is at minimum pressure (5 PSI) to reduce the tension on the suspension/brake components. Use of on board leveling systems do not require deflation or disconnection.
8. Periodically check the air spring system fasteners for tightness. Also, check the air springs for any signs of rubbing. Realign if necessary.
9. On occasion, give the air springs a hard spray with a garden hose in order to remove mud, sand, gravel or other abrasive debris.

TROUBLESHOOTING GUIDELINES

1. Leak test the air line connections, the threaded connection into the air spring, and all fittings in the control system.
2. Inspect the air lines to be sure none are pinched. Tie straps may be too tight. Loosen or replace the strap and replace leaking components.
3. Inspect the air line for holes and cracks. Replace as needed.
4. Look for a kink or fold in the air line. Reroute as needed.

If the preceding steps do not solve the problem, it is possibly caused by a failed air spring — either a factory defect or an operating problem. Please call Air Lift at (800) 248-0892 for assistance.

FREQUENTLY ASKED QUESTIONS

Q. Will installing air springs increase the weight ratings of a vehicle?

No. Adding air springs will not change the weight ratings (GAWR, GCWR and/or GVWR) of a vehicle. Exceeding the GVWR is dangerous and voids the Air Lift warranty.

Q. Is it necessary to keep air in the air springs at all times and how much pressure will they need?

For LoadLifter 5000 Ultimate, the recommended minimum air pressure is 5 PSI, but it can safely be run at zero air pressure.

Q. Is it necessary to add a compressor system to the air springs?

No. Air pressure can be adjusted with any type of compressor as long as it can produce sufficient pressure to service the springs. Even a bicycle tire pump can be used, but it's a lot of work.

Q. How long should air springs last?

If the air springs are properly installed and maintained they can last indefinitely.

Q. Will raising the vehicle on a hoist for service work damage the air springs?

No. The vehicle can be lifted on a hoist for short-term service work such as tire rotation or oil changes. However, if the vehicle will be on the hoist for a prolonged period of time, support the axle with jack stands in order to take the tension off of the air springs.

TUNING THE AIR PRESSURE

Pressure determination comes down to three things — level vehicle, ride comfort, and stability.

1. **Level vehicle**


   If the vehicle's headlights are shining into the trees or the vehicle is leaning to one side, then it is not level (fig. 2.1). Raise the air pressure to correct either of these problems and level the vehicle.

2. **Ride comfort**

   If the vehicle has a rough or harsh ride it may be due to either too much pressure or not enough (fig. 2.2). Try different pressures to determine the best ride comfort.

3. **Stability**


   Stability translates into safety and should be the priority, meaning the driver may need to sacrifice a perfectly level and comfortable ride. Stability issues include roll control, bounce, dive during braking and sponginess (fig. 2.3). Tuning out these problems usually requires an increase in pressure.

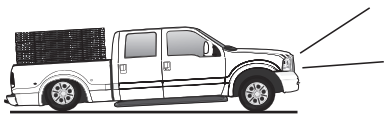

Bad headlight aim *fig. 2.1*




Rough ride *fig. 2.2*




Sway and body roll *fig. 2.3*

GUIDELINES FOR ADDING AIR


1. Start with the vehicle level or slightly above.
2. When in doubt, always add air.
3. If the front of the vehicle dives while braking, increase the pressure in the front air bags, if equipped.
4. If it is ever suspected that the air bags have bottomed out, increase the pressure (fig. 2.4).
5. Adjust the pressure up and down to find the best ride.
6. If the vehicle rocks and rolls, adjust the air pressure to reduce movement.
7. It may be necessary to maintain different pressures on each side of the vehicle. Loads such as water, fuel, and appliances will cause the vehicle to be heavier on one side (fig. 2.5). As much as a 50 PSI difference is not uncommon.



Bottoming out *fig. 2.4*



Unlevel



Level *fig. 2.5*

Choosing the Right On-Board Air Compressor System

60 DAY NO QUESTIONS ASKED, MONEY-BACK GUARANTEE

TWO YEAR COMPRESSOR SYSTEM WARRANTY

Add an on-board air compressor sytem to inflate and deflate your air springs with the touch of a button — from inside or outside of the vehicle.


- For convenient, on-the-go control of your air springs, add an Air Lift on-board air compressor system.
- Air Lift on-board air compressor systems eliminate the search for gas stations that have a working compressor, saving you time, energy and money.
- All systems include a compressor, controller and all parts needed for easy installation.

1. **Choose single or dual path inflation (see illustrations at right)**


2. **Choose wireless or analog control**
   - **Wireless:** Control your air springs from inside or outside the vehicle. Easiest installation - no wires to the cab.
   - **Analog:** In-cab control of your air springs. Economically priced.

3. **Choose heavy or standard duty compressor**
   - **Standard duty:** A standard duty compressor will work well for most customers who use their system on an intermittent basis.
   - **Heavy duty:** For daily use, consider the heavy duty compressor - it inflates faster and more quietly than the standard compressor.

Visit **www.airliftcompany.com** for more detailed info on compressor systems.

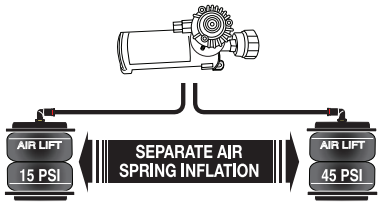

Dual path systems *Air springs are controlled separately to allow for different air pressure from side-to-side. Perfect for uneven or top-heavy loads.*

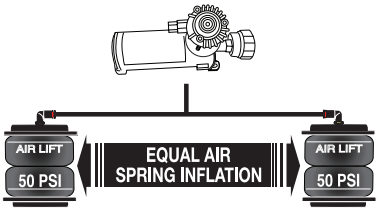

Single path systems *Two springs will inflate at the same time. Good for loads that are evenly distributed from left-to-right or front-to-back.*

	WIRELESS	ANALOG
DUAL PATH	***WirelessAIR***™ OUR PREMIUM SYSTEM! • Easy installation • Includes heavy duty compressor  ***P/N 72000***	***LoadCONTROLLER***™ ***Dual*** Compact, economically priced control.  ***P/N Standard Duty Compressor 25850; P/N Heavy Duty mpressor 25854***
SINGLE PATH	***WirelessONE***™ • Easy installation • Includes standard duty compressor  ***P/N 25870***	***LoadCONTROLLER***™ ***Single*** Compact, economically priced control.  ***P/N Standard Duty Compressor 25852; P/N Heavy Duty Compressor 25856***

Warranty and Returns Policy

Air Lift Company warrants its products, for the time periods listed below, to the original retail purchaser against manufacturing defects when used on catalog-listed applications on cars, vans, light trucks and motorhomes under normal operating conditions for as long as Air Lift manufactures the product. The warranty does not apply to products that have been improperly applied, improperly installed, used in racing or off-road applications, used for commercial purposes, or which have not been maintained in accordance with installation instructions furnished with all products. The consumer will be responsible for removing (labor charges) the defective product from the vehicle and returning it, transportation costs prepaid, to the dealer from which it was purchased or to Air Lift Company for verification.

Air Lift will repair or replace, at its option, defective products or components. A minimum $10.00 shipping and handling charge will apply to all warranty claims. Before returning any defective product, you must call Air Lift at (800) 248-0892 in the U.S. and Canada (elsewhere, (517) 322-2144) for a Returned Materials Authorization (RMA) number. Returns to Air Lift can be sent to: Air Lift Company • 2727 Snow Road • Lansing, MI • 48917.

Product failures resulting from abnormal use or misuse are excluded from this warranty. The loss of use of the product, loss of time, inconvenience, commercial loss or consequential damages is not covered. The consumer is responsible for installation/reinstallation (labor charges) of the product. Air Lift Company reserves the right to change the design of any product without assuming any obligation to modify any product previously manufactured.

This warranty gives you specific legal rights and you may also have other rights that vary from state-to-state. Some states do not allow limitations on how long an implied warranty lasts or allow the exclusion or limitation of incidental or consequential damages. The above limitation or exclusion may not apply to you. There are no warranties, expressed or implied including any implied warranties of merchantability and fitness, which extend beyond this warranty period. There are no warranties that extend beyond the description on the face hereof. Seller disclaims the implied warranty of merchantability. (Dated proof of purchase required.)

Air Lift 1000	**Lifetime Limited**	**LoadController/Dual**	**2 Year Limited**
RideControl	**Lifetime Limited**	**Load Controller (I)**	**2 Year Limited**
LoadLifter 5000*	**Lifetime Limited**	**Load Controller (II)**	**2 Year Limited**
LoadLifter 5000 Ultimate	**Lifetime Limited**	**SmartAir**	**2 Year Limited**
SlamAir	**Lifetime Limited**	**Wireless AIR**	**2 Year Limited**
AirCell	**Lifetime Limited**	**WirelessONE**	**2 Year Limited**
Air Lift Performance**	**1 Year Limited**	**Other Accessories**	**2 Year Limited**
LoadController/Single	**2 Year Limited**		

**formerly SuperDuty*
***formerly LifeSTYLE & Performance and EasyStreet*

Replacement Information

If you need replacement parts, contact the local dealer or call Air Lift customer service at (800) 248-0892. Most parts are immediately available and can be shipped the same day.

Contact Air Lift Company customer service at (800) 248-0892, first if:

- Parts are missing from the kit.
- Need technical assistance on installation or operation.
- Broken or defective parts in the kit.
- Wrong parts in the kit.
- Have a warranty claim or question.

Contact the retailer where the kit was purchased:

- If it is necessary to return or exchange the kit for any reason.
- If there is a problem with shipping if shipped from the retailer.
- If there is a problem with the price.

Contact Information

If you have any questions, comments or need technical assistance, contact our customer service department by calling (800) 248-0892, Monday through Friday. For calls from outside the USA or Canada, our local number is (517) 322-2144.

For inquiries by mail, our address is PO Box 80167, Lansing, MI 48908-0167. Our shipping address for returns is 2727 Snow Road, Lansing, MI 48917.

You may also contact us anytime by e-mail at sales@airliftcompany.com or on the web at www.airliftcompany.com.

Notes

Need Help?

Contact our customer service department by calling (800) 248-0892, Monday through Friday. For calls from outside the USA or Canada, our local number is (517) 322-2144.

Register your warranty online at www.airliftcompany.com/warranty

Thank you for purchasing Air Lift products — the professional installer's choice!

Air Lift Company • 2727 Snow Road • Lansing, MI 48917 or PO Box 80167 • Lansing, MI 48908-0167
Toll Free (800) 248-0892 • Local (517) 322-2144 • Fax (517) 322-0240 • www.airliftcompany.com

Printed in
the USA