


Pro Street-S | INSTALLATION INSTRUCTIONS

Eibach Springs, Inc. | 256 Mariah Circle | Corona | California 92879-1751 | USA
T +1 951-256-8300
www.eibach.com



92-00 Honda Civic 2/4 door, 99-00 Civic Si, 93-97 Del Sol, 94-01 Acura Integra DC2/4, Exc. Type-R
PART NUMBER 4017.711

PARTS & HARDWARE LIST					
	Part Number	Description	Qty	Part Number	Description Qty
A	4017.8100	DAMPER ASSY FRONT	2		
B	4017.8200	DAMPER ASSY REAR	2		
C	PDK4.TOOL	4mm ADJUSTMENT TOOL	1		
D	PDK6.TOOL	6mm ADJUSTMENT TOOL	1		
E	4018.8200HKR	HARDWARE KIT, (NOT SHOWN)	1		

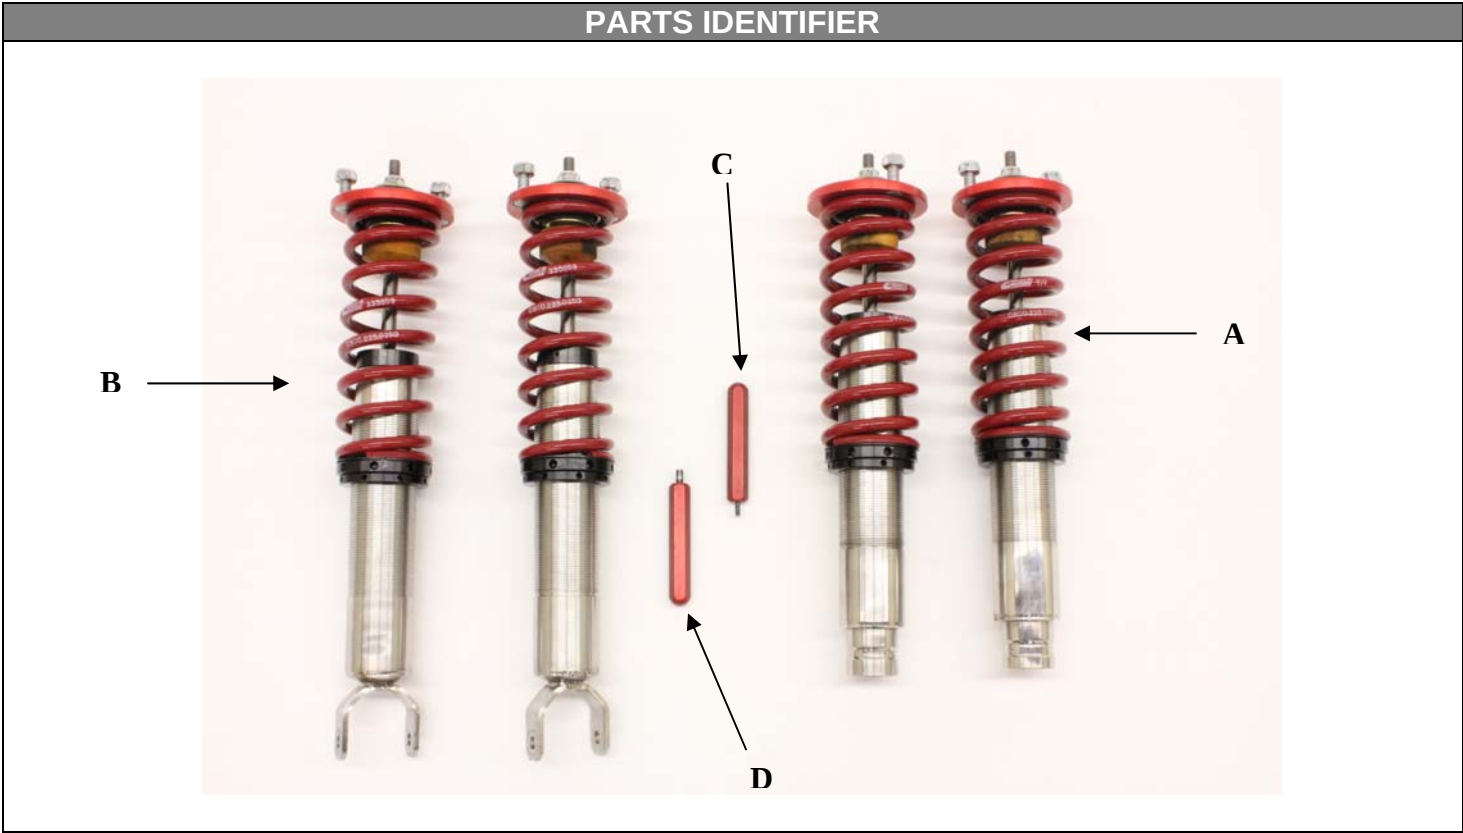

NOTES: Read All Instructions Before Beginning Installation

- **Installation of a Eibach Pro Street S Coil-Over** set should only be performed by a qualified mechanic experienced in the installation and removal of suspension components.
- **Use of a hoist** is highly recommended and will substantially reduce installation time.
- **Never work on or under a vehicle** unless it is properly supported by safety stands and wheels are blocked.
- **Never use impact wrenches** or guns to install or remove shock absorber piston components, shafts and piston rod nuts.
- **After installation**, it is always important to inspect and adjust the following if necessary:
 - Wheel alignment such as camber, caster & toe.
 - Tire and/or wheel fender clearance.
 - Brake line clearance and attachments.
 - Brake anti-locking and anti-skid system sensors.
- **Alignment:** After installation, you will need a full vehicle alignment to ensure proper tire wear and performance.
- **Height Adjustment** – Should be performed with the wheels completely off the ground and with the springs fully unloaded.