

Input Voltage	Beam Wattage/ Lumen Rating	White Halo Specs	Amber Halo Specs
10-30V DC	18 Watts 1720lm	4.2 Watts 450lm	4.2 Watts 400lm

Warranty and Disclaimer

Within One year after the purchase date, the original buyer may return any XKGLOW product that has failed due to a defect in materials or workmanship. Fog light assemblies that have one or more LEDs fail to illuminate due to a defect in materials or workmanship are covered with a one year warranty for **the original buyer.**

Installation of this product must be performed by a licensed professional. Should the failure of the product be the result of damage occurring as a result of improper installation, alteration of the product or an act or omission on the part of the consumer, this warranty is void. XKGLOW Lighting shall not be responsible for any consequential damages which arise from the use and/or installation of the product. If the kit is installed in any manner other than specified, XKGLOW Lighting reserves the right to deny any warranty claims at the discretion of the technical support department. Any product return must include the original packaging, invoice number and a statement of the alleged defect. Upon receipt of the returned product, the company will test the product for defect. If the results of the testing do not support the warranty claim, do not reveal any defect or indicate consumer negligence in the installation and handling of the product, then the product will be returned to you and you will be charged a reshipping fee. If the product is returned from an address within the continental United States, within the first 30 days after purchase, and is found to be defective, XKGLOW Lighting will exchange or refund the original purchase expense. This offer does not extend to the cost for shipping charges on any international packages.

Additional Disclaimer Terms

Please check your local and state laws for the proper use of this product.

- Improper installation of electrical products such as lighting may cause damage to any vehicle or device to which the improperly handled or installed lighting is attached.
- Improperly installed product may cause electrical injury to persons.
- It is recommended that the kit should be installed by a licensed professional.
- XKGLOW assumes no liability for the installation of the product.
- Warranty or liability will not exceed the product purchase price, which shall be buyer's sole and exclusive remedy.


Return/Exchange Procedure

1. Email [xk@xkglow.com] to notify us of the product issue as well as the item number and name of customer on invoice.
2. We will send you the trouble-shooting guide to fix the issue, or to narrow down which of the component(s) need to be replaced. If the issue still exists, we will ask you to send back the defective items to be replaced.
3. Please send the returned item as instructed, along with claims and a telephone number where you can be reached.
4. After the returned item(s) have been accepted and inspected, we will issue a refund or replace the items ASAP. For refunds, item(s) must be sent to XKGLOW within 14 days from date of purchase. Original shipping charges are not refundable.




We always stand behind our products and are committed to our customers! For questions you may have, please contact xk@xkglow.com. We normally respond within 24 hours. (Monday-Friday).

Mounting Instructions

1. **Test all components before mounting:** As shown below, plug ALL units together and power on for testing. If the lights show any defects, please contact us and we will be happy to replace them for you.

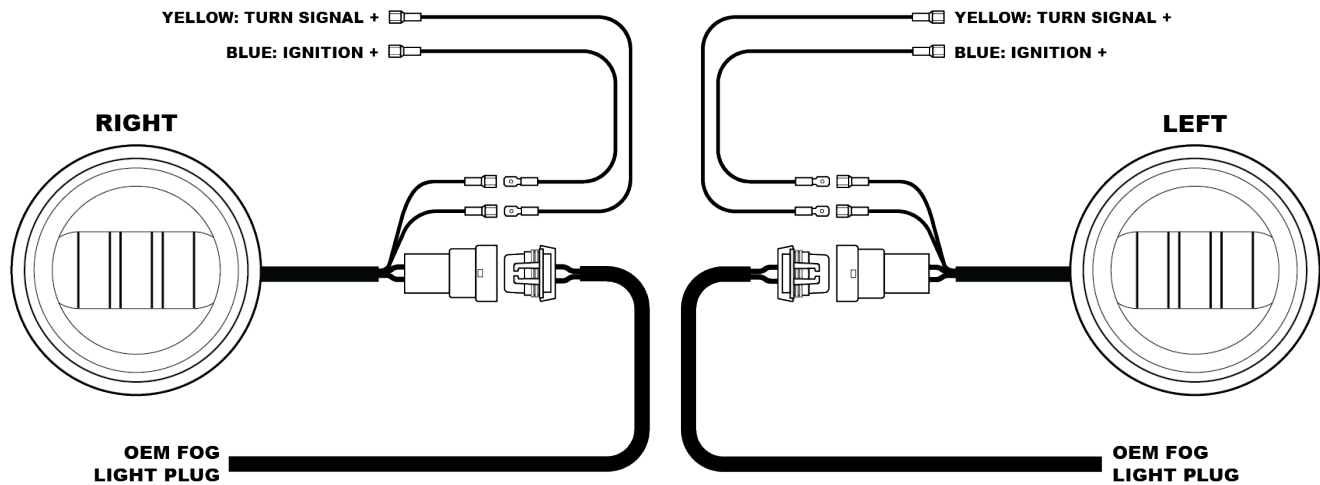

2. **Remove the grill:** Pop the hood to gain access to the top of the grill. The grill is secured by several pop tabs. Remove the pop tabs and pull the grill towards the front of the vehicle for removal. Unplug the turn signal bulbs.
3. **Remove the factory fog lights:** Starting from the underside of the vehicle, remove the front skid plate to gain access to the back of the fog lights. Unplug the stock fog light bulbs, remove the hardware holding the housings in place, and remove the fog lights from the vehicle.
4. **Install the new XKGLOW LED fog lights:** Now that the factory fog lights are removed, it's time to install the XKGLOW LED fog lights. Using the existing hardware, secure the new fog lights into place. Please note orientation during install for a correct beam pattern. Plug the 2-pin plug into the OEM fog light plug.
5. **Tap into ignition wire:** The blue wire coming from the fog lights will control the white on the halos. Tap the blue wire into a desired 12V source. *Example- if you would like halos to turn on with the running lights, tap into the positive running light wire.*
6. **Tap into the + turn signal wire:** The white halo in each of the XKGLOW LED fog lights will also function as turn signals. Please check service manual specific to your make and model to verify positive turn signal wires. Take the included T-tap connector and secure it on the positive turn signal wire following the diagram below. Put the wire in the groove of the T-tap connector, shut it, and use pliers to lock the tab into place. Take the corresponding side's yellow wire coming from the halo driver plug and slide it over the T-tap connector to lock it in place. Secure any loose wiring.

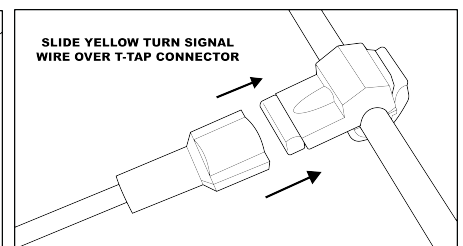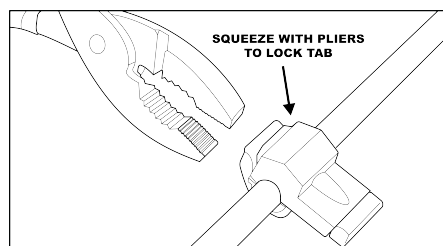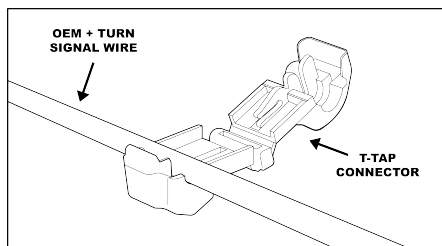

7. **Power vehicle on to check install:** Power on the vehicle and test all functions to verify proper install.