Instructions for KC #75052 Grille and C20 20" LED bar for Toyota Tundra 2010 - 13

Thanks for choosing a KC HiLiTES product. We take pride in building the highest quality, best engineered systems possible. Your satisfaction with our product is important, so if you have any questions, please call our customer service line at 800-528-0950. **For warranty information, visit our website at www.kchilites.com.**

PLEASE READ

- ***KC HiLiTES strongly recommends professional automotive & aftermarket accessory knowledge for proper installation of this grill.***
- ***You will be cutting the factory grill, returning back to stock may not be possible once completed.***

Stock Grille

STEP 1 - Open hood and remove the two 10mm screws that hold the hood release latch to the grille

STEP 2 - Cut out the grille center bars leaving about 1/2" border on all sides. **NOTE - Do not cut the black plastic completely out as the grille needs to sit against this.**

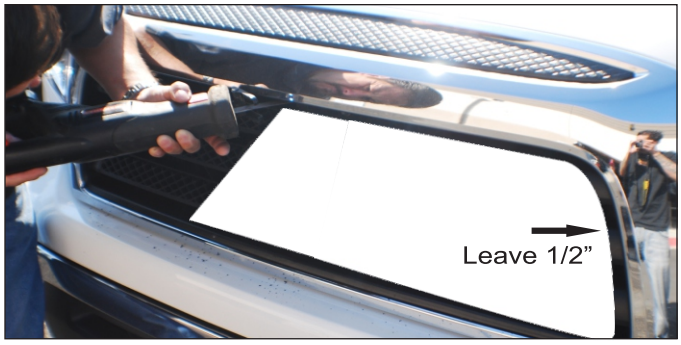

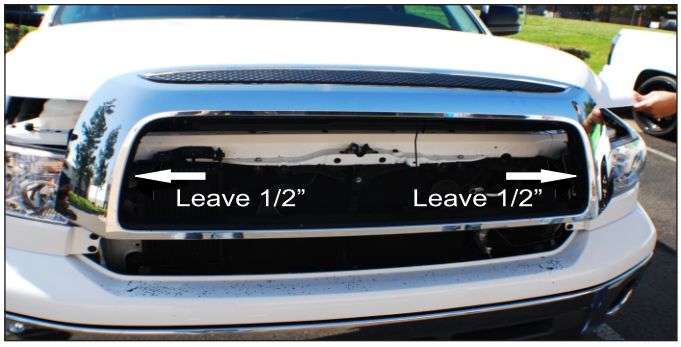

STEP 3 - *Before installing the new grille, install the LED bar and tighten securely. Ensure the LED cable is fed to a location that can easily be reached for connecting to the harness after the grille is in place.* Lay new grille in opening of the grille shell. Press grille against shell and screw the supplied #8 screws through each of the six brackets, through the grille shell and into the spring nuts. Re-attach the hood latch to the bracket on the new grille.

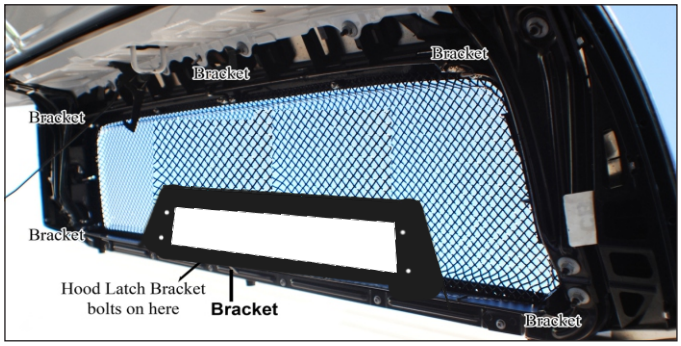

STEP 4 - Wire your LED light bar according to the instructions included with the light.

Depending vehicle manufacture date (Month/year), it may require some cutting for light bar clearance