

54601

03-09 LEXUS

GX470



54601

03-09 LEXUS

GX470

03-09 LEXUS GX470

UPPER CLASS SERIES MESH GRILLE

Tools Required:

Phillip Screwdriver (std. & short length)
8mm Socket or Nut Driver
10mm Socket or Nut Driver



Hardware / Parts Included:

1	Upper Class Mesh Grille	6	#10 Flat Washers
2	6-32 x 3/4 Philips Screws	3	6-32 Flat washers
5	6-32 Nylon Nuts		
4	#10 Nylon Nuts		
3	1/2" 6-32 Screws		

Read and understand instructions before attempting installation

Step 1

Remove the nuts holding the grille in place. Remove the clip securing the hood pull rod to the latch. Remove the two factory bolts holding the hood latch (1); separate the grille center from the outer grille shell.

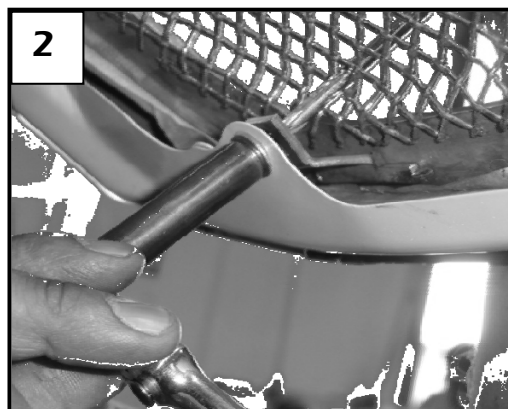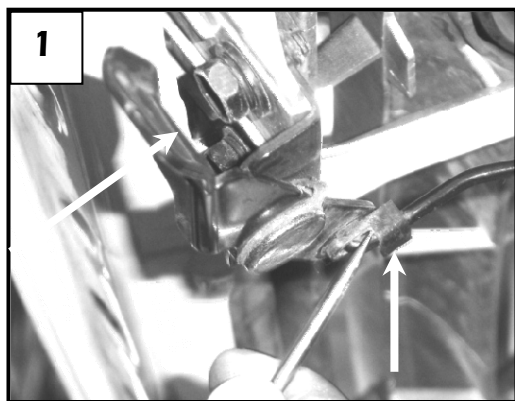

Step 2

Test fit the mesh grille into the factory grille shell. Make sure that the welded studs and brackets match up to factory holes on grille shell; set grille into place. From underside of hood; place a #10 washer and nylon nut on each stud. DO NOT TIGHTEN. Place a #8 screw between grille and bottom brackets. Put a washer and a nylon nut on each (2). Center the grille and tighten.

Step 3

Reinstall the hood latch and rod using step 1. ***Thank you for purchasing a T-Rex Billet Grille.***
1/9/12