

2011-13 INFINITI G37

Mesh Grille

Install time: 30 Mins.

TOOLS REQUIRED:

Socketwrench
Flat Screwdriver
Drill

PARTS LIST:

(1) Mesh Grille (4) Custom L-Brackets
(3) #8 Self Drilling Screws
(8) 6/32 Nylon Lock Nuts
(4) #10 Flatwashers





PLEASE READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION.

Step 1 Factory Removal

- Remove Screws and Clips along the Top of the Plastic Cover. (Fig. 1)
- Slide Forward the Plastic Cover and Lift Up a bit. (Fig. 2)
- There will be Clips that are connected to a black hose, Remove these Clips and Remove the Plastic Cover. (Fig. 3)
- Along the Top and Bottom Corners of the Factory Grille, There will be Nylon Lock Nuts, Remove these from the Grille (5 Total). (Fig. 4)
- There will be Clips on the Upper and Lower part of the Factory Grille, With a Flat Screwdriver carefully Press these Clips while Pushing the Grille Outward and Remove Grille. (Fig. 5)
- Remove the Infiniti Logo from the Factory Grille by Spreading the Clip from the Logo and Remove then place the Logo onto the Logo Plate and with a Drill Thread a #8 Self Drilling Screws onto the brackets with the holes. (Fig. 6)

Step 2 Grille Installation

- Place the Mesh Grille onto the Factory Grille Opening.
 - From Behind the Mesh Grille, Insert a Washer and Nylon Lock Nut onto the Threaded Studs on the Mesh Grille. (Fig. 7)
- Insert an L-Bracket onto the two inner Bottom Threaded Studs so that it Latches onto the Grille Shell and insert a Nylon Lock Nut. (Fig. 8)

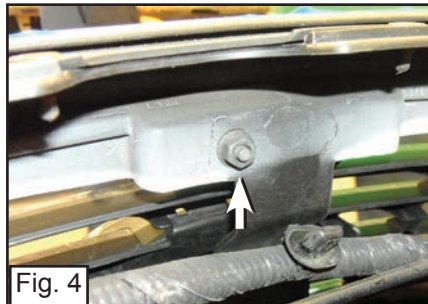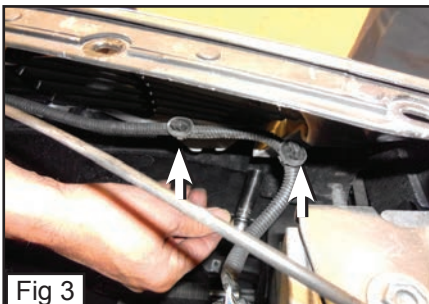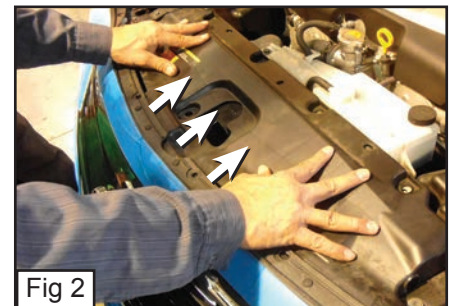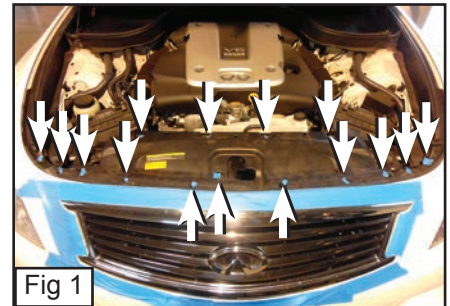

INSTALLATION COMPLETE