



**P/N 12628HKR**

**GM 1967-69 F-Body/1968-72 X-Body LS Swap Powerglide\*/TH350\*/7004R\* Transmission Adapter Kit**

\*Requires the use of a Hooker 12625HKR 4L60-4L75 transmission crossmember

**P/N 12650HKR**

**TH400 / 2004R Transmission Mount Adapter Kit**

**Installation Instructions 199R10685**

Thank you for choosing to use Hooker Blackheart products as part of your engine/transmission swap project. These products are designed as part of the most comprehensively engineered systems of mounting components, headers, and exhaust systems available for LS engine swaps. Hooker Blackheart LS swap systems are designed to decrease your total swap installation effort and cost while increasing the engineered quality of your vehicle and compatibility of these components with other popular aftermarket components.

**IMPORTANT DESIGN AND PRE-INSTALLATION INFORMATION:**

These components have been designed for use in multiple Hooker Blackheart LS engine swap system applications. They have been CAD designed and FEA validated to provide optimized strength and fitment geometry for each application they are called out to be used with.

Installation of these products requires the use of a **Prothane™ 7-1604** poly mount, or an **Anchor™ 2268** rubber transmission mount for as-designed installation geometry to be achieved.

Use of the 12628HKR adapter kit with a 12625HKR 4L60-4L70 crossmember to install a Powerglide, TH350 or 700R4 transmission into an LS swapped GM 1<sup>st</sup>-gen F-body/3<sup>rd</sup>-gen F-body (using Hooker Blackheart 12618HKR LS swap engine brackets only) requires modifications (cutting and welding) be performed on the 12625HKR crossmember to complete the installation. The increased exhaust passage and ground clearance gained by using the 12625HKR crossmember as part of your LS swap project will more than justify the extra effort required for this operation.

Use of the 12650HKR spacer block kit with a 12626HKR T56 crossmember to install a 2004R transmission into an LS swapped GM 1<sup>st</sup>-gen F-body/3<sup>rd</sup>-gen X-body (using Hooker Blackheart 12618HKR LS swap engine brackets only) requires slight modification/welding to be done to the 12626HKR crossmember to fit around the case and pan of a 2004R transmission. The steel gusset bracket included within the 12650HKR kit is intended for this purpose and its use is outlined in these instructions. The increased exhaust passage and ground clearance gained by using the 12626HKR crossmember as part of your LS swap project will more than justify the extra effort required for this operation.

Use of the 12650HKR spacer block kit with any other Hooker Blackheart transmission crossmember to install a 2004R or TH400 transmission will not require any modifications to be done to the crossmember, or the use of the steel gusset bracket included in the 12650HKR adapter kit. Discard the gusset bracket in such cases.

These instructions are intended to supplement the basic installation steps outlined in various Hooker Blackheart transmission crossmember instruction sheets that call out the use of these parts. The drawings below can be seen in color by going to [www.holley.com](http://www.holley.com) and searching for either 12628HKR or 12650HKR.

**INSTALLATION OF 12628HKR**


1. Check that the hardware package includes the following:

| Qty. | Description              | Qty. | Description |
|------|--------------------------|------|-------------|
| 1    | Adapter Bracket Assembly | 2    | 7/16" Nuts  |
| 2    | 7/16" Bolts              |      |             |


If any are missing, please contact Technical Service at 1-866-464-6553 or 270-781-9741.

2. Cut a notch as wide as the 12628HKR bracket into the front of the 12625HKR crossmember. Place the notch in the center of the crossmember and cut it back 1-1/8" from the face of the crossbeam front flange (**Figure 1**).
3. Attach the bracket to the crossmember placing the supplied bolts and nuts in the holes that pass through both the bracket and crossmember (**Figure 2**).
4. If you are using this kit to install a 700R4 transmission, trim the front of the bracket off so that it is even with the front edge of the bracket gusset plate (**Figure 2**) and slightly notch the top edges of the upright crossmember gussets to clear the isolator mount base plate (**Figure 3**). If you are using this kit to install a Powerglide or TH350, leave the bracket length as-is, as you will be attaching the transmission mount to the forward set of holes in the bracket.
5. Once notching/clearancing is complete, clean parts and weld them together using either a MIG or TIG welder (**Figure 2**) and spot-paint as desired to match.


6. Install the crossmember per the instructions contained in its packaging.

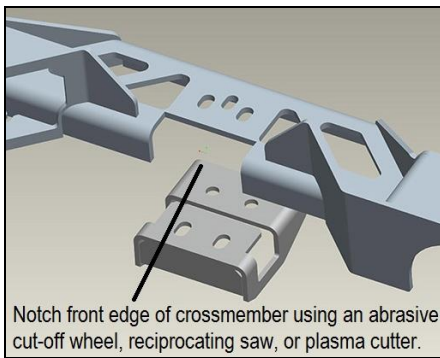

**Figure 1**

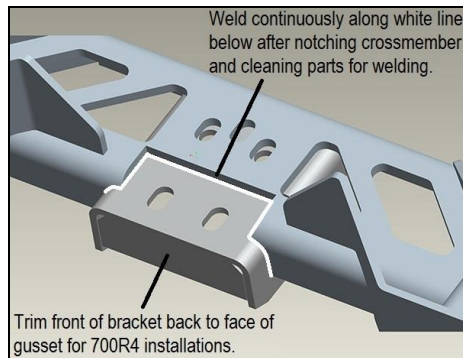

**Figure 2**

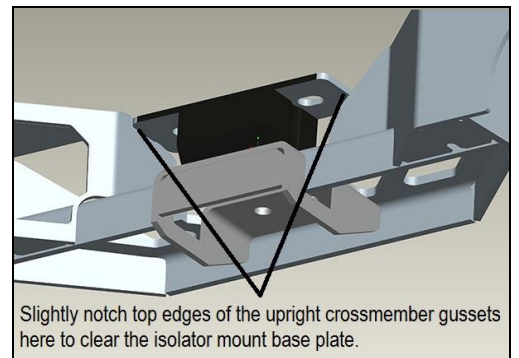

**Figure 3**


## **INSTALLATION OF 12650HKR**

1. Check that the hardware package includes the following:


| Qty. | Description           | Qty. | Description   |
|------|-----------------------|------|---------------|
| 1    | Aluminum Spacer Block | 2    | 7/16" Bolts   |
| 1    | Steel Gusset Bracket  | 2    | 7/16" Washers |

If any are missing, please contact Technical Service at 1-866-464-6553 or 270-781-9741.


2. If you are using this spacer block kit to install a 2004R into a GM 1<sup>st</sup>-gen F-body or 3<sup>rd</sup>-gen X-body using the Hooker Blackheart 12626HKR T56 crossmember, modify/cut the inside left upright wall of the crossmember to match what is shown in **Figures 4 and 5** below. Once modifications are complete, clean parts and weld them together using either a MIG or TIG welder, as indicated in **Figure 6** below and spot-paint as desired to match. Install the crossmember per the instructions contained in its packaging while installing the spacer block included in this kit between the crossmember and transmission isolator. Use the included long fasteners to attach the transmission mount to the crossmember.

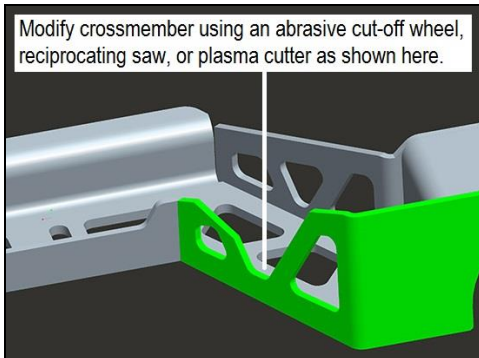

**Figure 4**

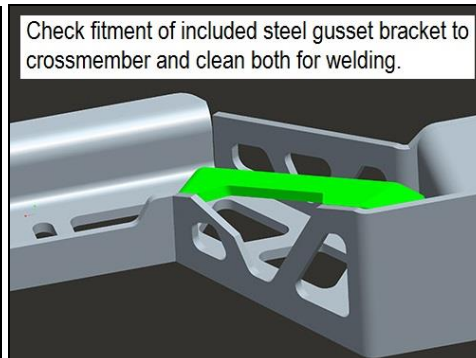

**Figure 5**

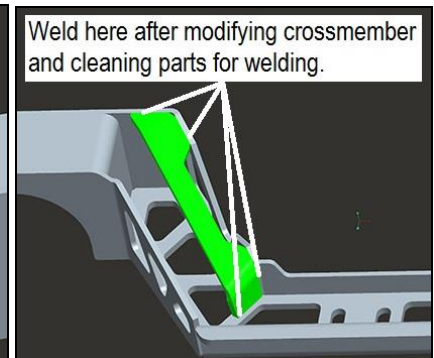

**Figure 6**

3. If you are using this spacer block kit and a Hooker Blackheart transmission crossmember to install a 2004R or TH400 transmission into any other vehicle besides a GM 1<sup>st</sup>-gen F-body or 3<sup>rd</sup>-gen X-body, do not modify the crossmember in any way. Install the crossmember per the instructions contained in its packaging while installing the spacer block included in this kit between the crossmember and transmission mount. Use the included long fasteners to attach the transmission mount to the crossmember. Discard the included gusset bracket as it is not needed in these applications.

Any questions? Please contact Technical Service: 1-866-464-6553 or 270-781-9741. For online help, please refer to: [www.holley.com](http://www.holley.com).

### **LIMITATION OF LIABILITY – DISCLAIMER:**

HOOKE<sup>TM</sup> makes no warranties of merchantability, of fitness for particular purpose, or that its products are approved for general use, or that its products comply with laws, regulations, or ordinances in the state where they may be sold to the ultimate purchaser, the consumer. Unless expressly stated to the contrary in the catalog, instruction sheet; or price list, the entire risk as to the conformity of any company product in any such state and as to repair should the product prove to be defective or non-conforming, is on the retail purchaser, the buyer, the ultimate consumer, of such product and it is not upon the seller, distributor, or manufacturer. In this connection, the retail purchaser, the buyer, the ultimate consumer assumes the burden of the entire cost of any and all necessary service, alterations, or repair.

© 2014 Hooker Headers, Inc. All rights reserved. Tous Droits Réservés.

**199R10685**

**Revision Date: 8-22-18**



## **1993-2002 GM F-Body LS Swap Engine Mounting Brackets** **3.4/3.8L V6 and LT1/LT4 V8 Equipped Vehicles** **Installation Instructions**



**71221001HKR (V6)**



**71221002HKR (LT1/LT4-V8)**



Thank you for choosing to use Hooker Blackheart engine swap mounting brackets as part of your LS swap project. These mounting brackets are part of the most comprehensively engineered system of mounting components, headers and exhaust systems available for this application. Please read these instructions thoroughly before attempting installation.

### **PRE-INSTALLATION CONSIDERATIONS:**

Installation of these engine mounting brackets requires the use of 1998-2002 GM Camaro/Firebird LS1 engine motor mounts. GM replacement rubber mounts (part number 22179268) or Hooker/Holley polyurethane motor mounts (71221016HKR clamshell housings and 71221016HKR or 71221017HKR inserts) are recommended. Aftermarket poly motor mount inserts from other sources have been found to deviate from factory design specifications and will cause installation issues.

The long horizontally installed through bolts/nuts that couple the engine mounts to the Hooker Blackheart engine brackets are to be user supplied. Stock GM bolts/nuts or the Hooker Blackheart 71223015HKR hardware kit are recommended to be used.

**Installation of these brackets requires removal of the entire engine/cradle/front suspension/transmission assembly from the vehicle and its subsequent replacement. This operation is inherently dangerous and should be only performed by properly skilled individuals using the proper tools and dedicated automotive lifting equipment.**

### **COMPATIBILITY INFORMATION:**

When used with the related Hooker Blackheart **71222001HKR** or **71222002HKR** transmission crossmembers, these engine swap mounting brackets will replicate the factory engine/transmission location and inclination angle used in 1998-2002 LS applications.

These engine swap mounting bracket kits have been developed for compatibility with the Holley® **302-2** and **302-3**, or stock 4<sup>th</sup>-gen F-body LS oil pans. The stock 4<sup>th</sup>-gen F-body accessory drive system is intended to be used in this swap application.

Hooker Blackheart 4<sup>th</sup>-gen F-body LS exhaust components are compatible with these engine brackets under the following guidelines:

- Installation of Hooker Blackheart headers requires the installation of an LS application steering rack and intermediate shaft as well as a front end alignment following the completion of the swap.
- Installation of the Hooker 4<sup>th</sup>-gen dual exhaust system on 1993-97 cars requires installation of a Hooker Blackheart **71223002HKR** notch panel on the driver side floor brace to clear the left inlet tube of the exhaust system.

More LS engine performance components, such as EFI fuel control systems, fuel filters, fuel pumps, plumbing hose/fittings and valve covers can be found at [www.holley.com](http://www.holley.com).

### **INSTALLATION:**

1. Raise, support and lock the vehicle in position.
2. Remove the engine/cradle/suspension/transmission assembly from the vehicle; use the appropriate factory service manual for the specific vehicle you are working on for step-by-step instructions on how to carry out this task and pay close attention to all listed safety precautions.
3. If installing an LS application steering rack on the cradle to provide exhaust header clearance, do so now; use the appropriate factory service manual for the specific vehicle you are working on for step-by-step instructions on how to carry out this task and pay close attention to all listed safety precautions.

4. Remove the engine and transmission from the cradle and set them aside.
5. Remove the existing engine mounting brackets from the cradle and clean the bracket mounting surfaces on the cradle.
6. Using the stock bolts, install the Hooker Blackheart engine brackets onto the cradle, as shown in **Figures 1 and 2** for V6 applications and **Figure 3** for LT1/LT4-V8 applications. The additional base plate holes (**marked B**) can be scribed, drilled and fitted with fasteners, if desired, for higher HP applications. Leaving these holes undrilled will have no effect on the strength/integrity of a typical swap installation.
7. Install new motor mounts on the LS engine to be installed and install the engine/transmission assembly onto the Hooker Blackheart engine brackets; fasten the engine brackets to the mounts using the user-sourced metric cap screws and flanged locking nuts.
8. Reinstall the engine/cradle/suspension/transmission assembly into the vehicle in the reverse order of steps that was used for removal. Attach the rear of the transmission to the vehicle by installing a Hooker Blackheart **71222001HKR or 71222002HKR** transmission crossmember, or a stock model-year appropriate 4<sup>th</sup>-gen T56 or 4L60 transmission crossmember.
9. The LS engine/transmission drivetrain is now mounted and ready for attachment of the exhaust system components.

| Hole Use Legend |                                                                     |
|-----------------|---------------------------------------------------------------------|
| A               | Install bolt in matching factory hole.                              |
| A1              | Install bolt in 3.4L applications – disregard in 3.8L applications. |
| A2              | Install bolt in 3.8L applications – disregard in 3.4L applications  |
| B               | Mark, drill, and install bolt/nut in hole, if desired.              |

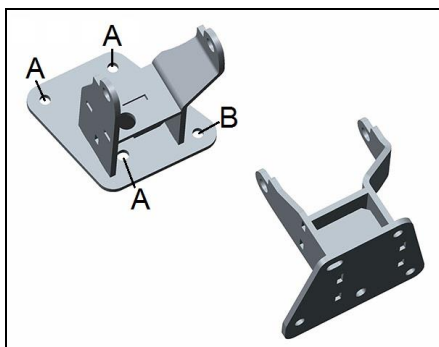


Figure 1 – V6 Driver's Side

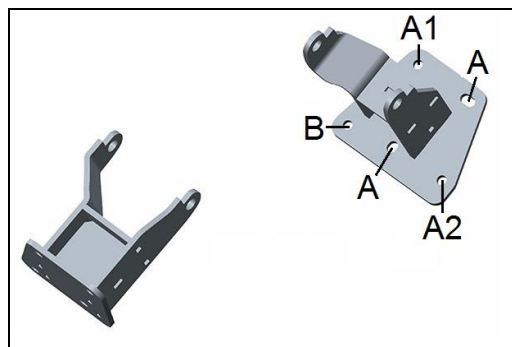


Figure 2 – V6 Passenger's Side

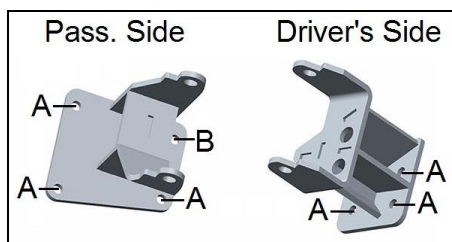


Figure 3 – LT1/LT4-V8

#### **LIMITATION OF LIABILITY – DISCLAIMER:**

HOOKER™ makes no warranties of merchantability, of fitness for particular purpose, or that its products are approved for general use, or that its products comply with laws, regulations, or ordinances in the state where they may be sold to the ultimate purchaser, the consumer.

Unless expressly stated to the contrary in the catalog, instruction sheet; or price list, the entire risk as to the conformity of any company product in any such state and as to repair should the product prove to be defective or non-conforming, is on the retail purchaser, the buyer, the ultimate consumer, of such product and it is not upon the seller, distributor, or manufacturer.

In this connection, the retail purchaser, the buyer, the ultimate consumer assumes the burden of the entire cost of any and all necessary service, alterations, or repair.

© 2015 Hooker Headers, Inc. All rights reserved. Tous Droits Réservés.

**199R10846**

**Revision Date: 6-13-19**



## GM LS/LT Engine Mount Components

### 71221016HKR, 71221017HKR, 71221018HKR, 71221019HKR, 71223015HKR, & 71223016HKR Installation Instructions



71221016HKR



71221019HKR



71223015HKR



71223016HKR

Thank you for choosing to use Hooker Blackheart LS/LT engine mount components as part of your performance vehicle project. These mounts may be used as direct replacement parts on any 1998-02 V8 equipped GM F-body vehicle (with 71221018HKR), or to perform an LT engine swap in a 1998-02 V8 equipped GM F-body vehicle (with 71221019HKR) using the factory frame stands. Additionally, they may be used to mount an LS or LT engine into a GM 1983-93 F-body or 1964-72 A-body vehicle using specific Hooker LS engine swap brackets developed for those applications. Please read these instructions thoroughly before attempting installation.

#### **PRE-INSTALLATION CONSIDERATIONS:**

These components were designed in conjunction with one another to eliminate the rivet-drilling operation typically required to install polyurethane inserts in 1998-2002 GM F-body vehicles.

Hooker Blackheart LS and LT clamshell housings are both stamped from thicker gauge steel than is typically used to manufacture clamshell housings of stock replacement LS engine mounts, which means they provide a stronger mounting foundation for high horsepower applications.

While easy to install, careful attention should be paid to the installation steps within this document to ensure the insert is not installed into the clamshell upside-down or backwards, which would cause in-car installation issues.

#### **COMPATIBILITY INFORMATION:**

Although Hooker Blackheart clamshell housings (LS and LT versions) were CAD designed specifically for use with Hooker Blackheart polyurethane inserts, they will physically accept GM 1998-02 F-body LS polyurethane inserts from Energy Suspension™ and Prothane™ also.

#### **BEFORE BEGINNING...**

Check that the hardware package includes the following:

**71221016HKR-** (1) **black** LS/LT polyurethane insert

**71221017HKR-** (1) **red** LS/LT polyurethane insert

**71221018HKR-** (1) **LS** engine mount clamshell (upper and lower halves), (4) 5/16 bolts, (4) 5/16 washers and (4) 5/16 lock nuts


**71221019HKR-** (1) **LT** engine mount clamshell (upper and lower halves), (4) 5/16 bolts, (4) 5/16 washers and (4) 5/16 lock nuts

**71223015HKR-** (2) M12 x 150mm flanged head, Grade 10.9, LS/LT engine mount/bracket couple-bolts, (2) M12 flanged nuts

**71223016HKR-** (4) 5/16 bolts, (4) 5/16 washers, and (4) 5/16 lock nuts (this is a replacement hardware kit for the fasteners included with the 71221018HKR and 71221019HKR engine mount clamshell kits).


#### **INSTALLATION:**

1. Install the insert between the upper and lower clamshell halves while ensuring that the following conditions of orientation are met:
  - A. The metal tangs protruding from the ends of the insert are offset towards the top of the clamshell halves (the side with a straight edge compared to the slight "V" shaped edge of the bottom side).
  - B. The longer end of the insert protrudes from the right side of the clamshell housing. This is the case with both mounts to be installed on an engine, which means when installed on the engine, the longer end of the inserts will point towards the front of the car on the passenger's side of the engine, and towards the rear of the car on the driver's side of the engine.
2. With the above conditions met, fasten the upper and lower clamshell halves together using the 5/16" hardware included with each clamshell housing. Install the fasteners in the orientation shown in **Figure 1** on the next page (LT clamshell shown, LS clamshell similar).

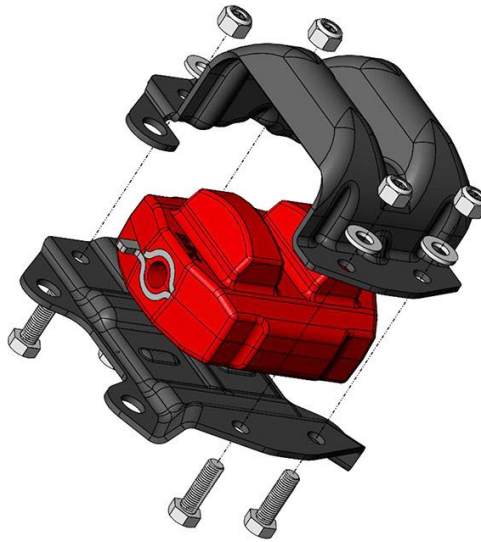

**Figure 1**

3. Ensure the two large holes in the bottom of the upper and lower halves are aligned to allow unobstructed insertion of M10 bolts through each of them and then torque the 5/16 bolt/washer/nut assemblies to approximately 29 ft./lbs.
4. Attach the clamshell/insert assemblies to the intended engine with user-supplied M10 fasteners with the straight edge of the clamshells facing up as depicted in **Figure 2**.

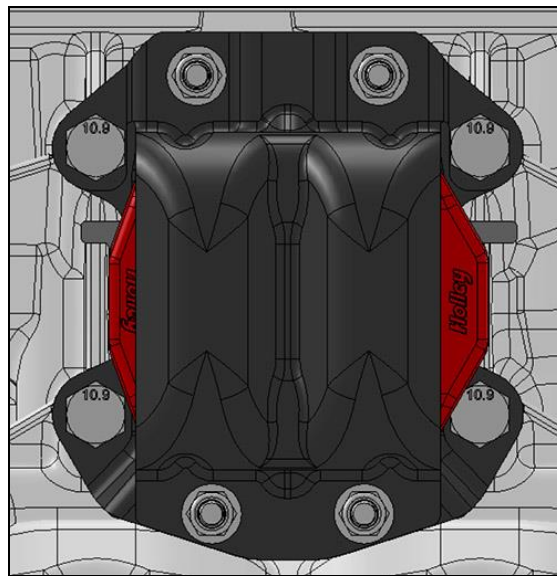

**Figure 2**

5. Lower the engine onto the vehicle engine mounting brackets and couple the engine mounts to the brackets using the M12 bolts and nuts included in the Hooker Blackheart 71223015HKR hardware kit, or with similar fasteners. Tighten bolt/nut assemblies

**LIMITATION OF LIABILITY – DISCLAIMER:**

HOLLEY/HOOKER™ makes no warranties of merchantability, of fitness for particular purpose, or that its products are approved for general use, or that its products comply with laws, regulations, or ordinances in the state where they may be sold to the ultimate purchaser, the consumer.

Unless expressly stated to the contrary in the catalog, instruction sheet; or price list, the entire risk as to the conformity of any company product in any such state and as to repair should the product prove to be defective or non-conforming, is on the retail purchaser, the buyer, the ultimate consumer, of such product and it is not upon the seller, distributor, or manufacturer.

In this connection, the retail purchaser, the buyer, the ultimate consumer assumes the burden of the entire cost of any and all necessary service, alterations, or repair.

© 2017 Hooker Headers, Inc. All rights reserved. Tous Droits Réservés.


**199R11359**

**Revision Date: 8-2-19**



**1993-2002 GM F-Body T56/T56 Magnum/4L60-4L70\*/4L80-4L85\*/TH400\*/2004R\***  
**Transmission Crossmembers**  
**71222001HKR & 71222002HKR**  
**Installation Instructions**

\* Installation requires the use of a separately available Hooker transmission adapter kit. 4L80-4L85 installations will require notching/modifications to the body bracing on the driver's side of the transmission tunnel.

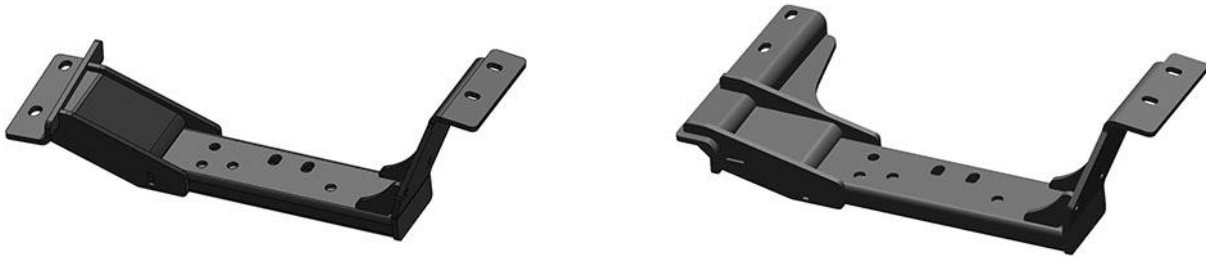

Thank you for choosing to use a Hooker™ transmission crossmember as part of your performance project. These crossmembers were designed for use as part of a 4<sup>th</sup>-gen F-body LS engine swap project, or as part of a non-stock transmission swap into a 1998-2002 LS equipped 4<sup>th</sup>-gen F-body vehicle. Please read these instructions in their entirety before attempting installation.

### **PRE-INSTALLATION CONSIDERATIONS:**

These crossmembers have been CAD designed to provide an optimized balance of weight, stiffness and strength and the means by which to anchor the stock rear suspension torque arm in installations where that capability is desired (requires the use of the optional **71223005HKR** adjustable torque arm mounting bracket kit). Direct installation capability for 4<sup>th</sup>-gen F-body and aftermarket Tremec T56 Magnum transmissions is provided by these crossmembers; installation of a 4L60-4L70, 4L80/4L85, TH400 or 2004R automatic transmission can also be accomplished using this crossmember and the Hooker **12650HKR**, **71223003HKR** or **71223004HKR** adapter kits referenced later in this document.

Installation of these crossmembers, with any of the above mentioned transmissions, requires the use of an aftermarket 71223029HKR or 71223030HKR polyurethane mount or the stock/aftermarket rubber mount of which it is a replacement for.

A suitable lifting jack will be required to install this crossmember with the appropriate transmissions for which it is intended. An automotive lift or a jack and jack stands will be required to safely raise and support the vehicle.

**CAUTION! WORK ONLY ON A LEVEL SURFACE. USE JACKS /JACK STANDS OF SUFFICIENT CAPACITY TO LIFT AND SUPPORT YOUR VEHICLE. NEVER WORK UNDER A VEHICLE SUPPORTED BY A FLOOR OR BUMPER JACK.**

### **INSTALLATION:**

**NOTE:** These instructions have been written with the assumption that there is an LS engine present in your car that is mounted to the engine cradle with either stock GM or Hooker 4<sup>th</sup>-gen F-body LS swap engine brackets. Successful installation of these crossmembers with any other type or brand of engine brackets is questionable.

1. Check that the hardware package includes the following:

| Qty. | Description          |
|------|----------------------|
| 1    | Crossmember Assembly |
| 1*   | T56 Magnum Spacer    |

If any are missing, please contact Technical Service at 1-866-464-6553 or 270-781-9741.

\*If you are installing a T56 Magnum transmission, the included two-hole spacer is to be installed between the crossmember and the isolator to compensate for the isolator mounting surface of the T56 Magnum being closer to the transmission output shaft centerline than the same surface on an LS 4<sup>th</sup>-gen F-Body T56. Leaving this spacer out will increase the engine inclination angle beyond that intended by Hooker™ and decrease the ground clearance of Hooker™ headers and/or exhaust systems designed for this application.

2. Raise and support the vehicle on a jack stands or an automotive lift.

3. Support the rear of the transmission with a floor jack or other suitable lifting device and remove the existing transmission crossmember from the vehicle, if present.
4. Install the Hooker crossmember to the car in the following manner:

**4<sup>th</sup>-gen F-body T56 /T56 Magnum installations** – Install a 71223029HKR or 71223030HKR polyurethane isolator, or its stock/aftermarket rubber equivalent onto the bottom of the transmission, then attach the Hooker crossmember to the car using the removed factory fasteners. Lower the transmission onto the crossmember and attach the transmission isolator to the crossmember using the fasteners included with the isolator. If the installation is an aftermarket T56 Magnum application, insert the included 2-hole spacer between the isolator and the crossmember as the transmission is being lowered onto the crossmember.

**4L60-4L70 installations** – Install a 71223029HKR or 71223030HKR polyurethane isolator, or its stock/aftermarket rubber equivalent onto the bottom of the transmission. Attach the available **71223003HKR** adapter bracket to the center of the Hooker crossmember, as shown in **Images 1&2**, then attach the crossmember to the car using the removed factory fasteners. Lower the transmission onto the crossmember adapter and attach the transmission isolator to the adapter using the fasteners included with the isolator.

**4L80-4L85 installations** – Install a 71223029HKR or 71223030HKR polyurethane isolator, or its stock/aftermarket rubber equivalent onto the bottom of the transmission. Attach the available **71223004HKR** adapter bracket to the center of the Hooker crossmember, as shown in **Images 3 & 4**, then attach the crossmember to the car using the removed factory fasteners. Lower the transmission onto the crossmember adapter and attach the transmission isolator to the adapter using the fasteners included with the isolator.



Image 1



Image 2



Image 3



Image 4

**TH400/2004R installations-** Install a 71223029HKR or 71223030HKR polyurethane isolator, or its stock/aftermarket rubber equivalent onto the bottom of the transmission, then attach the crossmember to the car using the removed factory fasteners. Place the available **12650HKR** adapter block between the crossmember and isolator and lower the transmission onto the adapter block. Attach the transmission adapter block and isolator to the crossmember using the fasteners included with the adapter block.

**NOTE:** The optional Hooker **71223005HKR** adjustable torque arm bracket can be used with any of the above transmission installations for those wanting or needing a torque arm anchor mechanism that is compatible with these crossmembers.

## **COMPATIBILITY INFORMATION:**

These transmission crossmembers were specifically designed for bolt-in compatibility with the HOOKER™ LS swap engine mounting bracket kits, headers and exhaust systems also developed for this vehicle application, or for use in swapping various non-stock transmissions into a 1998-2002 F-body vehicle.

Hooker™ **70201301-RHKR** and **70201302-RHKR** 1998-2002 F-body mid-length headers and dual exhaust systems are installation compatible with these crossmembers; installation of Hooker dual exhaust systems on a 1993-97 F-body will require the installation of a Hooker 71223002HKR body notch panel, or similar clearancing action to the driver side body brace to obtain the needed clearance.

More LS swap/engine performance components, such as EFI fuel control systems, fuel filters, fuel pumps, plumbing hose/fittings and valve covers can be found at [www.holley.com](http://www.holley.com).

## **LIMITATION OF LIABILITY – DISCLAIMER:**

The regulation of emissions production, noise levels, and safety standards is undertaken by the federal government, each of the fifty state legislatures, and by many local municipalities, towns, and counties.

HOOKER™ makes no warranties of merchantability, of fitness for particular purpose, or that its products are approved for general use, or that its products comply with laws, regulations, or ordinances in the state where they may be sold to the ultimate purchaser, the consumer.

Unless expressly stated to the contrary in the catalog, instruction sheet; or price list, the entire risk as to the conformity of any company product in any such state and as to repair should the product prove to be defective or non-conforming, is on the retail purchaser, the buyer, the ultimate consumer, of such product and it is not upon the seller, distributor, or manufacturer.

In this connection, the retail purchaser, the buyer, the ultimate consumer assumes the burden of the entire cost of any and all necessary service, alterations, or repair.


© 2015 Hooker Headers, Inc. All rights reserved. Tous Droits Réservés.

**199R10877**


**Revision Date: 7-7-20**



## Hooker Transmission Crossmember Adapter Bracket Kits 71223003HKR (4L60-4L70) & 71223004HKR (4L80-4L85) Installation Instructions

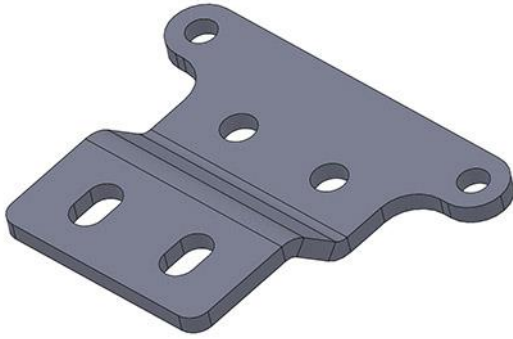

**4L60-4L70**

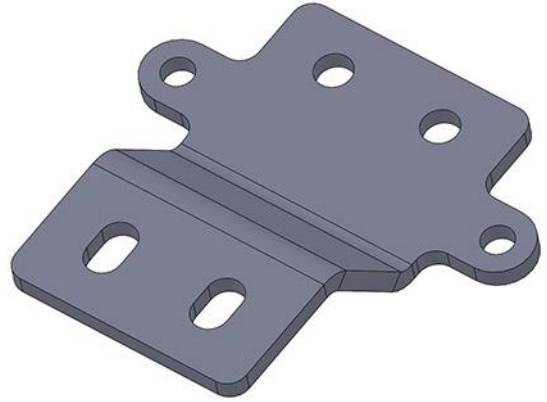

**4L80-4L85**

Thank you for choosing to use a Hooker™ transmission crossmember as part of your LS swap project. The components contained in this package are designed and intended for installation only with specific Hooker LS swap transmission crossmembers. Please refer to the instructions included with the compatible Hooker crossmember you are using for proper installation of these parts.

1. Check that the hardware package includes the following:

| Qty. | Description      | Qty. | Description    |
|------|------------------|------|----------------|
| 1    | Bracket Assembly | 2    | 7/16 x 1 Bolts |
| 2    | 3/8 x 1" Bolts   | 2    | 7/16 Nuts      |
| 2    | 3/8 Nuts         |      |                |

If any are missing, please contact Technical Service at 1-866-464-6553 or 270-781-9741.

No other use of these components is intended, implied or recommended by Holley Performance Products.

### **LIMITATION OF LIABILITY – DISCLAIMER:**

The regulation of emissions production, noise levels, and safety standards is undertaken by the federal government, each of the fifty state legislatures, and by many local municipalities, towns, and counties.

HOOKER™ makes no warranties of merchantability, of fitness for particular purpose, or that its products are approved for general use, or that its products comply with laws, regulations, or ordinances in the state where they may be sold to the ultimate purchaser, the consumer.

Unless expressly stated to the contrary in the catalog, instruction sheet; or price list, the entire risk as to the conformity of any company product in any such state and as to repair should the product prove to be defective or non-conforming, is on the retail purchaser, the buyer, the ultimate consumer, of such product and it is not upon the seller, distributor, or manufacturer.

In this connection, the retail purchaser, the buyer, the ultimate consumer assumes the burden of the entire cost of any and all necessary service, alterations, or repair.


© 2017 Hooker Headers, Inc. All rights reserved.

**199R10879**

**Revision Date: 12-15-17**



## Hooker 1993-2002 GM F-Body Adjustable Torque Arm Bracket 71223005HKR Installation Instructions



Thank you for choosing to use this Hooker™ component as part of your performance project. This bracket is compatible for use with Hooker **71222001HKR** and **71222002HKR** 4<sup>th</sup>-gen F-body transmission crossmembers only. Please read these instructions in their entirety before attempting installation.

### **PRE-INSTALLATION CONSIDERATIONS:**

This adapter is designed to provide the user of a Hooker **71222001HKR** or **71222002HKR** 4<sup>th</sup>-gen F-body transmission crossmember with a bolt-on adjustable torque arm mounting solution, which can be used to divorce the torque arm from any stock 4<sup>th</sup>-gen T56 or 4L60 transmission, or to provide torque arm anchorage for non-stock T56 Magnum, 4L60-4L70, TH400, 2004R and 4L80-4L85 transmission swaps. Installation/use of this bracket will allow the torque arm to be installed in the factory stock position, or in a modified position to affect the instant center of the rear suspension.

Installation of this bracket will require the use of an Energy Suspension® **3-1111R** or **31111G** torque arm bushing.

**CAUTION!** WORK ONLY ON A LEVEL SURFACE. USE JACKS /JACKSTANDS OF SUFFICIENT CAPACITY TO LIFT AND SUPPORT YOUR VEHICLE. NEVER WORK UNDER A VEHICLE SUPPORTED BY A FLOOR OR BUMPER JACK.

### **INSTALLATION:**

**NOTE:** These instructions have been written with the assumption that a Hooker **71222001HKR** or **71222002HKR** 4<sup>th</sup>-gen F-body transmission crossmember has been installed into the vehicle and the stock torque arm bushing/bracket has been removed from the vehicle.

1. Check that the hardware package includes the following:

| Qty. | Description             | Qty. | Description      |
|------|-------------------------|------|------------------|
| 1    | Main Bracket Assembly   | 4    | 5/16 Nylock Nuts |
| 1    | Isolator Saddle Bracket | 2    | 7/16 x 1" Bolts  |
| 4    | 5/16 x 3/4" Bolts       | 2    | 7/16 Nuts        |

If any are missing, please contact Technical Service at 1-866-464-6553 or 270-781-9741.

1. Raise and support the vehicle on a jack stands or an automotive lift.
2. Apply a light spray penetrating oil to the end of the torque arm and install the Energy Suspension® bushing onto the torque arm as depicted in **Figure 1**. When properly installed, the square-most corner of the bushing will be positioned at the top left corner of the assembly (viewed from the represented angle of the photo).



**Figure 1**

3. Place the main bracket assembly foot directly over the two far-left side holes in the center beam of the Hooker crossmember. Bend in foot pointing to the center of the car and install the (x2) supplied 7/16" bolts into the holes in the foot and through the crossmember.
4. Loosely install the (x2) supplied 7/16" nuts onto the bolts through the access holes in the bottom of the center beam. Do not tight the bolts/nuts at this time.
5. Pull/push the torque arm downward and/or sideways to allow installation of the (x1) supplied isolator saddle bracket over the isolator.
6. Move the isolator and attached saddle bracket back and forth as needed to line up the mounting holes in the saddle bracket with the mounting holes in the torque arm bracket.
7. Attach the saddle bracket to the torque arm with the (x4) supplied 5/16" bolts and nuts. Installing the top two bolts/nuts in the 3<sup>rd</sup> set of holes down from the top of the torque arm bracket will provide attachment of the torque arm in the factory stock position.
8. Tighten the bolts/nuts attaching the saddle bracket to the torque arm bracket and also the 7/16" bolts/nuts attaching the torque arm bracket to the crossmember.

**Adjustment** - If you wish to adjust the mounting height of the torque are, simply remove the 5/16" bolts/nuts from the isolator saddle bracket and move the saddle to a different desired set of holes before reinstalling and tightening the hardware. Raising the torque arm mount will raise the instant center and increase the anti-squat characteristics of the vehicle.

#### **LIMITATION OF LIABILITY – DISCLAIMER:**

The regulation of emissions production, noise levels, and safety standards is undertaken by the federal government, each of the fifty state legislatures, and by many local municipalities, towns, and counties.

HOOKER™ makes no warranties of merchantability, of fitness for particular purpose, or that its products are approved for general use, or that its products comply with laws, regulations, or ordinances in the state where they may be sold to the ultimate purchaser, the consumer.

Unless expressly stated to the contrary in the catalog, instruction sheet; or price list, the entire risk as to the conformity of any company product in any such state and as to repair should the product prove to be defective or non-conforming, is on the retail purchaser, the buyer, the ultimate consumer, of such product and it is not upon the seller, distributor, or manufacturer.

In this connection, the retail purchaser, the buyer, the ultimate consumer assumes the burden of the entire cost of any and all necessary service, alterations, or repair.

© 2015 Hooker Headers, Inc. All rights reserved.

**199R10880**

**Date: 8-21-15**



**Transmission Polyurethane Mount - GM**  
**71223029HKR & 71223030HKR**  
**Installation Instructions**



Thank you for choosing to use the Hooker BlackHeart™ transmission mount as part of your performance vehicle project. Please read thoroughly and understand these instructions before attempting installation.

**PRE-INSTALLATION CONSIDERATIONS:**

These polyurethane transmission mounts may be used as a direct replacement for stock GM rubber mounts that measure 1.75" in height. Replacement of mounts with a greater height than 1.75" can be accommodated with the use of shim washers between the crossmember and the mount.

The polyurethane construction is capable of high horsepower applications while preserving vibration dampening and the safety interlock design of the inner components ensures that even if the polyurethane fails the mount will not separate. These polyurethane mounts are capable of fitting either a one or two stud type of crossmember interface.

**BEFORE BEGINNING:**


Check that the package contains the following hardware:

| 71223029HKR |                                       |
|-------------|---------------------------------------|
| Qty.        | Description                           |
| 1           | Black Polyurethane Transmission Mount |
| 2           | 7/16"-14 x 1.5" Studs                 |
| 2           | 7/16"-14 Hex Nuts                     |
| 2           | Flat Washers                          |
| 2           | Lock Washers                          |

| 71223030HKR |                                     |
|-------------|-------------------------------------|
| Qty.        | Description                         |
| 1           | Red Polyurethane Transmission Mount |
| 2           | 7/16"-14 x 1.5" Studs               |
| 2           | 7/16"-14 Hex Nuts                   |
| 2           | Flat Washers                        |
| 2           | Lock Washers                        |

## **INSTALLATION:**

1. Determine if your application requires a one or two stud crossmember interface. Install the supplied stud(s) (7/16"-14 x 1.5") into the appropriate threaded holes in the polyurethane mount with a 7/32" hex key. If no hex key is available, the studs can also be installed into the mount by "double nutting" the end of the stud with the supplied hex nuts. Install the stud(s) until firmly seated in place.
2. Install the mount onto the crossmember with hardware provided (shown in **Figure 1**). Do not tighten the hex nuts at this time.
3. Install the factory transmission bolts (user supplied). Do not tighten the bolts at this time.
4. Confirm alignment of the polyurethane mount with the transmission and crossmember. Tighten and torque the transmission bolts to factory torque specifications. Also tighten and torque the crossmember hex nut(s) to 49 ft./lbs.

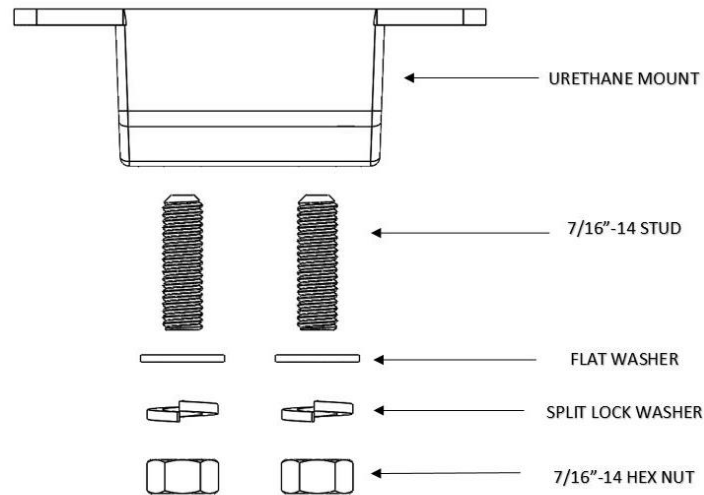

**Figure 1**

## **LIMITATION OF LIABILITY – DISCLAIMER:**

HOOKER™ BLACKHEART makes no warranties of merchantability, of fitness for particular purpose, or that its products are approved for general use, or that its products comply with laws, regulations, or ordinances in the state where they may be sold to the ultimate purchaser, the consumer.

Unless expressly stated to the contrary in the catalog, instruction sheet, or price list, the entire risk as to the conformity of any company product in any such state and as to repair should the product prove to be defective or non-conforming, is on the retail purchaser, the buyer, the ultimate consumer, of such product and it is not upon the seller, distributor, or manufacturer.

In this connection, the retail purchaser, the buyer, the ultimate consumer assumes the burden of the entire cost of any and all necessary service, alterations, or repair.

© 2018 Hooker Headers, Inc. All rights reserved. Tous Droits Réservés.

**199R11754**

**Date: 1-24-19**