




Chrysler Transmission Pans

P/N's 42080 & 42090

PARTS LIST

- | | |
|------------------------------|--|
| 1 Transmission Pan | 3 Bolts, 10 -24 x 2" |
| 2 Magnetic Drain Plugs | 3 Washers, 1/4" |
| 1 Filter Spacer | 2 Spacer Gaskets |
| 14 Serrated Flange Hex Bolts | 2 5/16-18 x 1 Serrated Flng. Hex Bolts |

1. Drain fluid from transmission and remove old pan.
2. Clean any old gasket material from the pan-mounting surface. Check that all new parts are free of any debris and then clean all parts before installing.
3. Remove filter, clean thoroughly or replace with a new one. Re-install the filter with the supplied Filter Spacer, Gaskets and the three 10 -24 x 2" Bolts and 1/4" Washers (see diagram below). Place a Gasket between the Filter and the Filter Spacer and place the other Gasket between the Filter Spacer and the mounting area. Tighten the three 10 -24 x 2" Bolts and 1/4" Washers to the factory torque specification.
4. Place a new gasket on the pan rail, tighten the pan with the Serrated Flange Hex Bolts Torque to 10 ft.-lbs. (NOTE: Moroso Performance does not recommend using any type of sealer on the gasket. Small pieces may dislodge and clog the transmission or transbrake internals resulting in failure). Check that all the Drain Plugs are tight.
5. The Moroso Transmission Pan holds more fluid than a stock shallow sump type pan, so be certain to fill your transmission to the proper level as indicated on the dipstick.

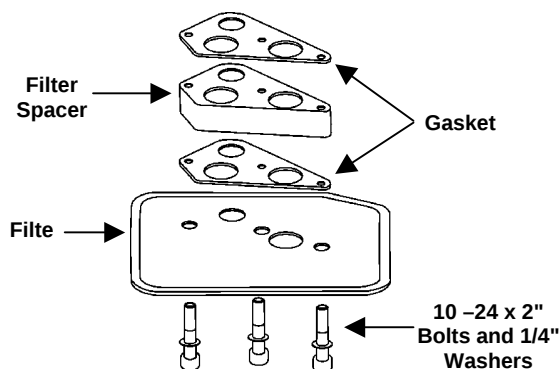

*For Technical Assistance, Call Moroso's Tech Line at
(203) 458-0542, 458-0546 8:30am - 5:00pm Eastern Time*

MOROSO PERFORMANCE PRODUCTS, INC
80 CARTER DR • GUILFORD, CT 06437
Phone: (203) 453-6571 • FAX (203) 453-6906

Visit Us At www.moroso.com

42080INST




Chrysler Transmission Pans

P/N's 42080 & 42090

PARTS LIST

- | | |
|------------------------------|--|
| 1 Transmission Pan | 3 Bolts, 10 -24 x 2" |
| 2 Magnetic Drain Plugs | 3 Washers, 1/4" |
| 1 Filter Spacer | 2 Spacer Gaskets |
| 14 Serrated Flange Hex Bolts | 2 5/16-18 x 1 Serrated Flng. Hex Bolts |

1. Drain fluid from transmission and remove old pan.
2. Clean any old gasket material from the pan-mounting surface. Check that all new parts are free of any debris and then clean all parts before installing.
3. Remove filter, clean thoroughly or replace with a new one. Re-install the filter with the supplied Filter Spacer, Gaskets and the three 10 -24 x 2" Bolts and 1/4" Washers (see diagram below). Place a Gasket between the Filter and the Filter Spacer and place the other Gasket between the Filter Spacer and the mounting area. Tighten the three 10 -24 x 2" Bolts and 1/4" Washers to the factory torque specification.
4. Place a new gasket on the pan rail, tighten the pan with the Serrated Flange Hex Bolts Torque to 10 ft.-lbs. (NOTE: Moroso Performance does not recommend using any type of sealer on the gasket. Small pieces may dislodge and clog the transmission or transbrake internals resulting in failure). Check that all the Drain Plugs are tight.
5. The Moroso Transmission Pan holds more fluid than a stock shallow sump type pan, so be certain to fill your transmission to the proper level as indicated on the dipstick.

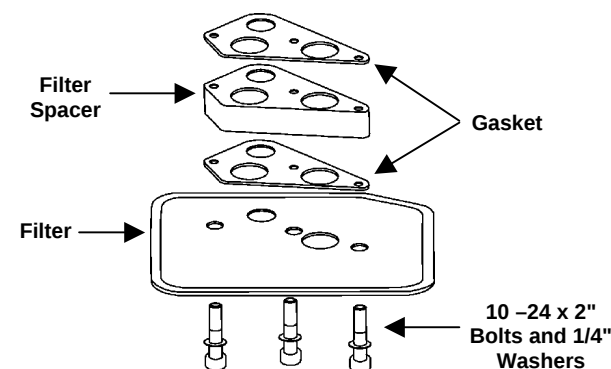

*For Technical Assistance, Call Moroso's Tech Line at
(203) 458-0542, 458-0546 8:30am - 5:00pm Eastern Time*

MOROSO PERFORMANCE PRODUCTS, INC
80 CARTER DR • GUILFORD, CT 06437
Phone: (203) 453-6571 • FAX (203) 453-6906

Visit Us At www.moroso.com

42080INST