



INSTALLATION INSTRUCTIONS

P/N 65965 & 65966

PARTS LIST

- 1 MOUNTING PLATE
- 4 HOLD DOWN CLAMPS
- 4 SUPPORT RODS
- 1 CABLE CLIP
- 1 1/4" BORE X 10-32 THREAD ROD END
- 4 1/4-20 X 5/8" BOLTS
- 8 10-32 X 1" BOLTS
- 2 10-32 X 1/2" BOLTS
- 10 10-32 NUTS
- 8 1/4" WASHERS

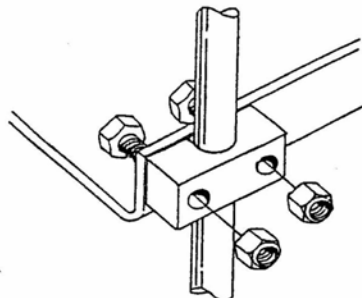


Fig. 1

1. Fabricate or use a Moroso Carburetor Air Pan Kit (P/N's 65950, 65951, 65960, or 65961 - see catalog for applications) to mount your scoop to.
2. Install the mounting plate between the carburetor and the intake manifold.
3. Install the support rods using the hold down clamps and 10-32 x 1" bolts and nuts to the mounting plate as shown in Figure #1 with the threaded end of the support rod up.
4. Put air pan on top of carb and adjust the support rods so they touch the bottom of the air pan. Do not shorten the support rods if at all possible. By leaving them long you can add carb spacers without making new support rods.
5. Mark the support rod location on the air pan and drill out with a 5/16" drill. Do one support rod at a time. Bolt the support rod to the air pan using two 1/4" washers to sandwich the air pan between the support rod and the 1/4-20 bolt head. Doing one support rod at a time will ensure that all parts will line up when you are done.
6. Once the support rods are installed to the air pan, the air pan can be assembled to the scoop.
7. If you are using a Morse type throttle cable, install the 1/4" bore x 10-32 thread rod end to it and assemble the cable into the cable clip. Using two 10-32 x 1/2" bolts and nuts, install cable clip to mounting plate. Use Moroso Carburetor Linkage Bushing Set (P/N 64920) and Carburetor Throttle Return Spring Kit (P/N 64929) to complete the throttle cable installation.
8. Install air pan/scoop and support rod assembly down over the carb and slide the support rods through the hold down clamps. Tighten the hold down clamp bolts.

**For Technical Assistance, Call Moroso's Tech Line at
(203) 458-0542, 8:30am – 5:00pm Eastern Time**

MOROSO PERFORMANCE PRODUCTS, INC
80 CARTER DR • GUILFORD, CT 06437-2116
Phone: (203) 453-6571 • Fax: (203) 453-6906