


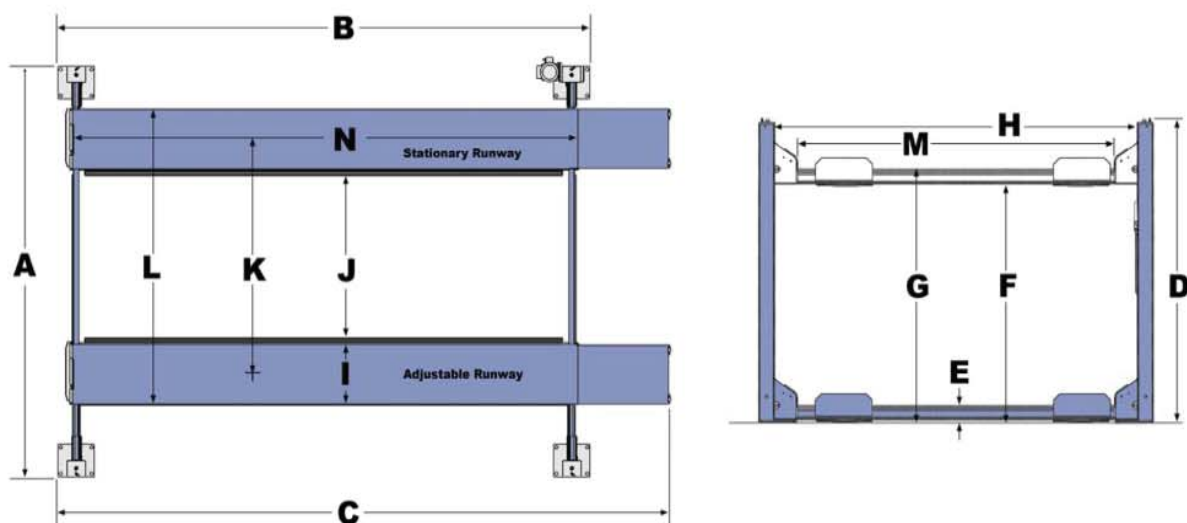

IMPORTANT NOTE

Check Diagonal Measurements To Ensure Square Layout Diagonal Measurements Must Be Equal.

Lifting Capacity*	7,500 lbs. / 3402 kg.	7,500 lbs. / 3402 kg.
*Max Capacity / Front Half of Lift	3,750 lbs. / 1701 kg.	3,750 lbs. / 1701 kg.
*Max Capacity / Rear Half of Lift	3,750 lbs. / 1701 kg.	3,750 lbs. / 1701 kg.
A - Overall Width	132" / 3353 mm.	132" / 3353 mm.
B - Outside Length	174" / 4418 mm.	198" / 5028 mm.
C - Overall Length	200" / 5087 mm.	224" / 5704 mm.
D - Height of Columns	88" / 2232 mm.	100" / 2537 mm.
E - Min. Runway Height	5" / 125 mm.	5" / 125 mm.
F - Max. Rise	70" / 1778 mm.	82" / 2083 mm.
G - Max. Lifting Height	75" / 1905 mm.	87" / 2208 mm.
H - Width Between Columns	122" / 3099 mm.	122" / 3099 mm.
I - Runway Width	19" / 482 mm.	19" / 482 mm.
J - Width Between Runways (*) NARROW SETTING	49-1/2" / 1257 mm.	49-1/2" / 1257 mm.
J - Width Between Runways (*) WIDE SETTING	69-1/2" / 1765 mm.	69-1/2" / 1765 mm.
K - Runway Centerline (*) NARROW SETTING	68-1/2" / 1740 mm.	68-1/2" / 1740 mm.
K - Runway Centerline (*) WIDE SETTING	88-1/2" / 2248 mm.	88-1/2" / 2248 mm.
L - Outside Edge of Runways (*) NARROW SETTING	87-1/2" / 2222 mm.	87-1/2" / 2222 mm.
L - Outside Edge of Runways (*) WIDE SETTING	107-1/2" / 2730 mm.	107-1/2" / 2730 mm.
M - Drive-Thru-Clearance	108-1/2" / 2756 mm.	108-1/2" / 2756 mm.
N - Length of Runways	164" / 4166 mm.	188" / 4775 mm.
Min. Wheelbase @ Rated Capacity	115" / 2921 mm.	135" / 3429 mm.
Min. Wheelbase @ 75% Capacity	100" / 2540 mm.	115" / 2921 mm.
Min. Wheelbase @ 50% Capacity	85" / 2159 mm.	95" / 2413 mm.
Min. Wheelbase @ 25% Capacity	70" / 1778 mm.	80" / 2032 mm.
Locking Positions	12	15
Lock Spacing	Every 4" / 102 mm.	Every 4" / 102 mm.
Lifting Time	45 Seconds	50 Seconds
Standard Motor (**)	220 VAC / 60 Hz. 1Ph.	220 VAC / 60 Hz. 1Ph.

* This dimension may be limited with the addition of rolling jacks. See rolling jack specifications on separate page.

** Special Voltages Available Upon Request

The design, material and specifications are subject to change without notice.